


Saranac Lake

NEW YORK

1:25 000-scale metric
topographic map of

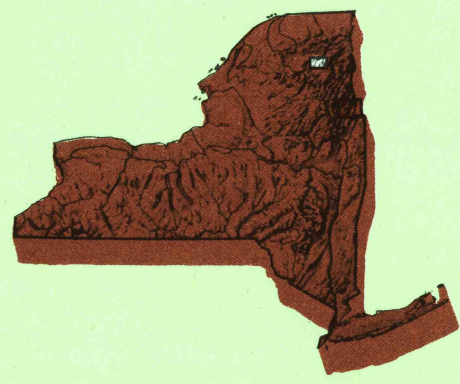

7.5 X 15 MINUTE QUADRANGLE SHOWING

- Contours and elevations in meters
- Highways, roads and other manmade structures
- Water features
- Woodland areas
- Geographic names

U.S. Department of the Interior
U.S. Geological Survey

1999

Produced by the United States Geological Survey
Derived from imagery taken 1976 and other sources
Photinspected using imagery taken 1999; no major culture or drainage changes observed. Survey control current as of 1976. Boundaries, other than corporate, verified 2001

North American Datum of 1927 (NAD 27). Projection and 1000-meter grid: Universal Transverse Mercator, zone 18
10 000-foot ticks: New York coordinate system, east zone
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software

There may be private inholdings within the boundaries of the National or State reservations shown on this map

CONTOUR INTERVAL 10 METERS
SUPPLEMENTARY CONTOUR INTERVAL 5 METERS
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST METER

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS

CONVERSION TABLE		DECLINATION DIAGRAM	ADJOINING MAPS				
Meters	Feet		1	2	3	4	5
1	3.2808		1	2	3		
2	6.5617		4	5			
3	9.8425						
4	13.1234						
5	16.4042						
6	19.6850						
7	22.9659						
8	26.2467						
9	29.5276						
10	32.8084						
To convert meters to feet multiply by 3.2808 To convert feet to meters multiply by 0.3048		UTM grid convergence (GN) and 2001 magnetic declination (MN) at center of map Diagram is approximate					
			1	2	3	4	5
			6	7	8		
			1	2	3	4	5
			6	7	8		
			1	2	3	4	5
			6	7	8		

RECEIVED

ISBN 0-607-96823-0

OCT 3 1 2001

9 780607 968230

HISTORICAL MAP ARCHIVES

Topographic Map Symbols

Primary highway, hard surface	Secondary highway, hard surface	Light-duty road, hard or improved surface	Unimproved road, trail	Route marker: Interstate, U.S., State	Railroad: standard gage; narrow gage	Bridge; drawbridge	Footbridge; overpass; underpass	Built-up area: only selected landmark buildings shown	House; barn; church; school; large structure	Boundary:																
National, with monument	State	County; parish	Civil township, precinct, district	Incorporated city, village, town	National or State reservation; small park	Land grant with monument; found section corner	U.S. public lands survey: range, township; section	Range, township; section line: location approximate	Fence or field line	Power transmission line, located tower	Dam; dam with lock	Cemetery; grave	Campground; picnic area; U.S. location monument	Windmill; water well; spring	Mine shaft; prospect; adit or cave	Control: horizontal station; vertical station; spot elevation	Contours: index; intermediate; supplementary; depression	Distorted surface: strip mine; lava; sand	Bathymetric contour: index; intermediate	Perennial lake and stream; intermittent lake and stream	Rapids, large and small; falls, large and small	Swamp; marsh	Submerged marsh; land subject to controlled inundation	Woodland; scattered trees	Scrub; mangrove	Orchard; vineyard

A pamphlet describing topographic maps is available on request

FOR SALE BY U.S. GEOLOGICAL SURVEY
P.O. BOX 25256, DENVER, COLORADO 80225



TOTAL RECYCLED PAPER


SCALE 1:25 000

1 CENTIMETER ON THE MAP REPRESENTS 250 METERS ON THE GROUND

CONTOUR INTERVAL 10 METERS

SUPPLEMENTARY CONTOUR INTERVAL 5 METERS

INTERIOR—GEOLOGICAL SURVEY, RESTON, VIRGINIA—2001



SARANAC LAKE, NEW YORK

1999