


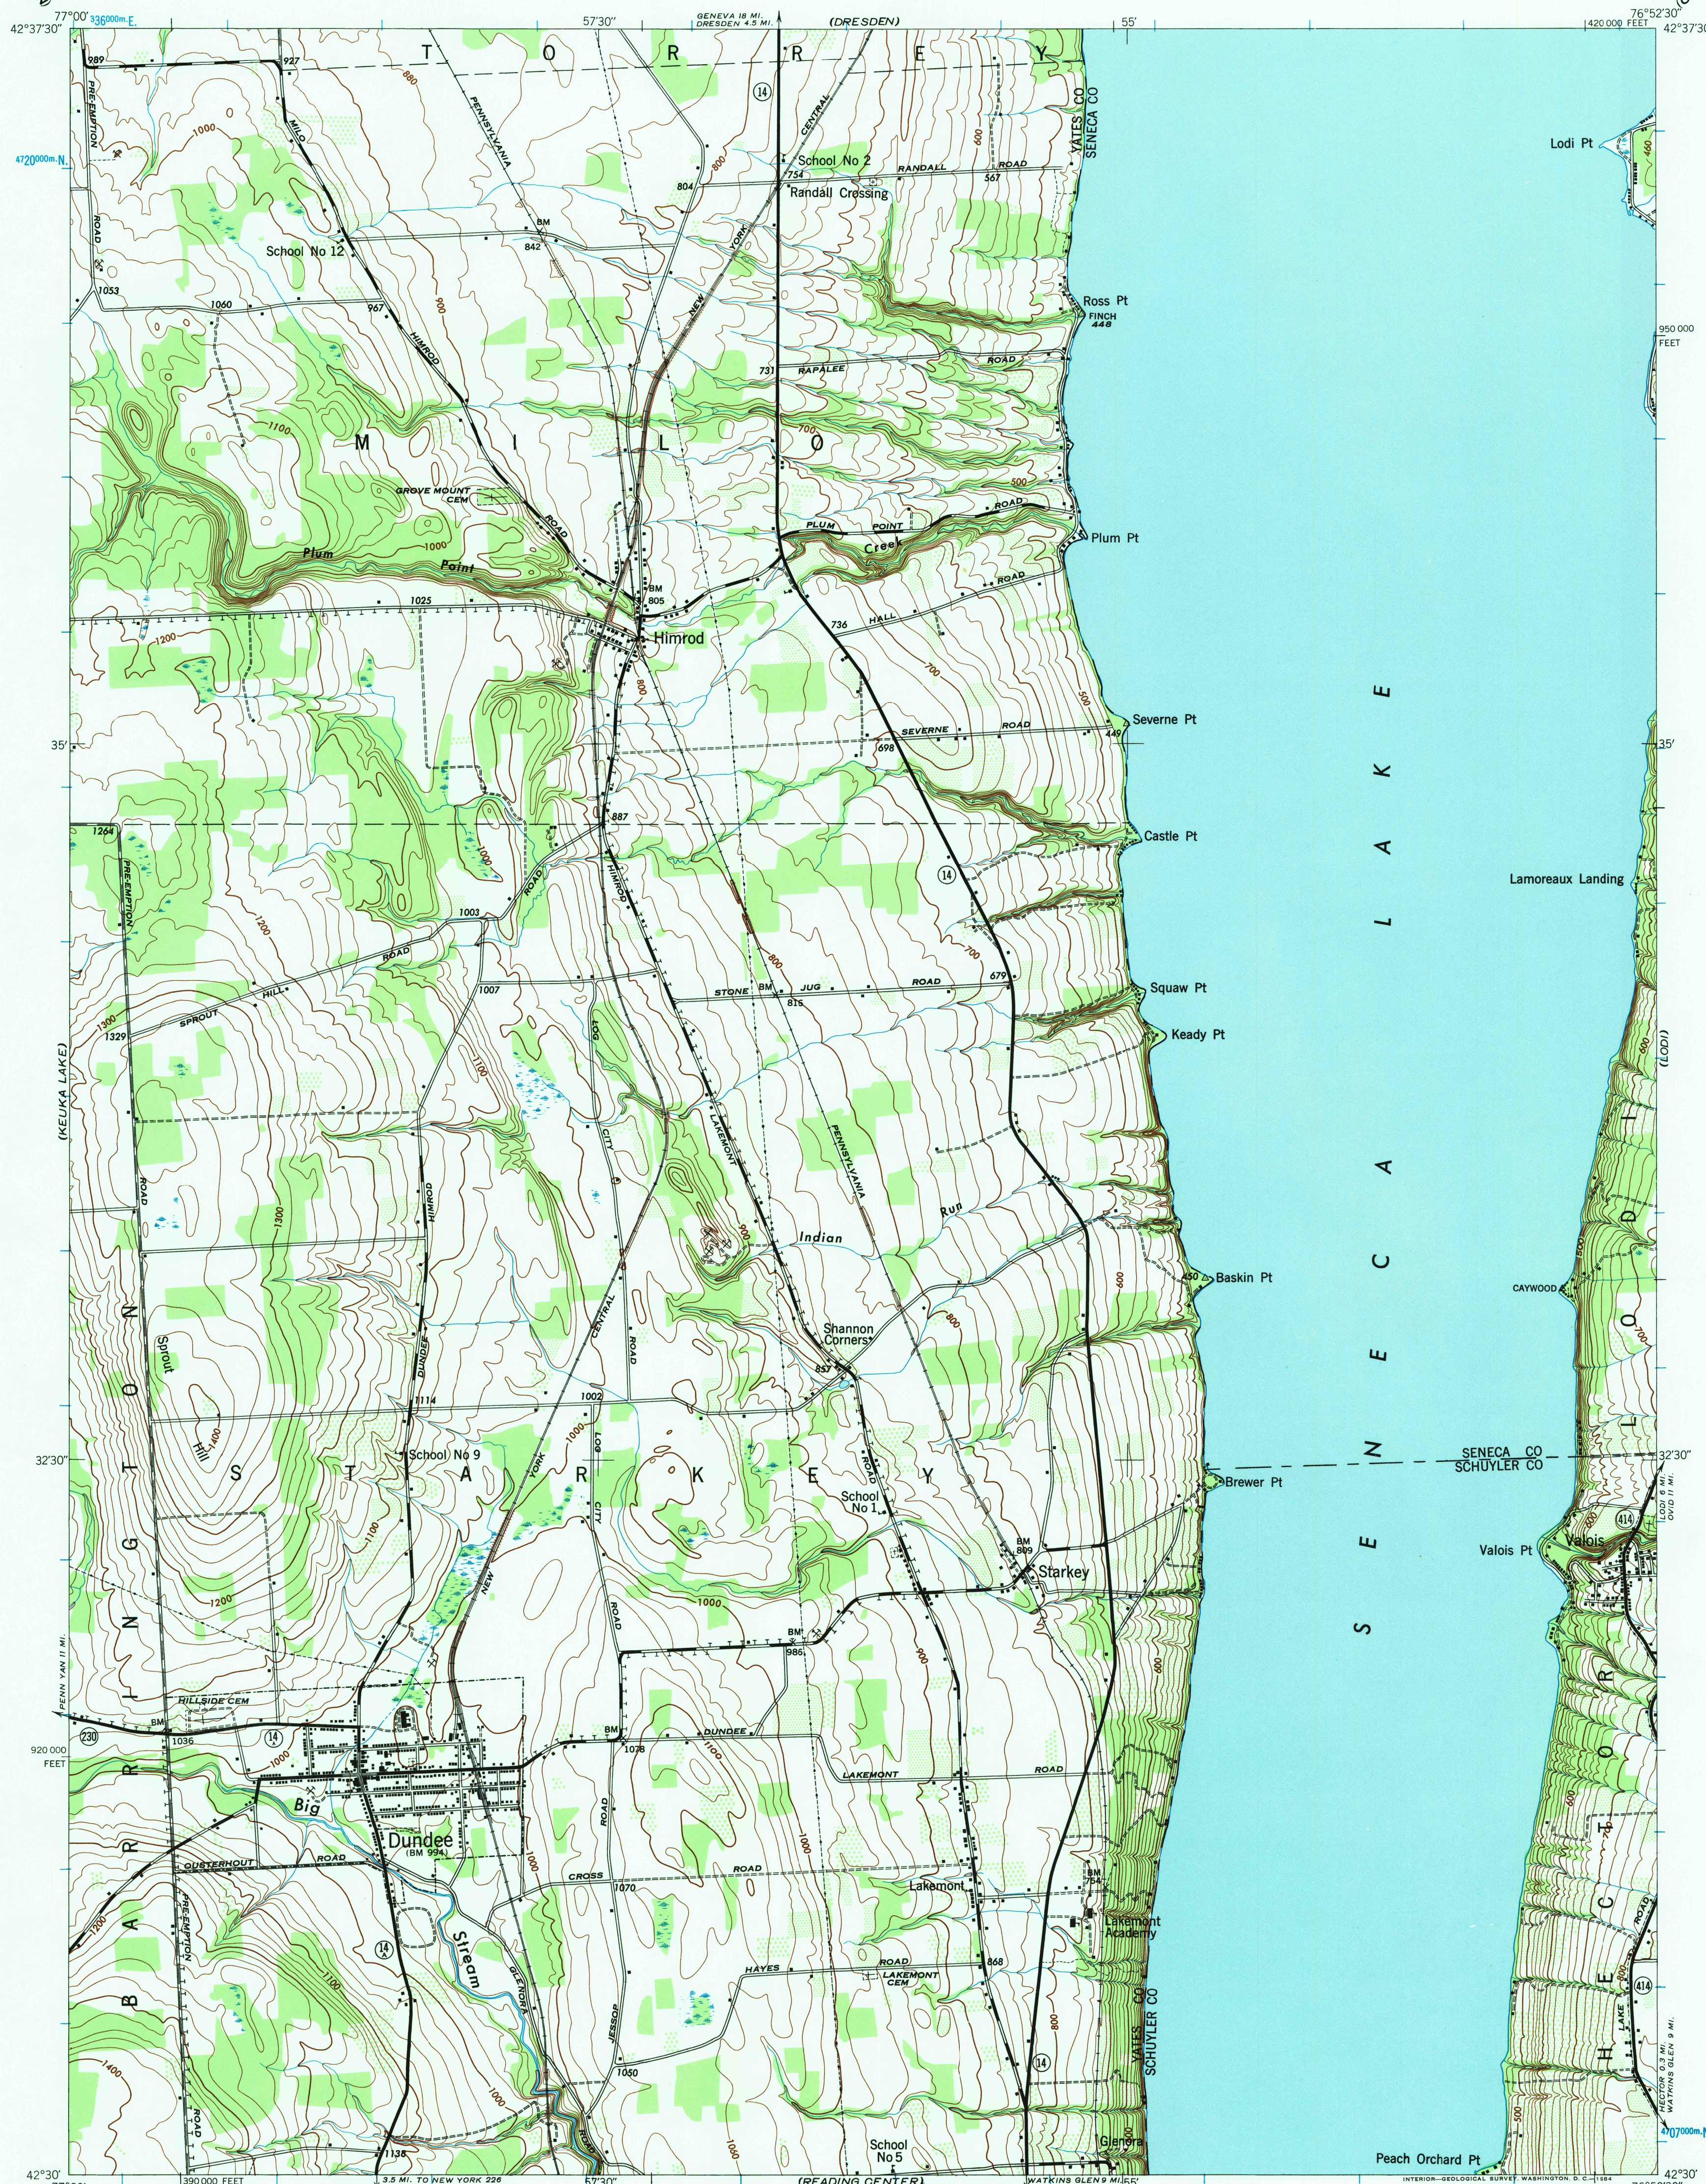

Mapped by Tennessee Valley Authority under direction of the
Chief of Engineers, U. S. Army, 1942.
Topography by U. S. Geological Survey and Tennessee Valley Authority
by Stereophotogrammetric methods (Multiplex).
Control by USC&GS, U. S. Lake Survey, and TVA.
Field completion surveys by TVA.
Wide-angle photography for TVA, 1942.
Polyconic projection. 1927 North American datum.

ROAD CLASSIFICATION

Dependable hard-surface, heavy-duty road. ——— U. S. Route 33
Loose-surface graded, dry weather road. ——— U. S. Route 226
Secondary, hard-surface, all-weather road. ——— State Route
Dirt road. ———
More than two lanes indicated by note along road with tick at point of change. 3 LANE | 4 LANE

Map photoinspected 1976
No major culture or drainage changes observed

SCALE 1:24,000

1 0 1000 2000 3000 4000 5000 6000 7000 FEET

1 0 1 2 KILOMETER

CONTOUR INTERVAL 20 FEET
DATUM IS MEAN SEA LEVEL

10,000-FOOT GRID TICKS, NEW YORK PLANE COORDINATE SYSTEM, EAST ZONE, SHOWN IN BLACK
1000-METER GRID TICKS, UNIVERSAL TRANSVERSE MERCATOR SYSTEM, ZONE 18, SHOWN IN BLUE

REPRINTED FROM MILITARY EDITION FOR CIVIL USE
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN DECLINATION, 1942

DUNDEE, N. Y.
N4230-W7652.5/7.5
1942
PHOTOINSPECTED 1976

RETURN TO:
USGS AND HISTORICAL MAP ARCHIVES