



Mapped and edited by Tennessee Valley Authority
Published by the Geological Survey


Control by USC&GS, USGS, and TVA

Topography by multiplex methods from aerial
photographs taken 1946. Field examination by TVA, 1952

Polyconic projection. 1927 North American datum
10,000-foot grid based on Tennessee rectangular
coordinate system

1000 meter Universal Transverse Mercator Grid ticks,
Zone 16, shown in blue.

334°
TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN
DECLINATION 1955

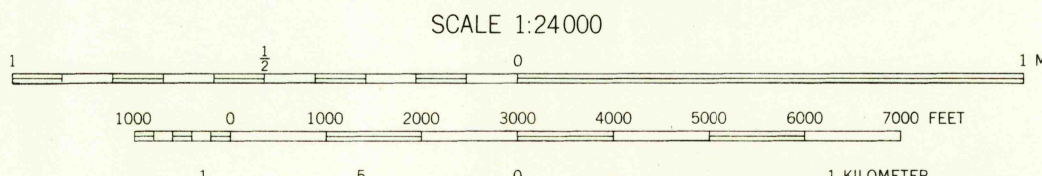

CONTOUR INTERVAL 20 FEET
DASHED LINES REPRESENT HALF-INTERVAL CONTOURS
DATUM IS MEAN SEA LEVEL

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
TENNESSEE DIVISION OF GEOLOGY, NASHVILLE, TENN.
U. S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA OR KNOXVILLE, TENN.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS
HISTORICAL FILE
TOPOGRAPHIC DIVISION



ROAD CLASSIFICATION (TVA 41-NE)
HARD SURFACE ALL WEATHER ROADS DRY WEATHER ROADS
Heavy-duty 4 LANE 18 LANE Improved dirt
Medium-duty 4 LANE 18 LANE Unimproved dirt
Loose-surface, graded, or narrow hard surface
U. S. Route State Route

U.S.G.S.
FILE COPY
TOPOGRAPHIC DIVISION

BEAVERDAM SPRINGS, TENN.
N3537.5-W8730.7/5

1952

MAR 4 1957

2165