


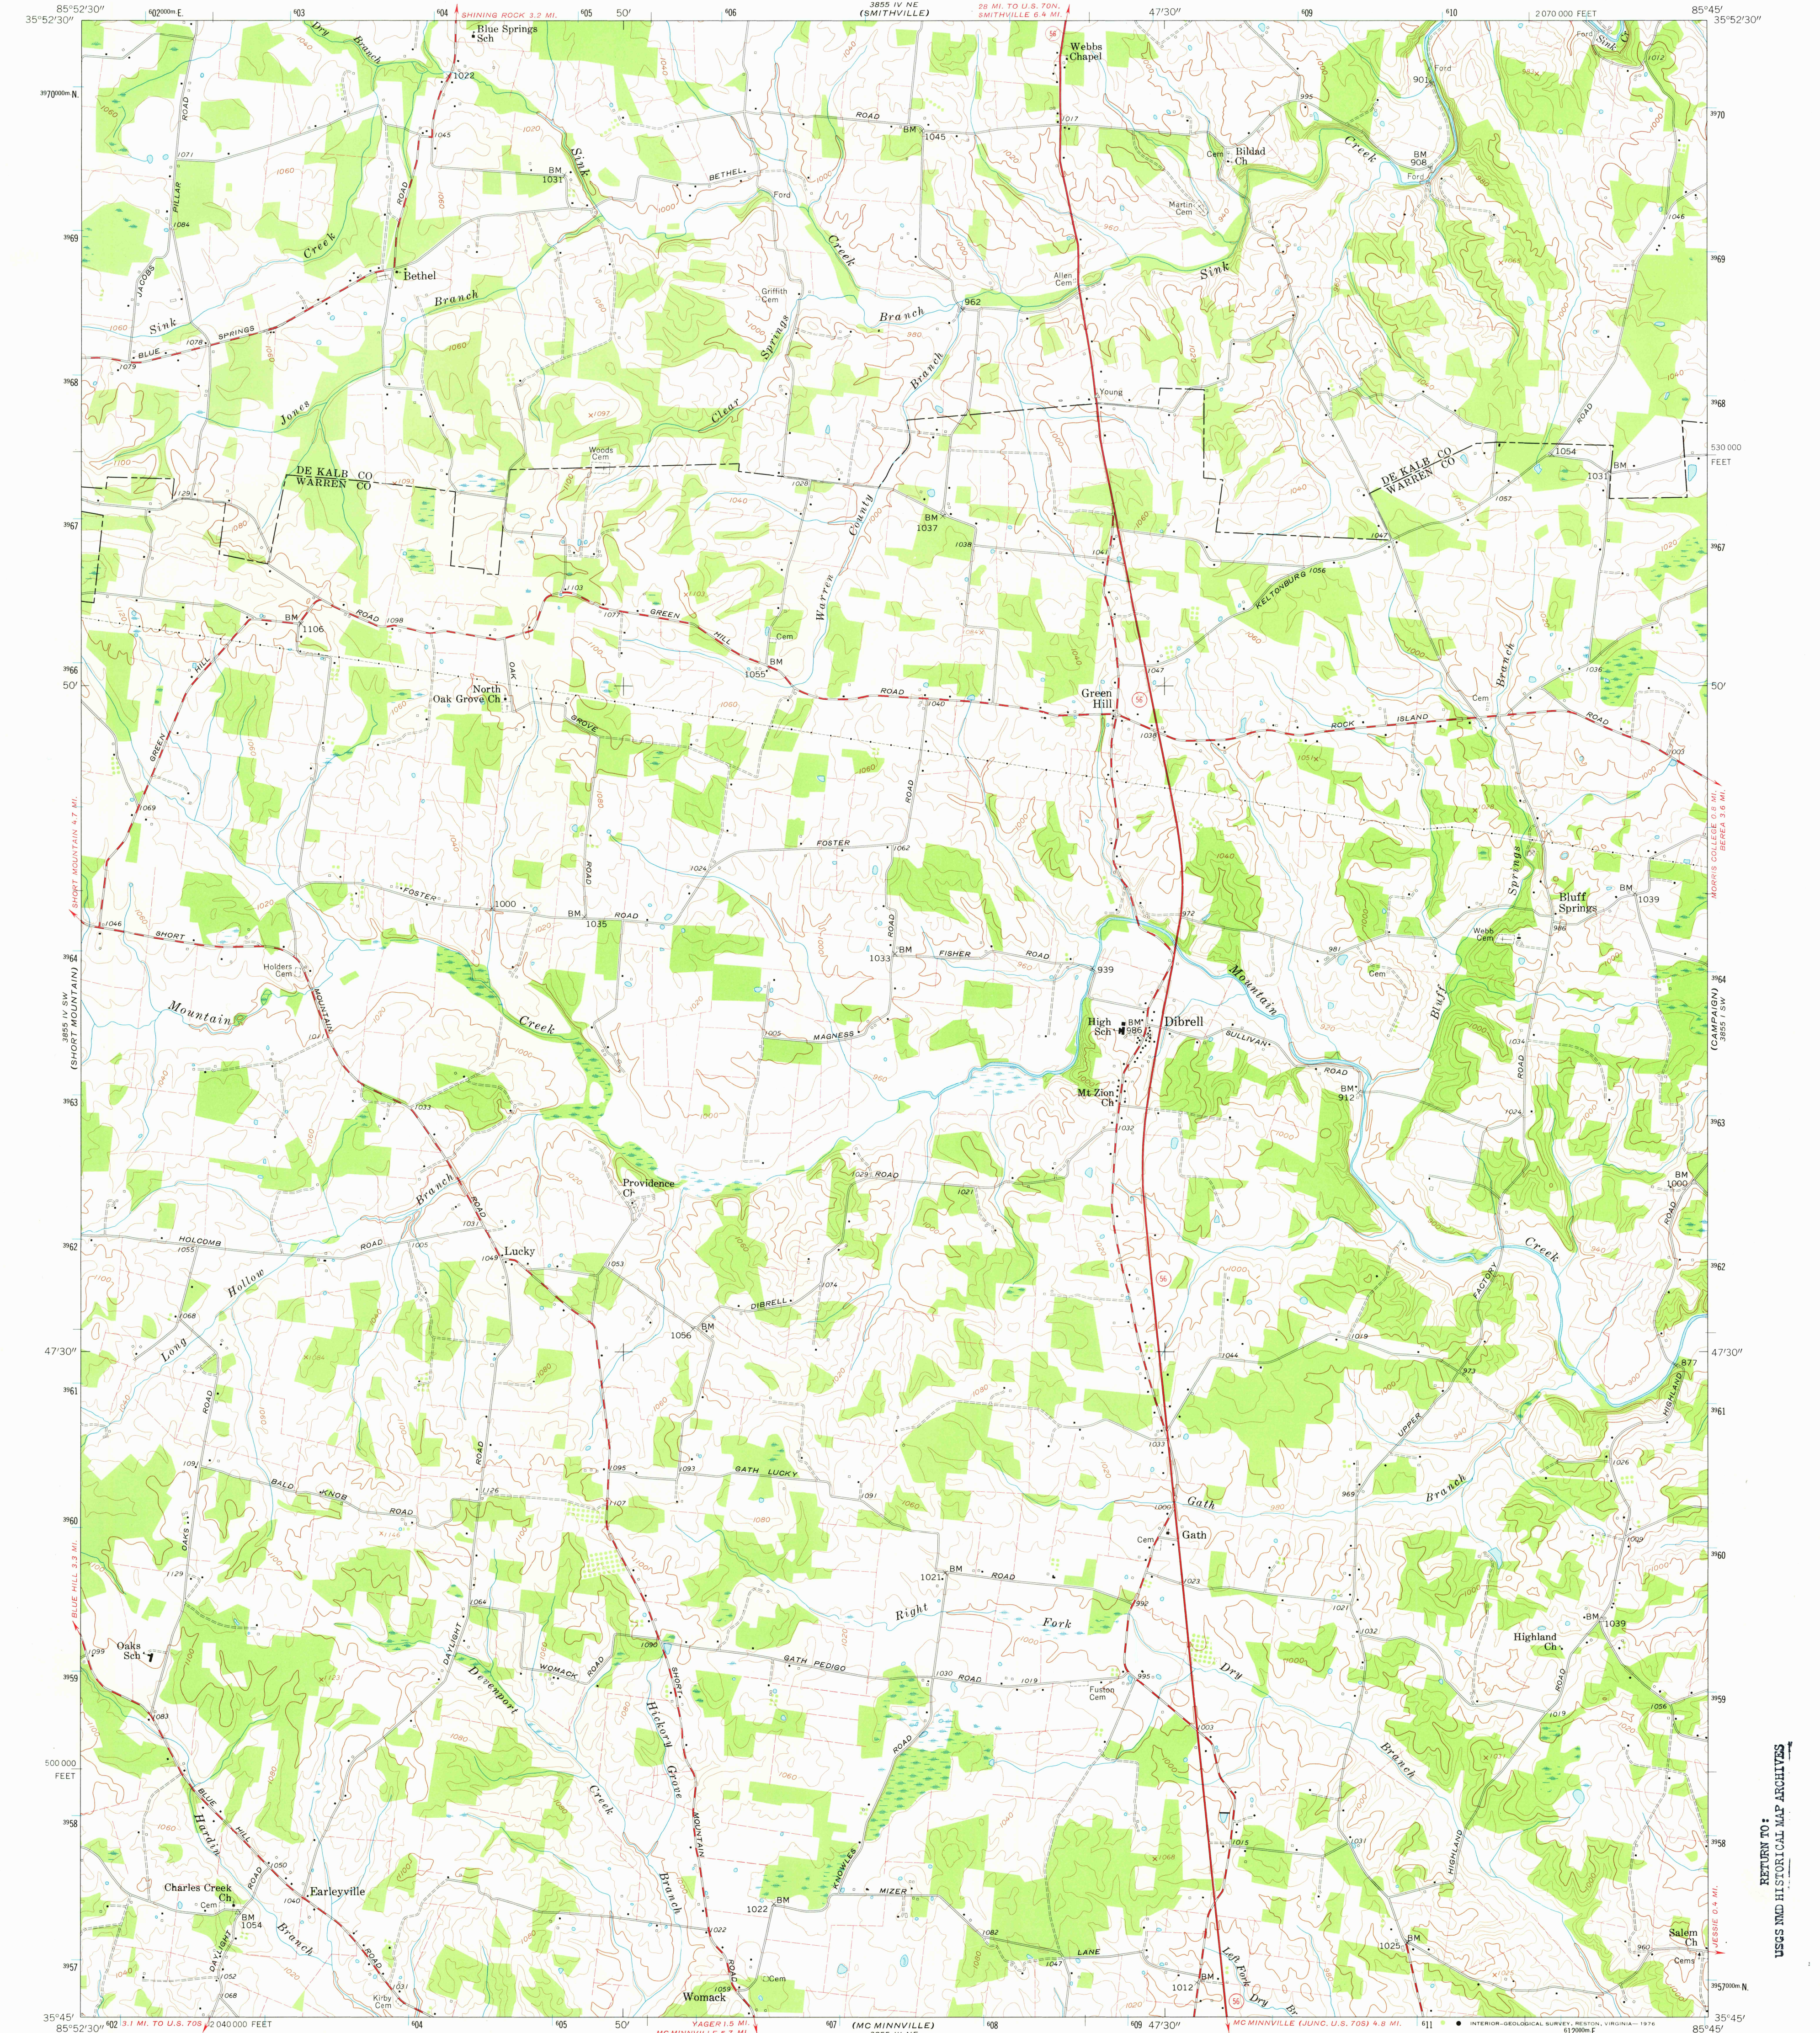

Mapped, edited, and published by the Geological Survey
Control by USGS and USC&GS

Topography from aerial photographs by photogrammetric methods
Aerial photographs taken 1954. Field check 1960

Polyconic projection. 1927 North American datum
10,000-foot grid based on Tennessee coordinate system
1000-meter Universal Transverse Mercator grid ticks,
zone 16, shown in blue

Fine red dashed lines indicate selected fence and field lines where generally visible on aerial photographs. This information is unchecked

GN
MN

0°42' 2°

12 MILS 36 MILS

UTM GRID AND 1960 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

1885 *N*/E
SCALE 1:24 000

The graphic scale bar consists of two horizontal lines. The top line is marked in feet, with major ticks every 1000 feet from 0 to 7000. The bottom line is marked in kilometers, with major ticks at 0, 1, and 2. The text '1 MIL' is at the far right of the top line, and '1 KILOMETER' is at the far right of the bottom line.

0 1000 0 1000 2000 3000 4000 5000 6000 7000 FEET

0 1 2 KILOMETER

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
AND TENNESSEE DIVISION OF GEOLOGY, NASHVILLE, TENN. 37219
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION

Heavy-duty Light-duty

Medium-duty Unimproved dirt

○ State Route

USGS
Historical File
Topographic Division

DIBRELL, TENN.
N3545—W8545/7.5

1960

AMS 3855 IV SE—SERIES V841

SEP 28 1976