




Maped and edited by Tennessee Valley Authority
Published by the Geological Survey
Basic control by USC&GS, USGS, and TVA
Topography by USGS and TVA by multiplex methods from aerial
photographs taken 1947 and 1952. Field examination by TVA, 1950
Polyconic projection, 1927 North American datum
10,000-foot grid based on Tennessee rectangular
coordinate system

TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN
DECLINATION 1950

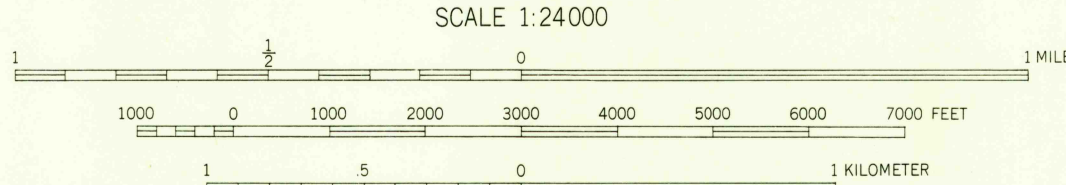

CONTOUR INTERVAL 20 FEET
DASHED LINES REPRESENT HALF-INTERVAL CONTOURS
DATUM IS MEAN SEA LEVEL

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS

FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
TENNESSEE DIVISION OF GEOLOGY, NASHVILLE, TENN.
U. S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA OR KNOXVILLE, TENN.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS
HISTORICAL FILE
TOPOGRAPHIC DIVISION

U. S. G. S.
FILE COPY
Inspection and Editing.

ROAD CLASSIFICATION (TVA 31-SE)
In developed areas, only through roads are classified
HARD-SURFACE ALL WEATHER ROADS DRY WEATHER ROADS
Heavy-duty 4 LANE Improved dirt
Medium-duty 4 LANE Unimproved dirt
Loose-surface, graded, or narrow hard-surface
U. S. Route State Route

LOBELVILLE, TENN.
N3545-W8745/7.5

1950
MINOR CORRECTIONS MADE 1952

JAN 22 1953

2235