




Mapped and edited by Tennessee Valley Authority
Published by the Geological Survey
Control by US&GS, USGS, and TVA
Topography by USGS and TVA by multiplex and planetable
methods. Aerial photographs taken 1946 and 1952
Field examination by TVA, 1949
Polyconic projection, 1927 North American datum
10,000-foot grid based on Tennessee rectangular
coordinate system
—378— Indicates Kentucky Lake Easement Boundary

TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN
DECLINATION 1949

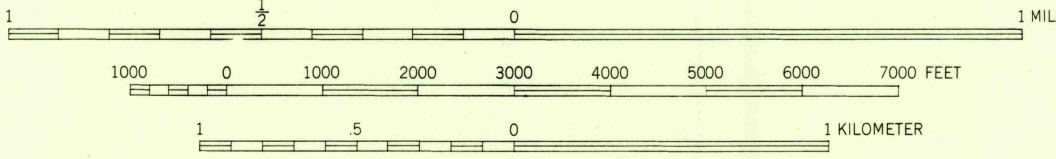

CONTOUR INTERVAL 20 FEET
DASHED LINES REPRESENT HALF-INTERVAL CONTOURS
DATUM IS MEAN SEA LEVEL

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
TENNESSEE DIVISION OF GEOLOGY, NASHVILLE, TENN.
U. S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA OR KNOXVILLE, TENN.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS
HISTORICAL FILE
TOPOGRAPHIC DIVISION

U. S. G. S.
FILE COPY
IMPRESSION AND PUBLISHING

ROAD CLASSIFICATION
HARD-SURFACE ALL WEATHER ROADS
Heavy-duty ——— 2 LANE 16 LANE
Medium-duty ——— 2 LANE 16 LANE
Loose-surface, graded, or narrow hard-surface ———
① U. S. Route ② State Route
DRY WEATHER ROADS
Improved dirt ———
Unimproved dirt ———

POPE, TENN.
N3530-W8752.5/7.5

1949
MINOR CORRECTIONS MADE 1952

NOV 26 1952
2240