


U.S.G.S.
FILE COPY
Inspection and Editing

U.S.G.S.
FILE COPY
Inspection and Editing

U.S.G.S.
FILE COPY
Inspection and Editing

U.S.G.S.
FILE COPY
Inspection and Editing

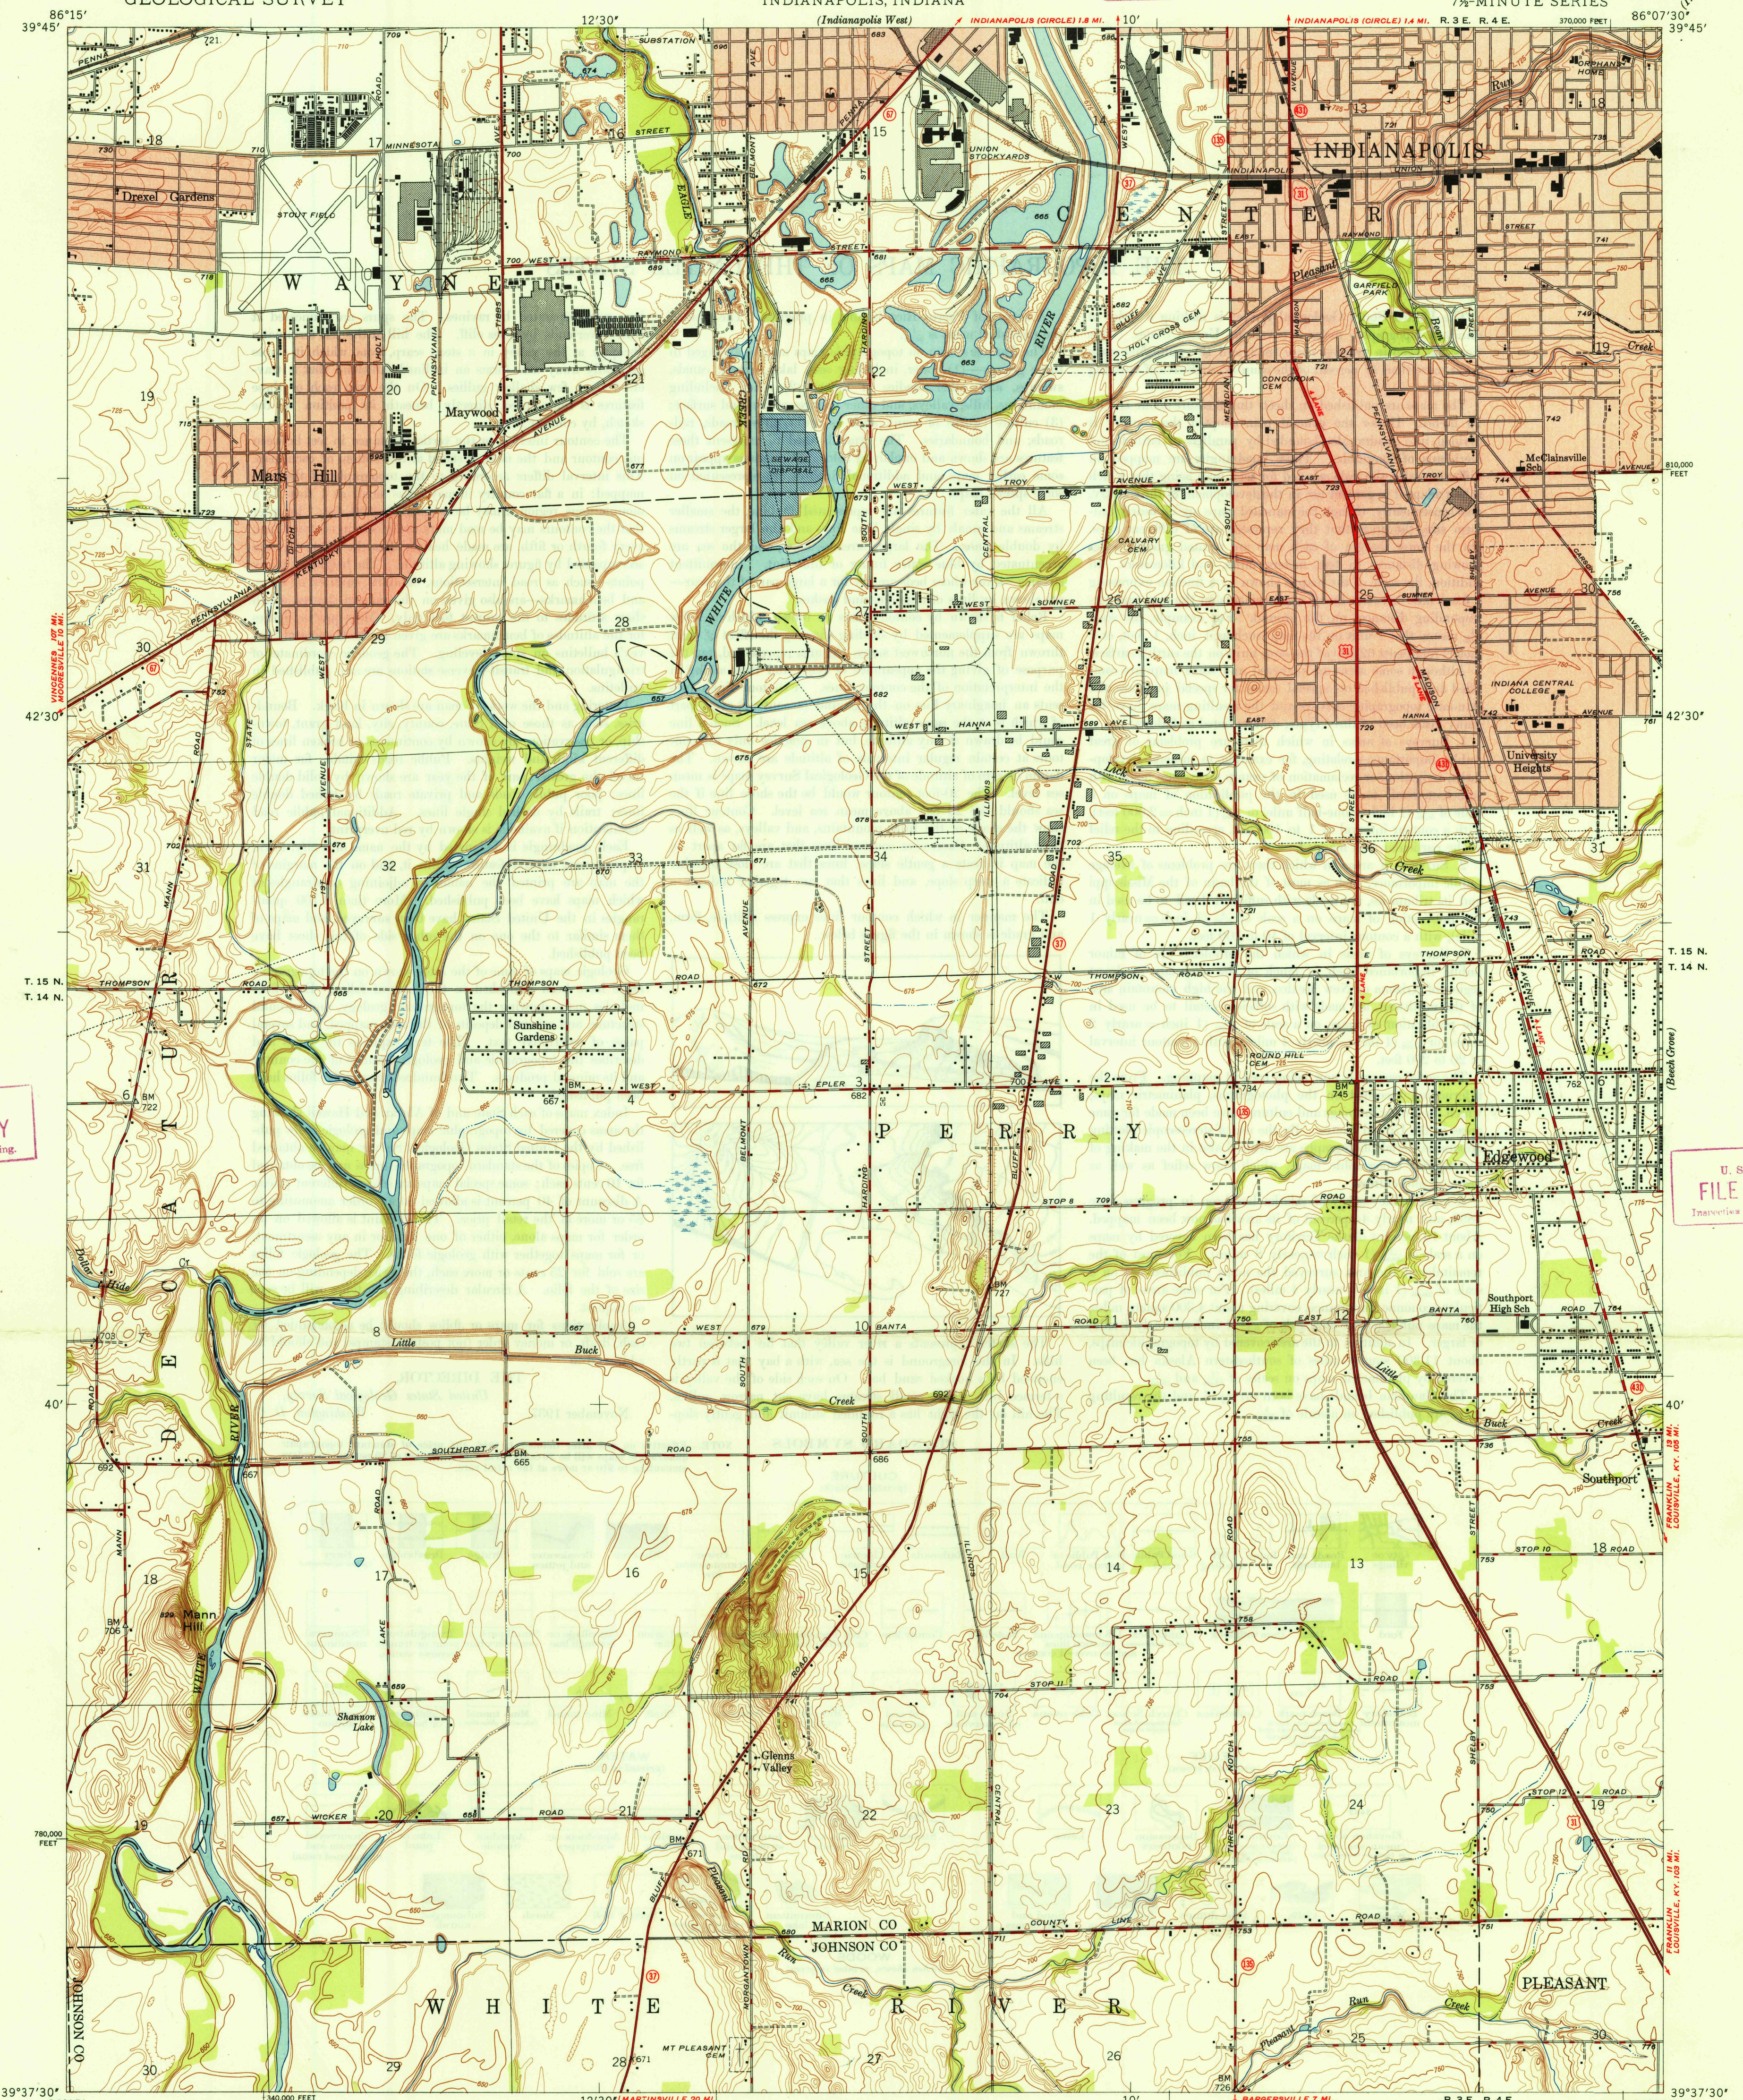

Mapped by the Geological Survey 1946
Polyconic projection, 1927 North American Datum
10,000 foot grid based on Indiana (East) Coordinate System
Red tint indicates areas in which only landmark buildings are shown
Section lines omitted in red tint area
Only section numbers shown

SCALE 1:24,000
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 5 10 15 20 25 30 35 40 45 50 KILOMETER
Contour interval 5 feet
Datum is mean sea level

USGS
Historical File
Topographic Division

U.S.G.S.
FILE COPY
Inspection and Editing

ROAD CLASSIFICATION
HARD-SURFACE ALL WEATHER ROADS DRY WEATHER ROADS
Heavy-duty 3 LANE 4 LANE Improved dirt
Medium-duty 3 LANE 4 LANE Unimproved dirt
Loose-surface or narrow hard-surface

MAYWOOD, IND.
EDITION OF 1948
N3937.5-W8607.5/7.5

JUN 22 1948