

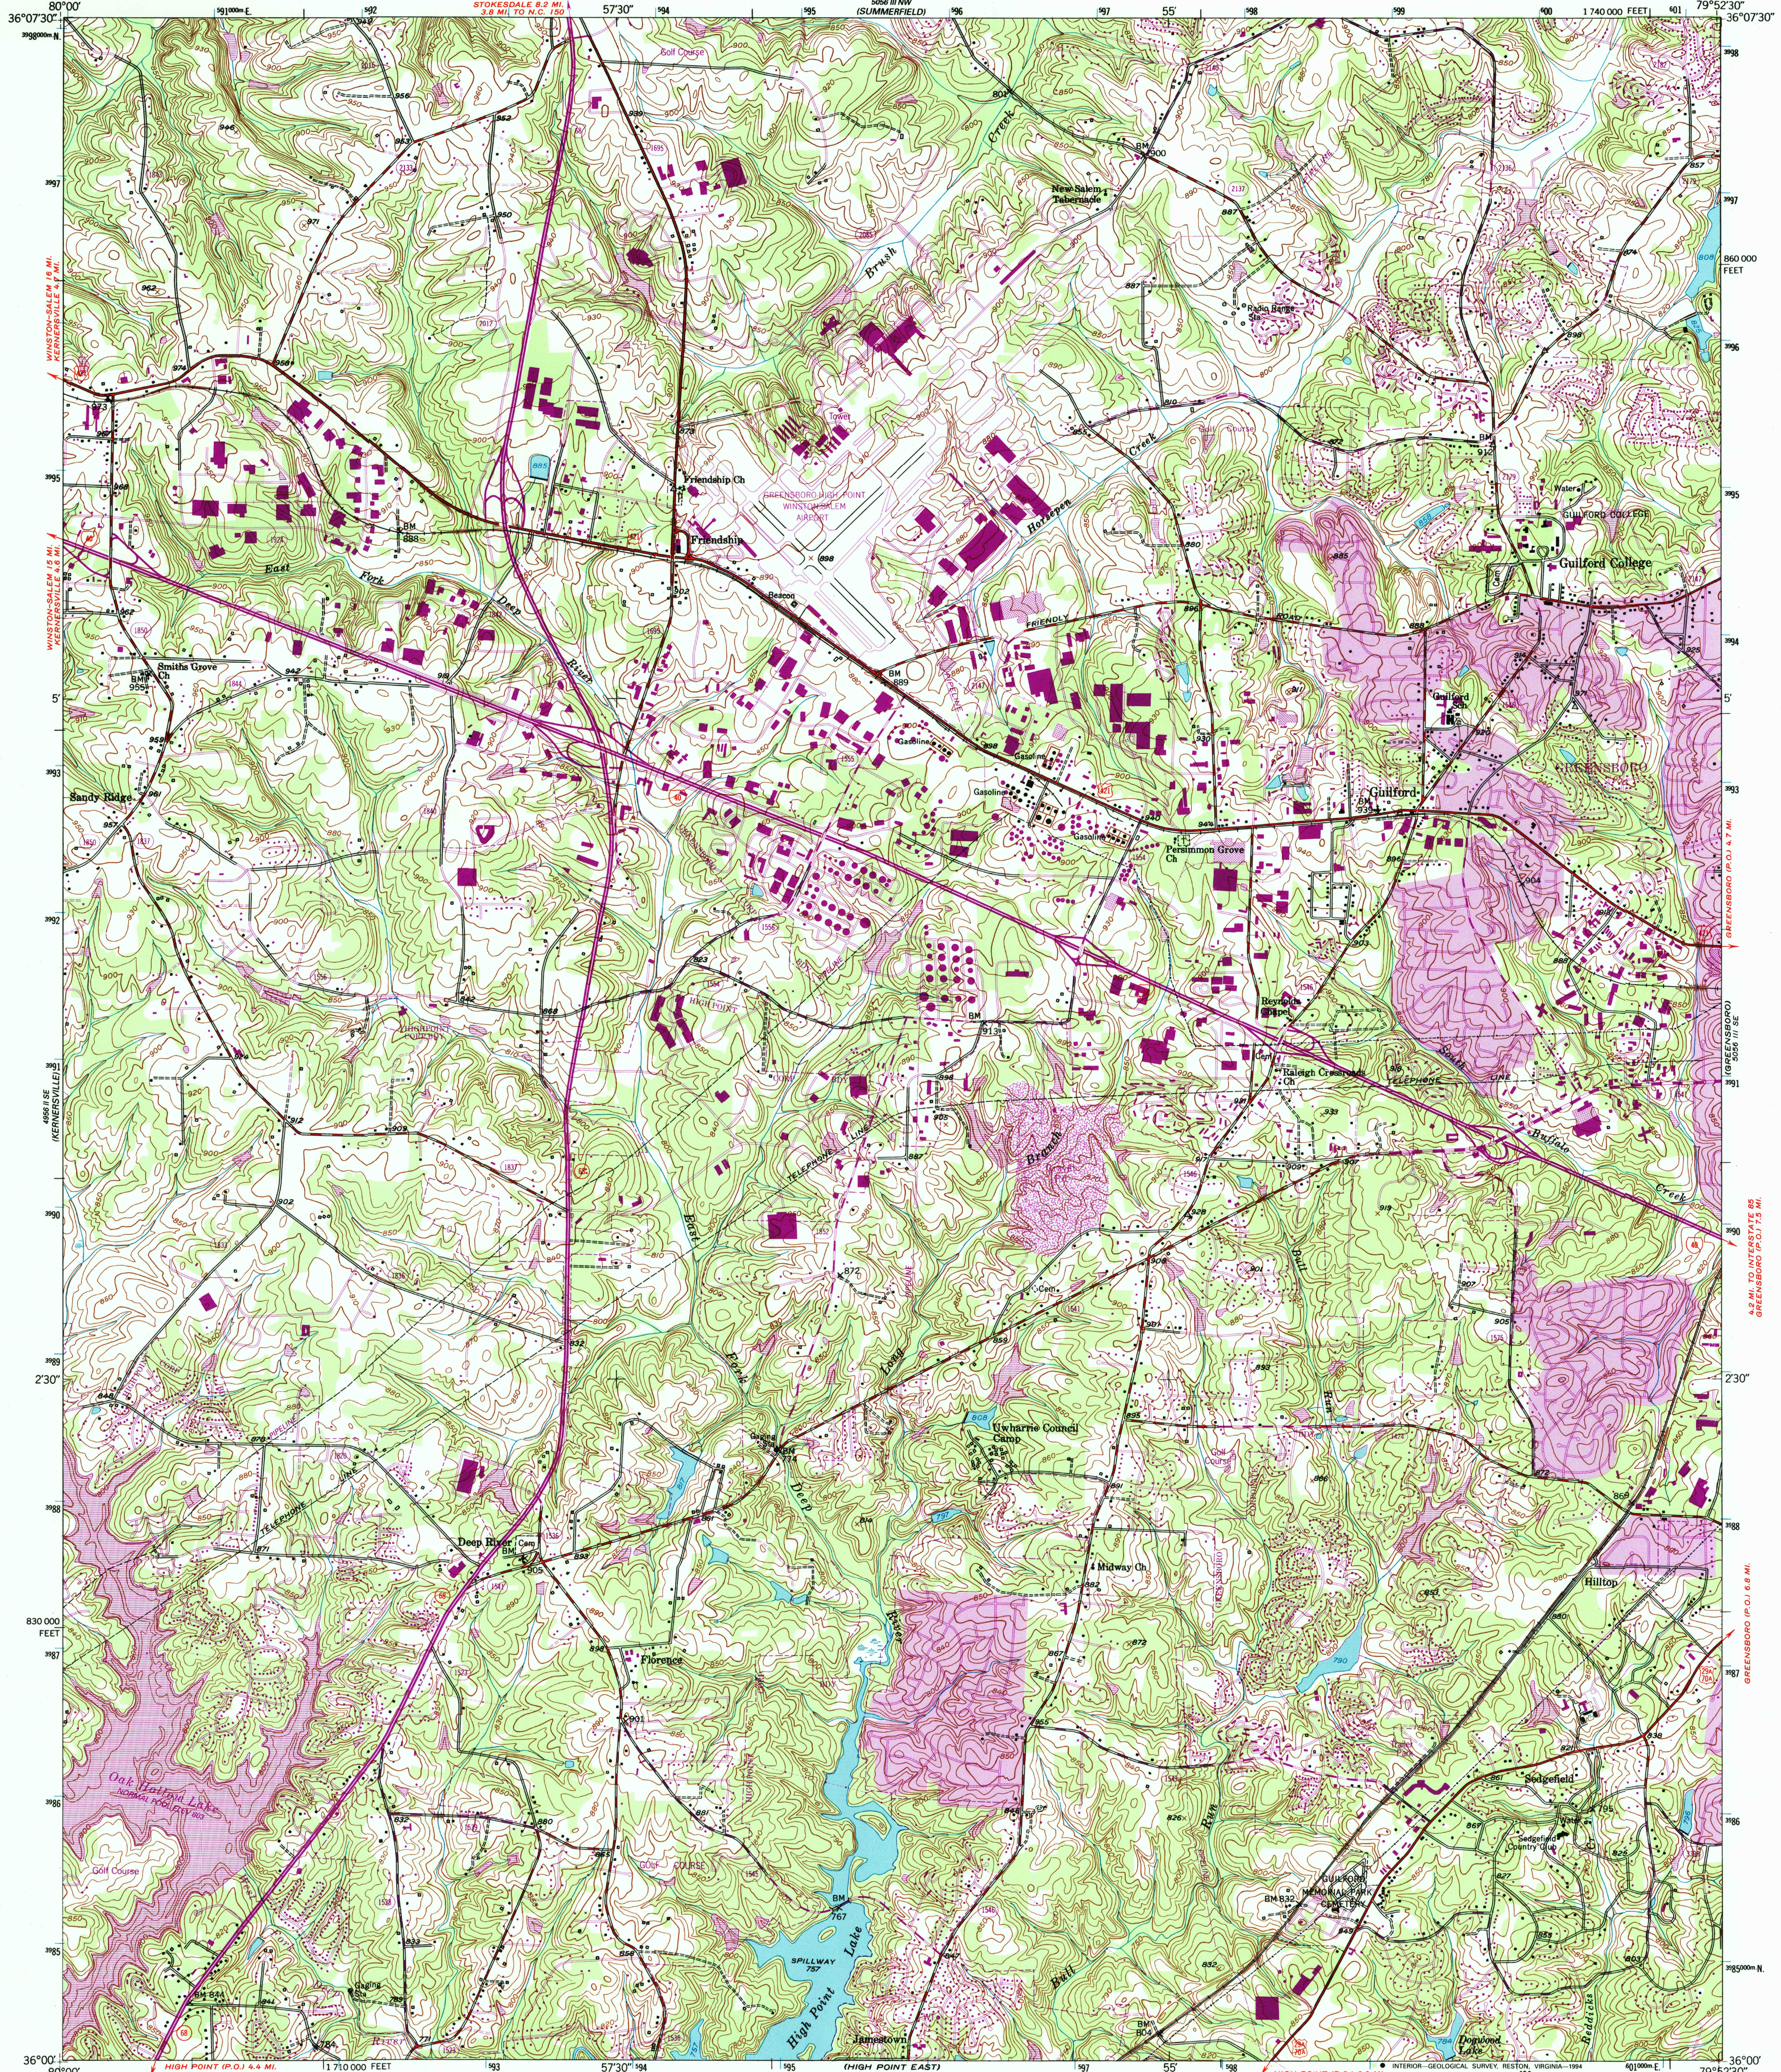


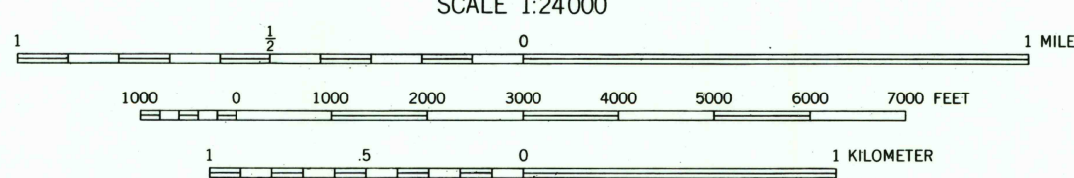


Produced by the United States Geological Survey
Control by USGS, NOS/NOAA, and North Carolina Geodetic Survey
Planimetry by photogrammetric methods from aerial photographs
taken 1948. Topography by planimetric methods 1951
North American Datum of 1927 (NAD 27). Projection and
10 000-foot ticks: North Carolina coordinate system,
(Lambert conformal conic)
Blue 1000-meter Universal Transverse Mercator ticks, zone 17
North American Datum of 1983 (NAD 83) is shown by dashed
corner ticks. The values of the shift between NAD 27 and NAD 83
for 7.5-minute intersections are obtainable from National Geodetic
Survey NADCON software



CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

COMPLIES WITH U.S. GEOLOGICAL SURVEY STANDARDS FOR SPATIAL DATA ACQUISITION
FOR SALE BY U.S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 20192
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

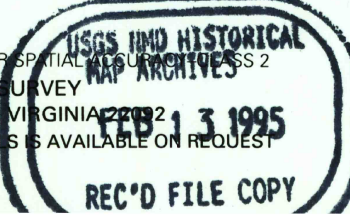

ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
Interstate Route U.S. Route State Route

Revisions shown in purple compiled in cooperation with
State of North Carolina agencies from aerial photographs
taken 1991 and other sources. This information not
field checked. Map edited 1994
Information shown in purple may not meet USGS content
standards and may conflict with previously mapped contours
Purple tint indicates extension of urban areas

GUILFORD, N. C.
36079-A8-TF-024
1951
REVISED 1994
DMA 5056 III SW-SERIES V842