



CONVERSION
SCALES

Feet Meters

15000 4500

14000 4000

13000 3500

12000 3000

11000 2500

10000 2000

9000 1500

8000 1000

7000 500

6000 0

5000 0

4000 0

3000 0

2000 0

1000 0

0 0

Feet Meters

1 3048

2 6096

3 9144

4 12192

5 15240

6 18288

7 21336

8 24384

9 27432

10 30480

To convert feet to meters

multiply by 3048

To convert meters to feet

multiply by 3.2808



Produced by the United States Geological Survey

Control by USGS and NOS/NOAA

Orthophotomap prepared from aerial photograph taken
March 2, 1977. Topography by photogrammetric methods
from aerial photographs taken 1975 and planetable
surveys 1980. Field checked 1977. Map edited 1982

Projection and 10,000-foot grid ticks: North Carolina coordinate
system (Lambert conformal conic)
1000-meter Universal Transverse Mercator grid, zone 18
1927 North American Datum

To place on the predicted North American Datum 1983
move the projection lines 11 meters south and
30 meters west as shown by dashed corner ticks

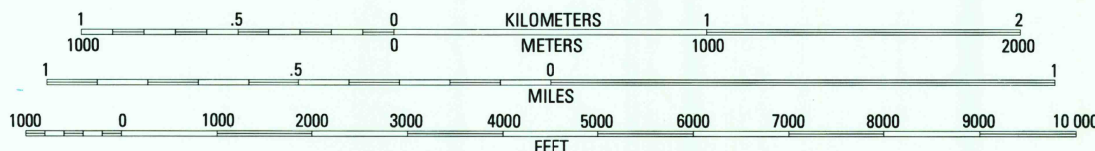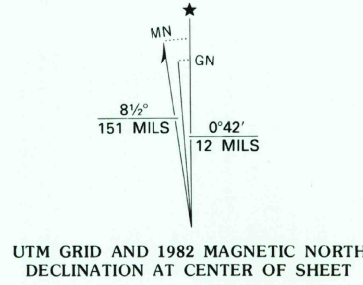

CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
DASHED SUPPLEMENTARY CONTOURS ARE APPROXIMATE
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



CONTOURS AND ELEVATIONS
IN METERS

ROAD CLASSIFICATION

Primary highway, hard surface

Secondary highway, hard surface

Trails

Light-duty road, hard or improved surface

Unimproved road

Interstate Route

U. S. Route

State Route

LAMBS CORNER, N. C.

NW 4 ELIZABETH CITY 15' QUADRANGLE

N3622.5 - W7607.5/7.5

1982

DMA 5756 1 NW - SERIES V8420

APR 09 1984
RECEIVED
USGS AND HISTORICAL MAP ARCHIVES