


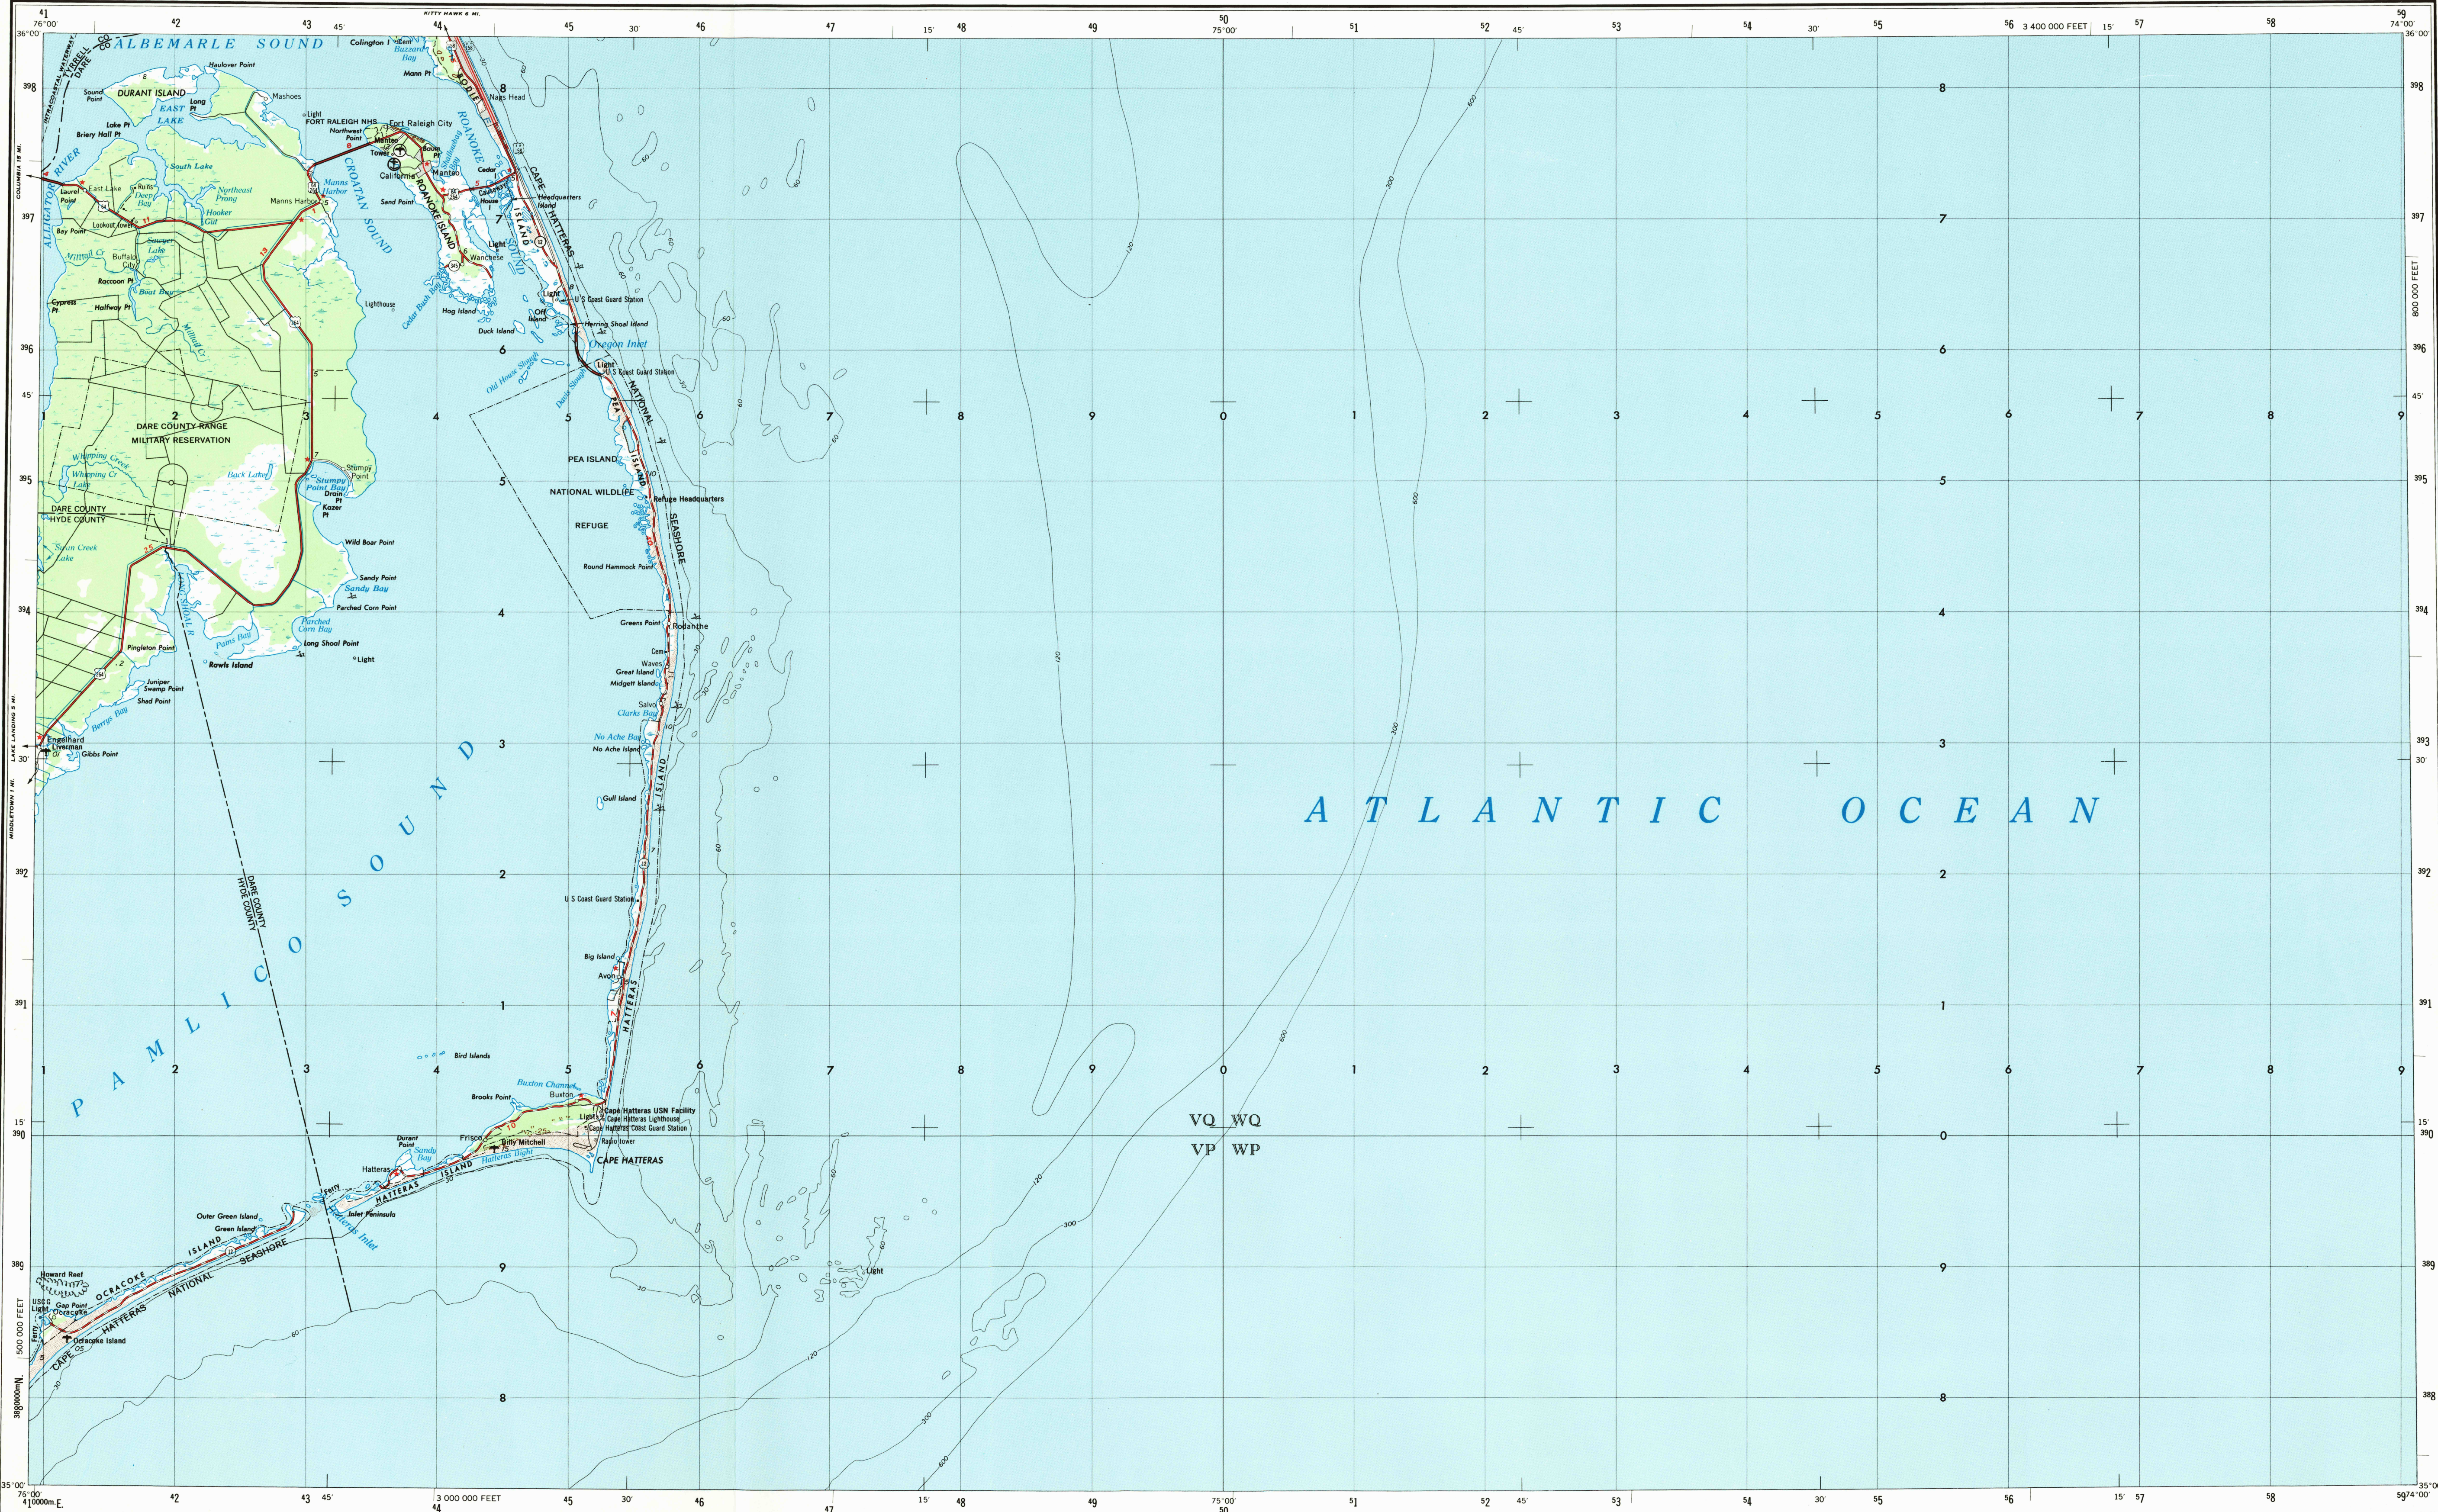





V501, EDITION 4

Prepared by the U.S. Army Topographic Command (KCSX), Washington, D.C. Compiled in 1957 from United States quadrangles, 1:24,000 and 1:25,000, 1946-54; USGS charts, 1937-55. Planimetry revised in part from aerial photographs taken 1956. Map field checked 1957. Revised in 1973 by the U.S. Geological Survey from aerial photographs taken 1972.

Selected hydrographic data compiled from USCGS charts. This information is not intended for navigational purposes.

100,000-foot grid based on North Carolina coordinate system.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

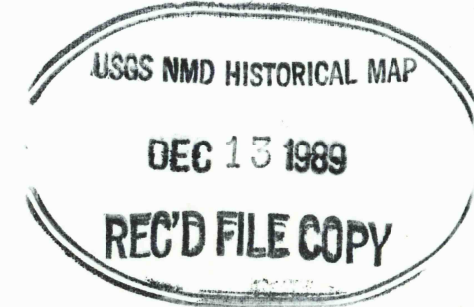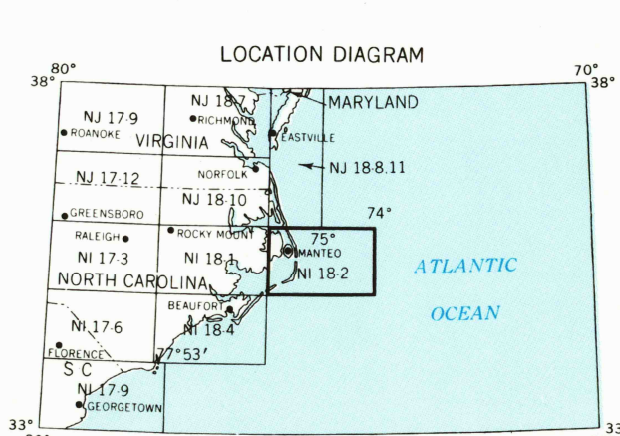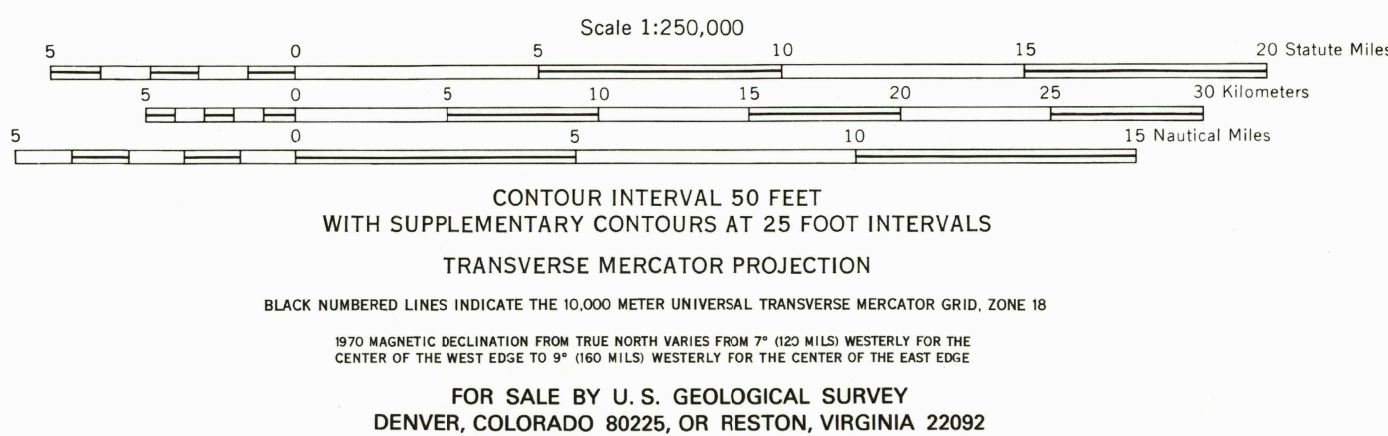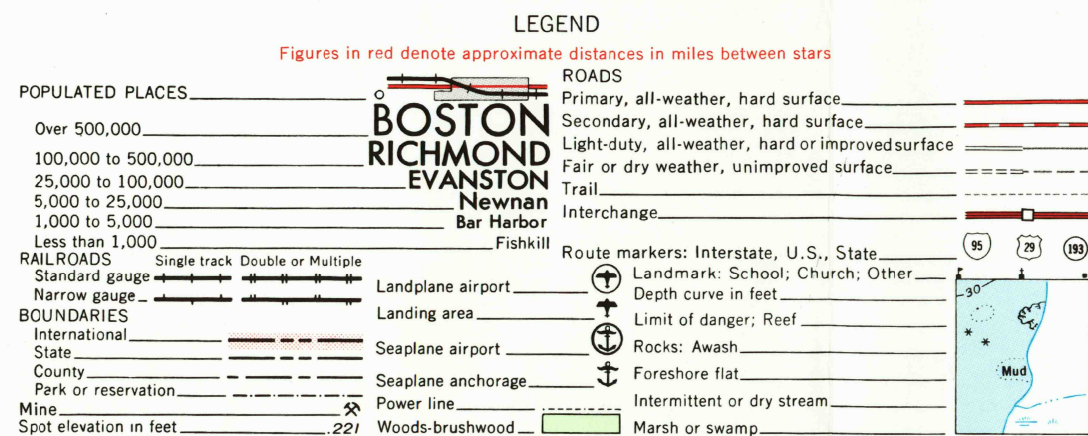

GRID ZONE DESIGNATION: 18S		TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS	
100,000 M. SQUARE IDENTIFICATION		SAMPLE POINT: BUXTON	
VQ VP WQ WP	1. Read letters identifying 100,000 meter square in which the point lies.		VQ 0 2 18SV05002
	2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself. Estimate tenths from grid line to point.		
	3. Locate first HORIZONTAL grid line below point and read LARGE figure labeling the line either in the left or right margin, or on the line itself. Estimate tenths from grid line to point.		
	4. If reporting beyond 10" in any direction, prefix Grid Zone Designation, as:		
IGNORE THE SMALLER FIGURES of any grid number; these are for finding only the full coordinates. ONLY the LARGER figure of the grid number; example: 380000			