




Mapped by the U.S. Coast & Geodetic Survey
Edited and published by the Geological Survey
Control by USC&GS
Shoreline and drainage compiled from aerial photographs taken 1948.
Topography by plane-table methods 1949. Field check 1951
Hydrography from surveys dated 1874 and supplementary information
Polyconic projection. 1927 North American datum
10,000-foot grid based on North Carolina coordinate system

5' 30"
TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN
DECLINATION, 1951

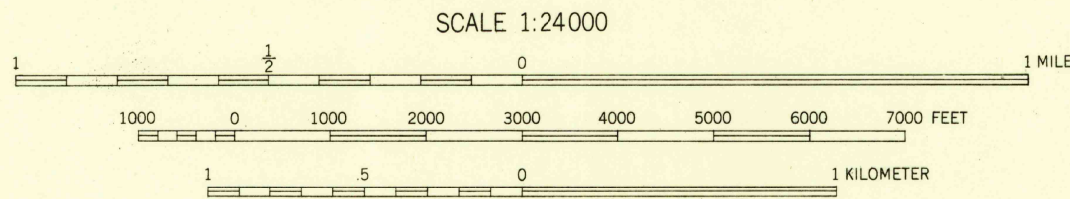

HIGHEST GROUND ELEVATION 5 FEET
DATUM IS MEAN SEA LEVEL
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS MEAN LOW WATER
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER
THE AVERAGE RANGE OF TIDE IS APPROXIMATELY 1 FOOT
THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USCS
Historical File
Topographic Division

ROAD CLASSIFICATION
Heavy-duty 4 LANE 16 LANE Light-duty
Medium-duty 4 LANE 16 LANE Unimproved dirt =====
U. S. Route State Route

U. S. G. S.
FILE COPY
Inspection and Editing.

BLUFF POINT, N. C.
N3515-W7607.5/7.5
1951