




First Edition 1943
Prepared under the direction of the Chief of Engineers, U. S. Army, 1942-43.
Control by U.S.C. & G.S., U.S.G.S., U.S.E.D., S.C.S., Baker Engineering Co.,
and Aero Service Corp.
Topography by Aero Service Corp., (Brock Photogrammetric Method) Phila., Pa.
Polyconic Projection, North American Datum 1927.

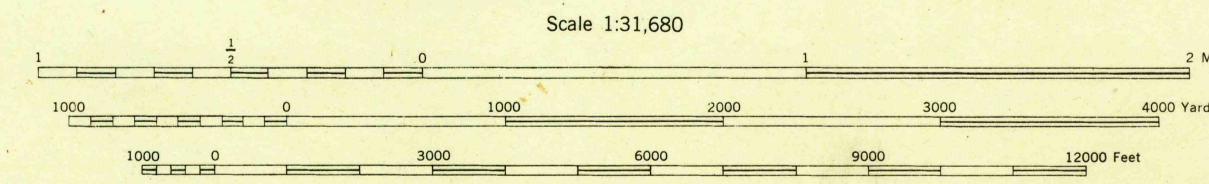

CONTOUR INTERVAL 20 FEET
DATUM IS MEAN SEA LEVEL
ONE THOUSAND YARD GRID COMPUTED FROM GRID SYSTEM FOR PROGRESSIVE MAPS
IN THE U.S. ZONE A U.S.G.S. SPECIAL PUBLICATION NO. 59
THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED
THE STATE GRID IS INDICATED AT 5,000 FOOT INTERVALS
NOTE: OFFICERS USING THIS MAP WILL MARK HEREON CORRECTIONS AND ADDITIONS WHICH COME
TO THEIR ATTENTION AND MAIL DIRECT TO THE CHIEF OF ENGINEERS, WASHINGTON, D. C.

USCS
Historical File
Topographic Division

Use diagram only to obtain numerical values. To determine
magnetic north line, connect the point "M" on the
south edge of the map with the value of the angle between
GRID NORTH and MAGNETIC NORTH, as plotted on the
degree scale of the north edge of the map.

BOYERTOWN, PA
N4015-W7537.5/7.5

U.S. & A.
FILE COPY
Inspection and Release