


PENNSYLVANIA 1:62,500

WAR DEPARTMENT
CORPS OF ENGINEERS, U. S. ARMY
(LYKENS)


FIRST EDITION - AMS 1

HUMMELSTOWN QUADRANGLE
15 MINUTE SERIES

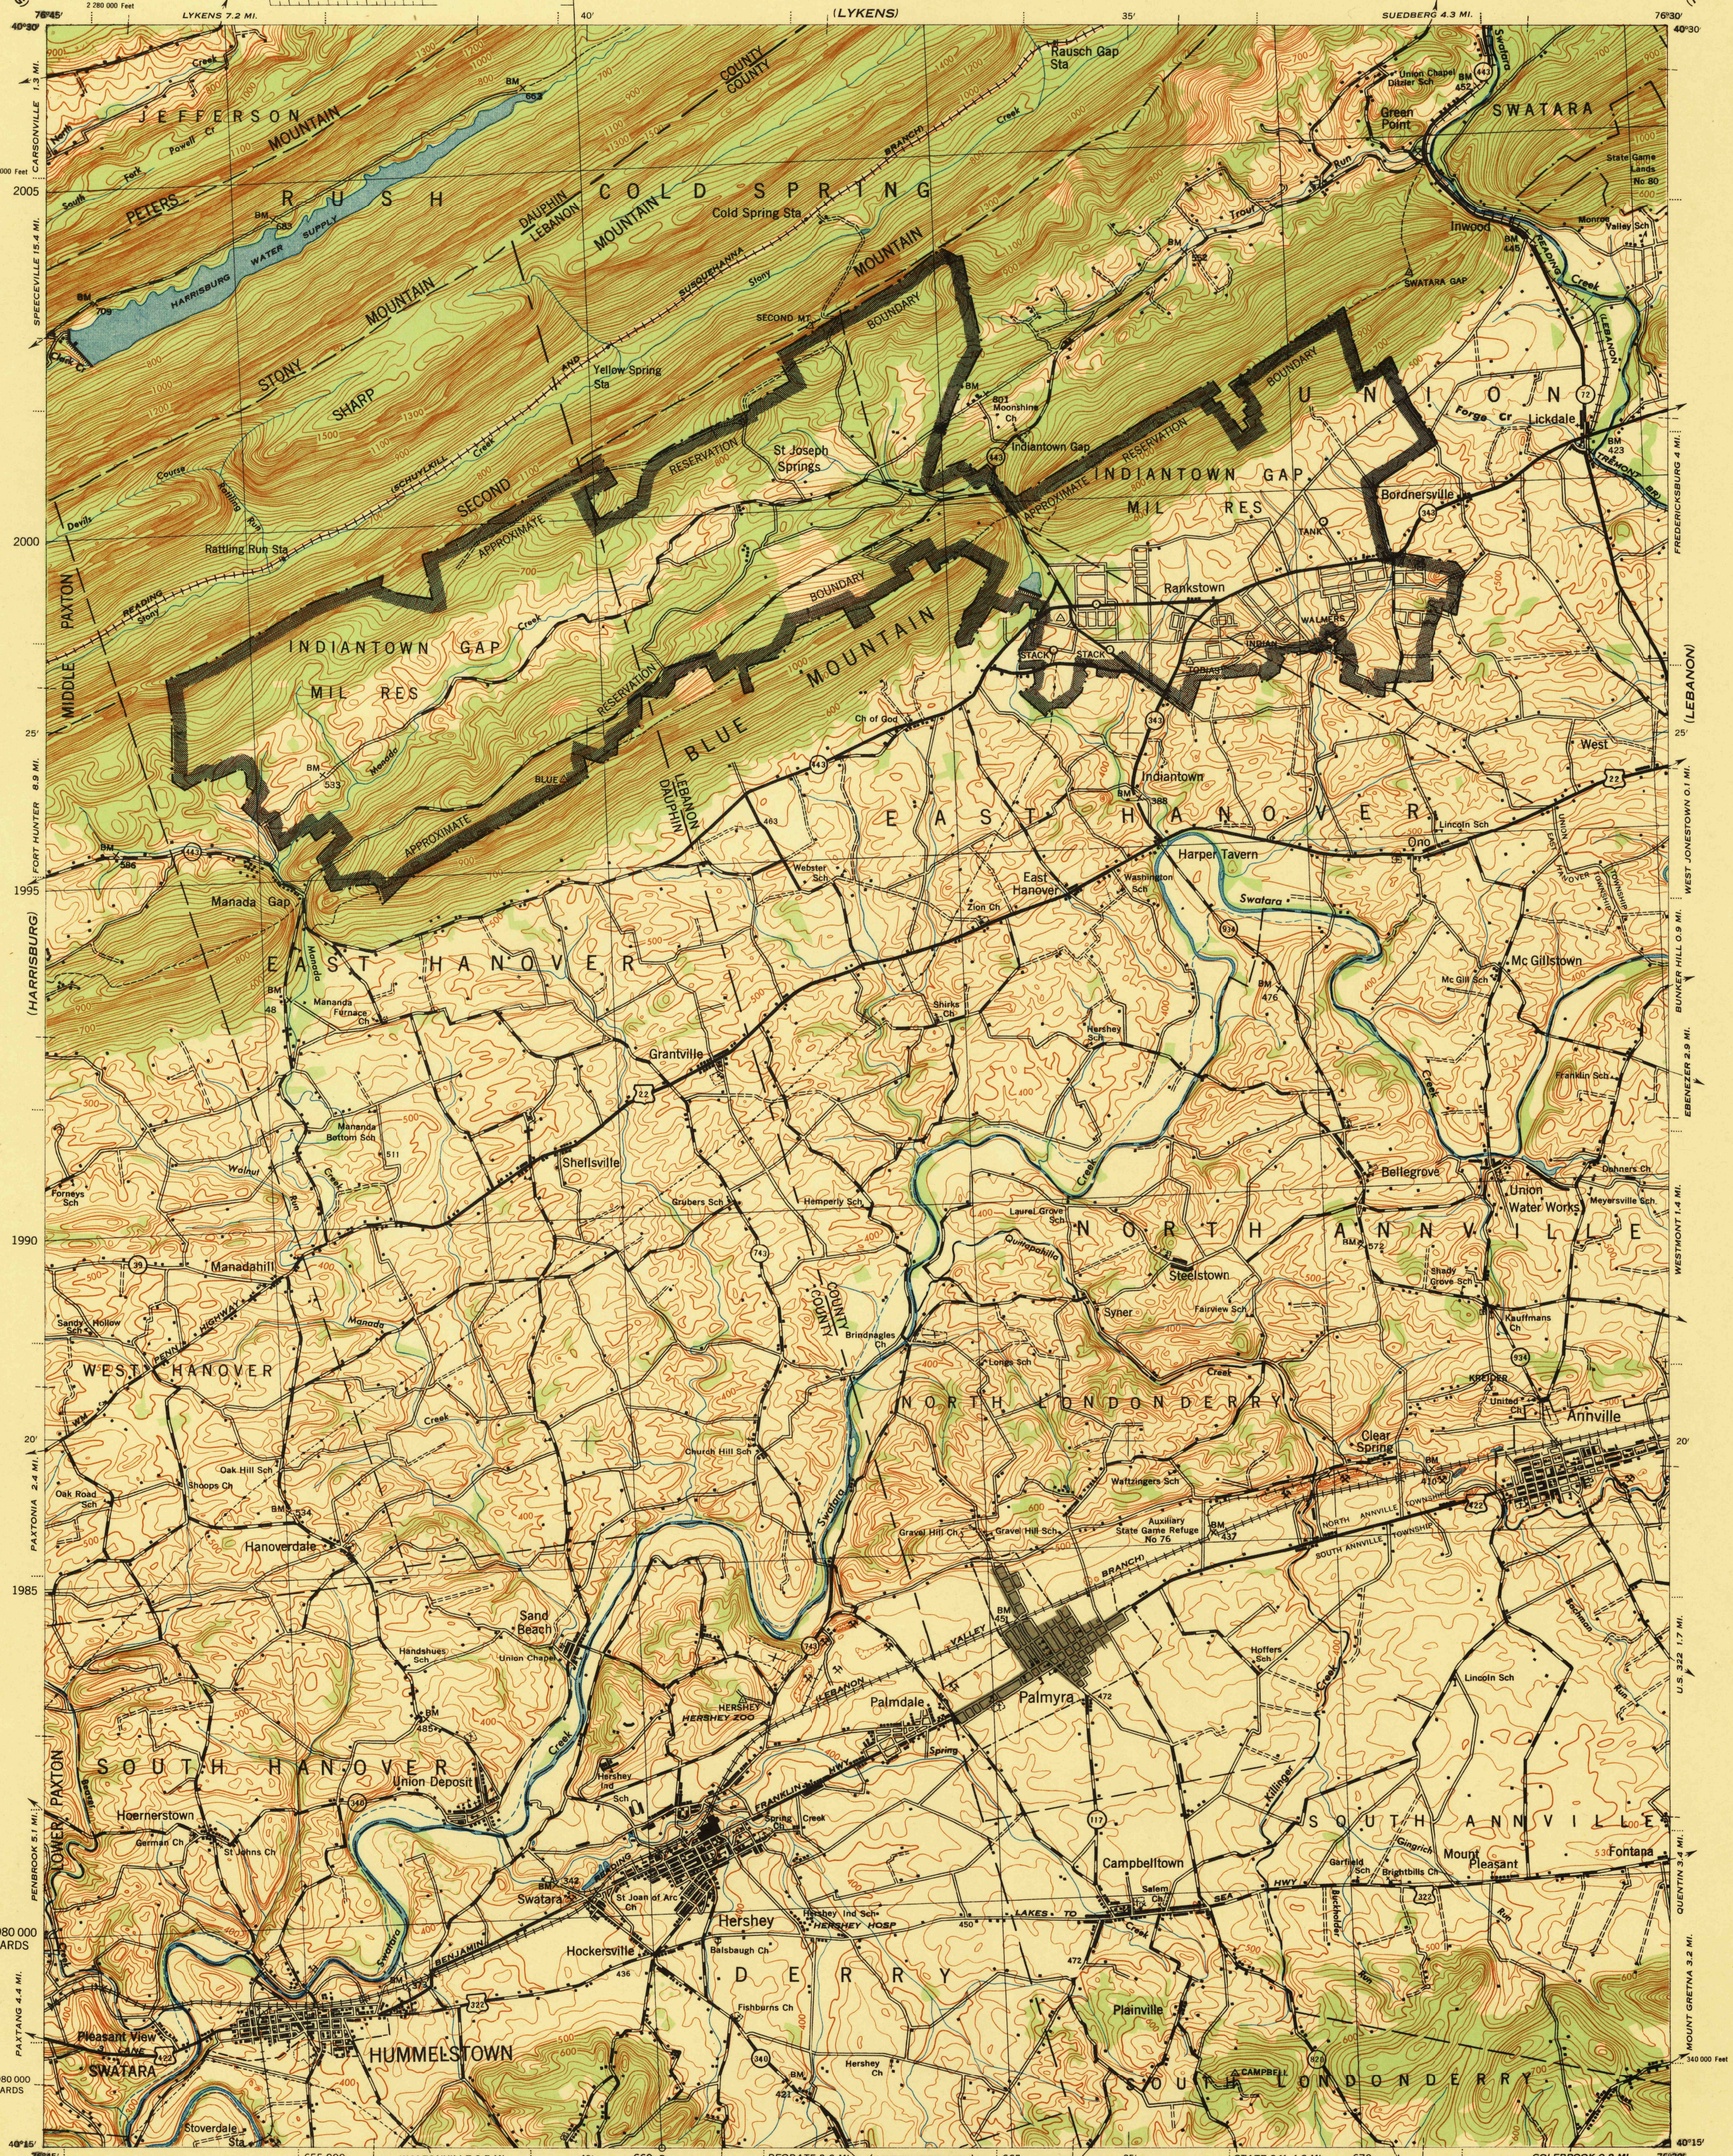

Prepared under the direction of the Chief of Engineers, U. S. Army, 1942-43.
Control by U.S.C. & G.S., U.S.G.S., U.S.E.D., S.C.S., Baker Engineering Co.,
and Aero Service Corp.
Topography by Aero Service Corp. (Brock Photogrammetric Method) Phila., Pa.
Polyconic Projection, North American Datum 1927.
Approximate reservation boundary, (October 1943.)

ROAD CLASSIFICATION 1943
Dependable hard surface, heavy duty road. U.S. Route 160
Secondary hard surface, all-weather road. U.S. Route 30
More than two lanes indicated by note along road with tick at point of change.

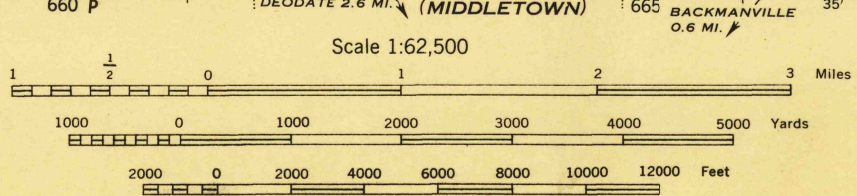

CONTOUR INTERVAL 20 FEET
DATUM IS MEAN SEA LEVEL
FIVE THOUSAND YARD GRID COMPUTED FROM "GRID SYSTEM FOR PROGRESSIVE MAPS
IN THE U. S.," U.S.C. & G.S. SPECIAL PUBLICATION NO. 59
THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED
PENNSYLVANIA STATE GRID ZONE SOUTH, IS INDICATED BY DOTTED TICKS
OUTSIDE THE NEAT LINE AT 10,000 FT. INTERVALS
THE OVERLAPPING GRID ZONE "B", IS INDICATED BY SHORT BROKEN TICKS CROSSING THE NEAT LINE
NOTE: OFFICERS USING THIS MAP WILL MARK THEIR POSITIONS AND LOCATIONS WHICH COME
TO THEIR ATTENTION AND MAIL DIRECT TO THE CHIEF OF ENGINEERS, WASHINGTON, D. C.

APPROXIMATE MEAN DECLINATION 1943
FOR CENTER OF SHEET
NO ANNUAL MAGNETIC CHANGE
Use diagram only to obtain numerical values. To determine magnetic
north line, connect the pivot point "P" on the south edge of the map
with the value of the angle between GRID NORTH and MAGNETIC
NORTH, as plotted on the degree scale at the north edge of the map.

USCS
Historical File
Topographic Division

HUMMELSTOWN, PENNA.
N4015-W7630/15

FILE COPY
Inspection and Editing