


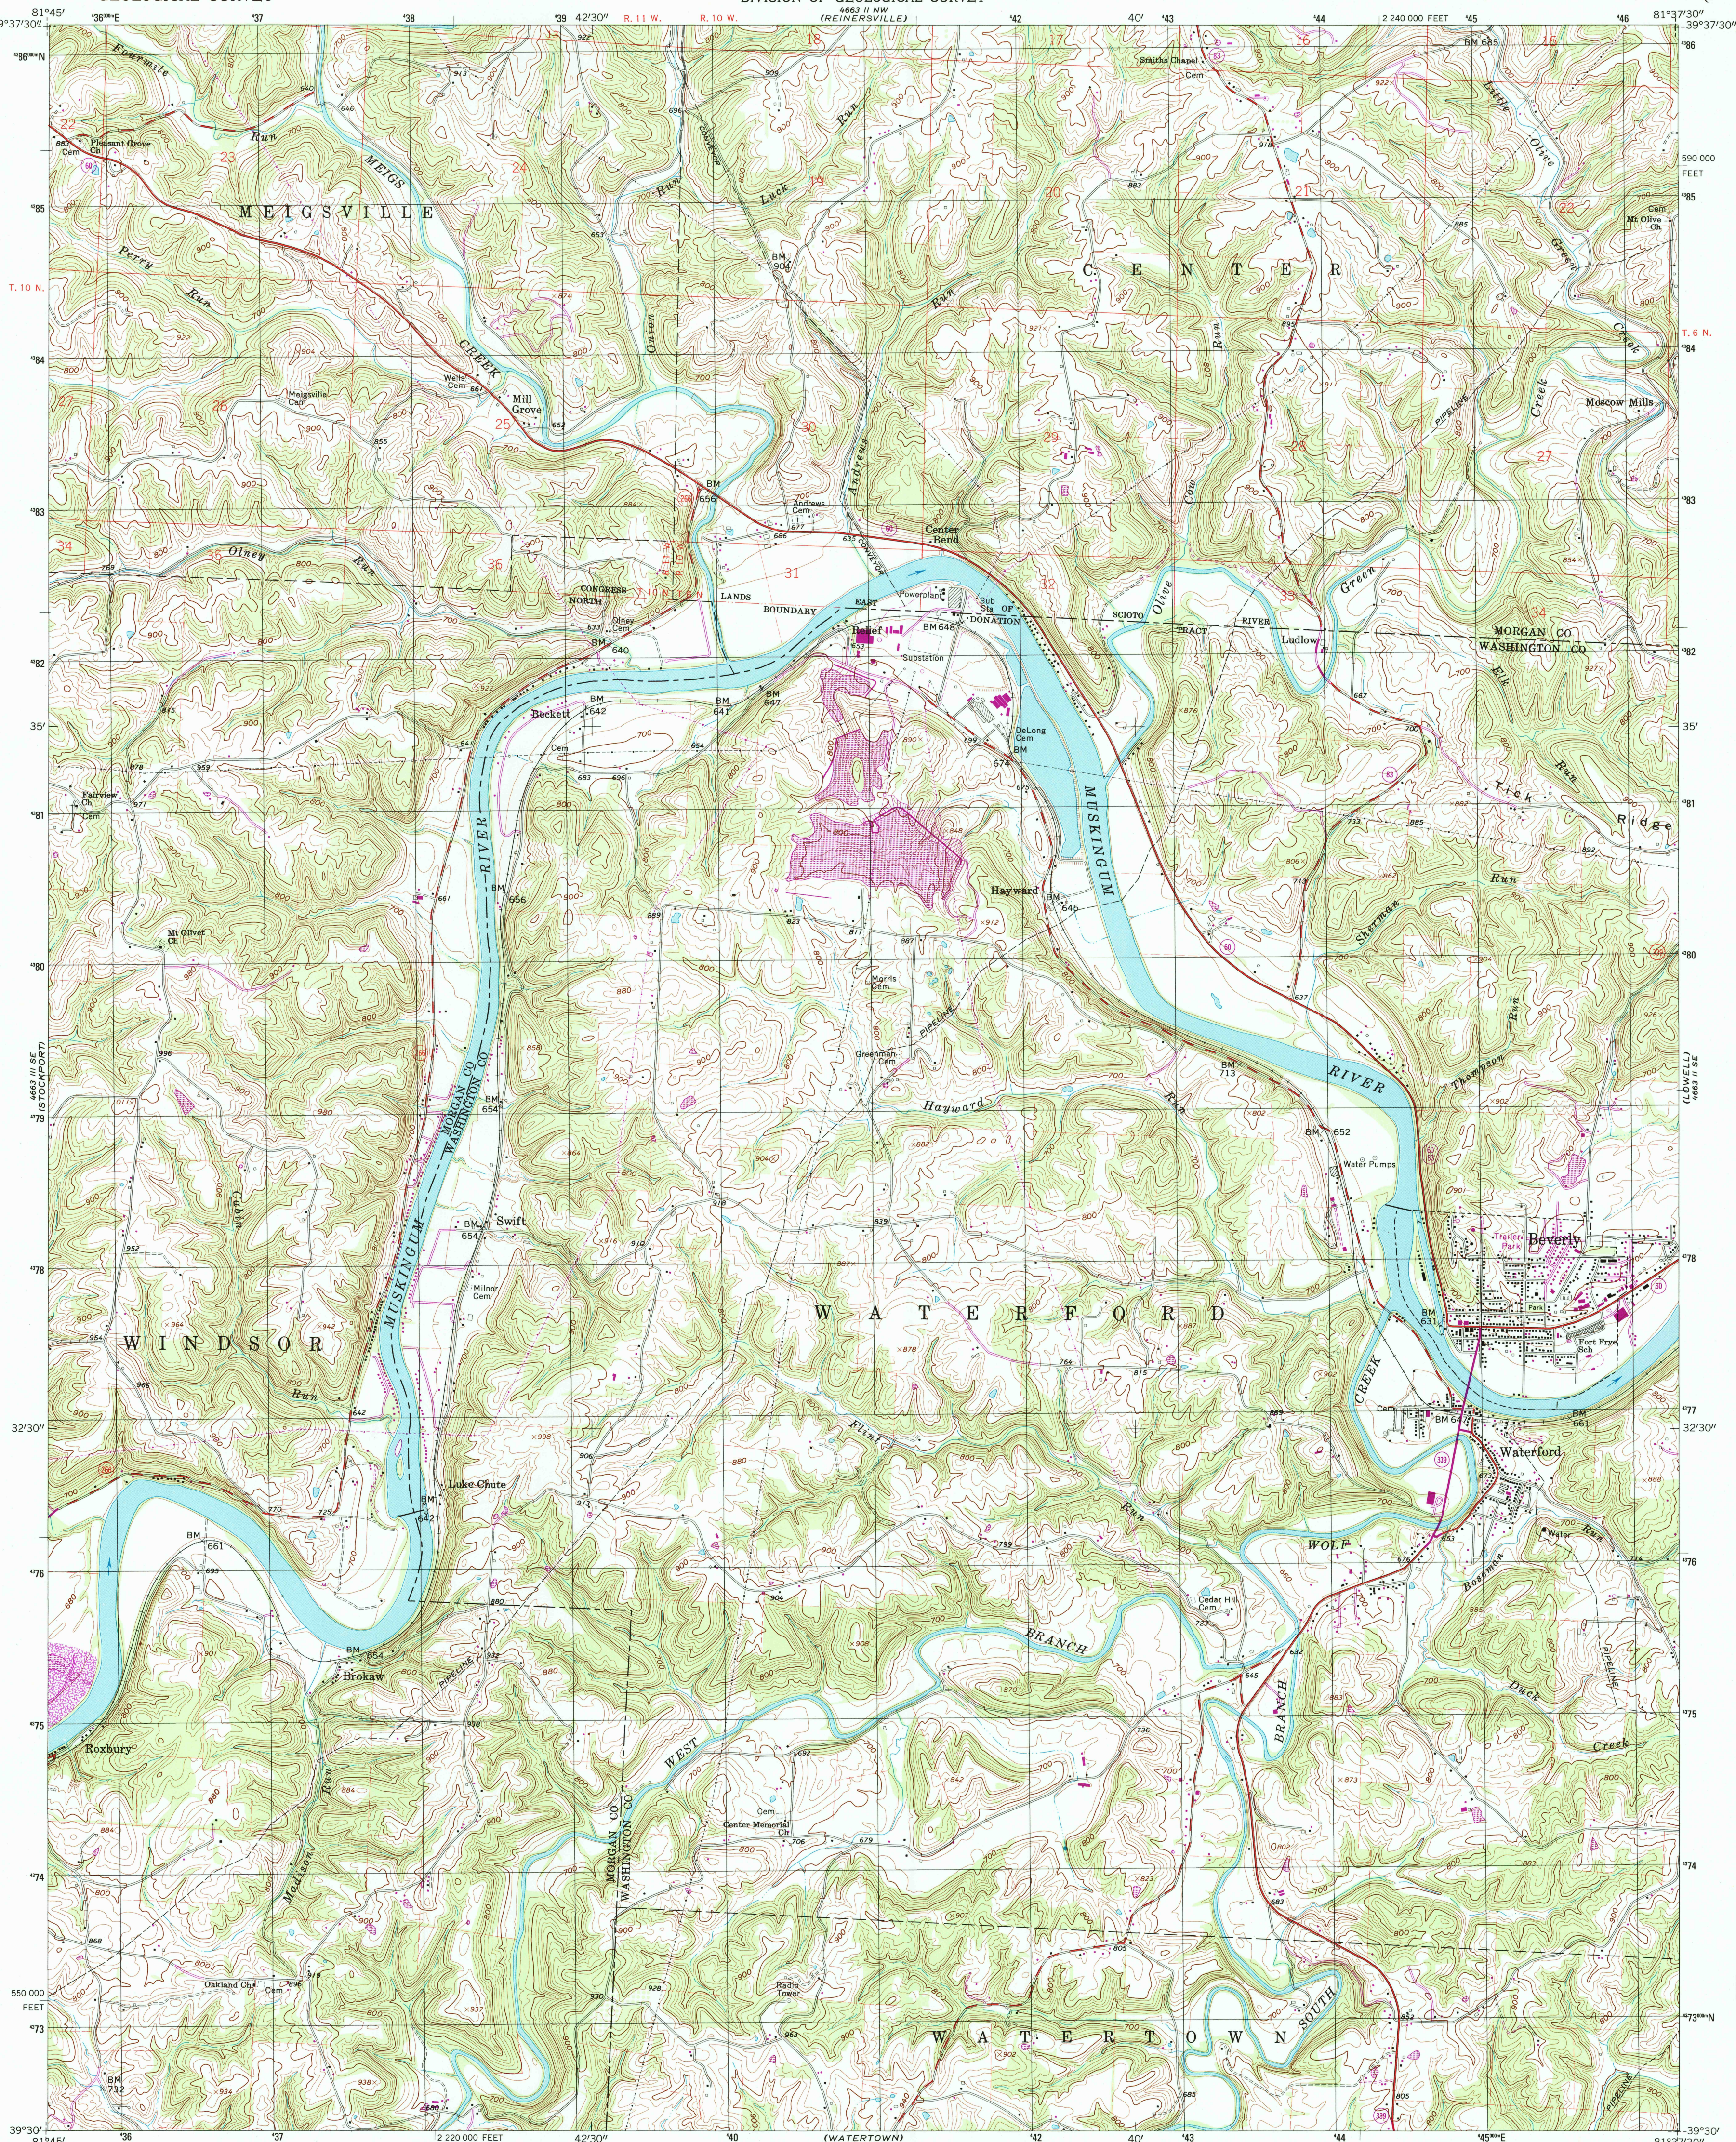

USGS 400 HISTORICAL
MAP ARCHIVES
MAY 31 1998
REC'D FILE COPY

Produced by the United States Geological Survey
Topography compiled 1960. Planimetry derived from imagery taken 1975. Photospectroscopy using imagery dated 1994; no major culture or drainage changes observed. Survey control current as of 1961. Boundaries, other than corporate, verified 1998.
North American Datum of 1927 (NAD 27). Projection and 10 000-foot ticks: Ohio coordinate system, south zone (Lambert conformal conic).
1000-meter Universal Transverse Mercator grid, zone 17.
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.
Land lines based on the Ohio River Base.
Information shown in purple may not meet USGS content standards and may conflict with previously mapped contours.

UTM GRID AND 1987 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

SCALE 1:24 000
1 000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 0 5 10 KILOMETRE

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
Primary highway, hard surface. Light-duty road, hard or improved surface.
Secondary highway, hard surface. Unimproved road.
Interstate Route. U.S. Route. State Route.

BEVERLY, OHIO

1994

NIMA 4663 11 SW-SERIES V852

