



Mapped, edited, and published by the Geological Survey
Revised in cooperation with State of Ohio agencies

Control by USGS and NOS/NOAA



Topography by photogrammetric methods from aerial photographs
taken 1954. Field checked 1955. Revised 1965.

Polycyclic projection. 10,000-foot grid ticks based on Ohio
coordinate system, south zone. 1000-meter Universal Transverse
Mercator grid ticks, zone 16, shown in blue. 1927 North American
Datum. To place on the predicted North American Datum 1983
move the projection lines 3 meters south and 6 meters west as
shown by dashed corner ticks.

Fine red dashed lines indicate selected fence and field lines where
generally visible on aerial photographs. This information unchecked.

Red tint indicates area in which only landmark buildings are shown.

Entire area lies within the Between the Miamis
Land lines based on the Great Miami River Base.

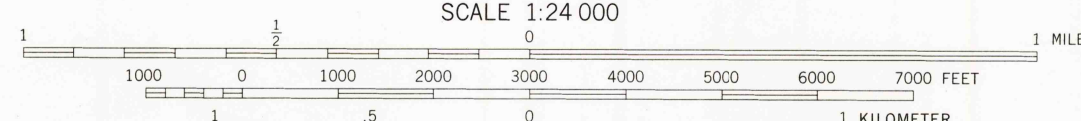

CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
Interstate Route ——— U. S. Route ——— State Route ———



SPRINGBORO, OHIO
N3930-W8407.5/7.5

1965
PHOTOREVISED 1981
DMA 4163 II SW-SERIES V852

Revisions shown in purple and woodland compiled in
cooperation with State of Ohio agencies from aerial photographs
taken 1979 and other sources. This information not field checked
Map edited 1981
Purple tint indicates extension of urban areas

MAY 26 1982