



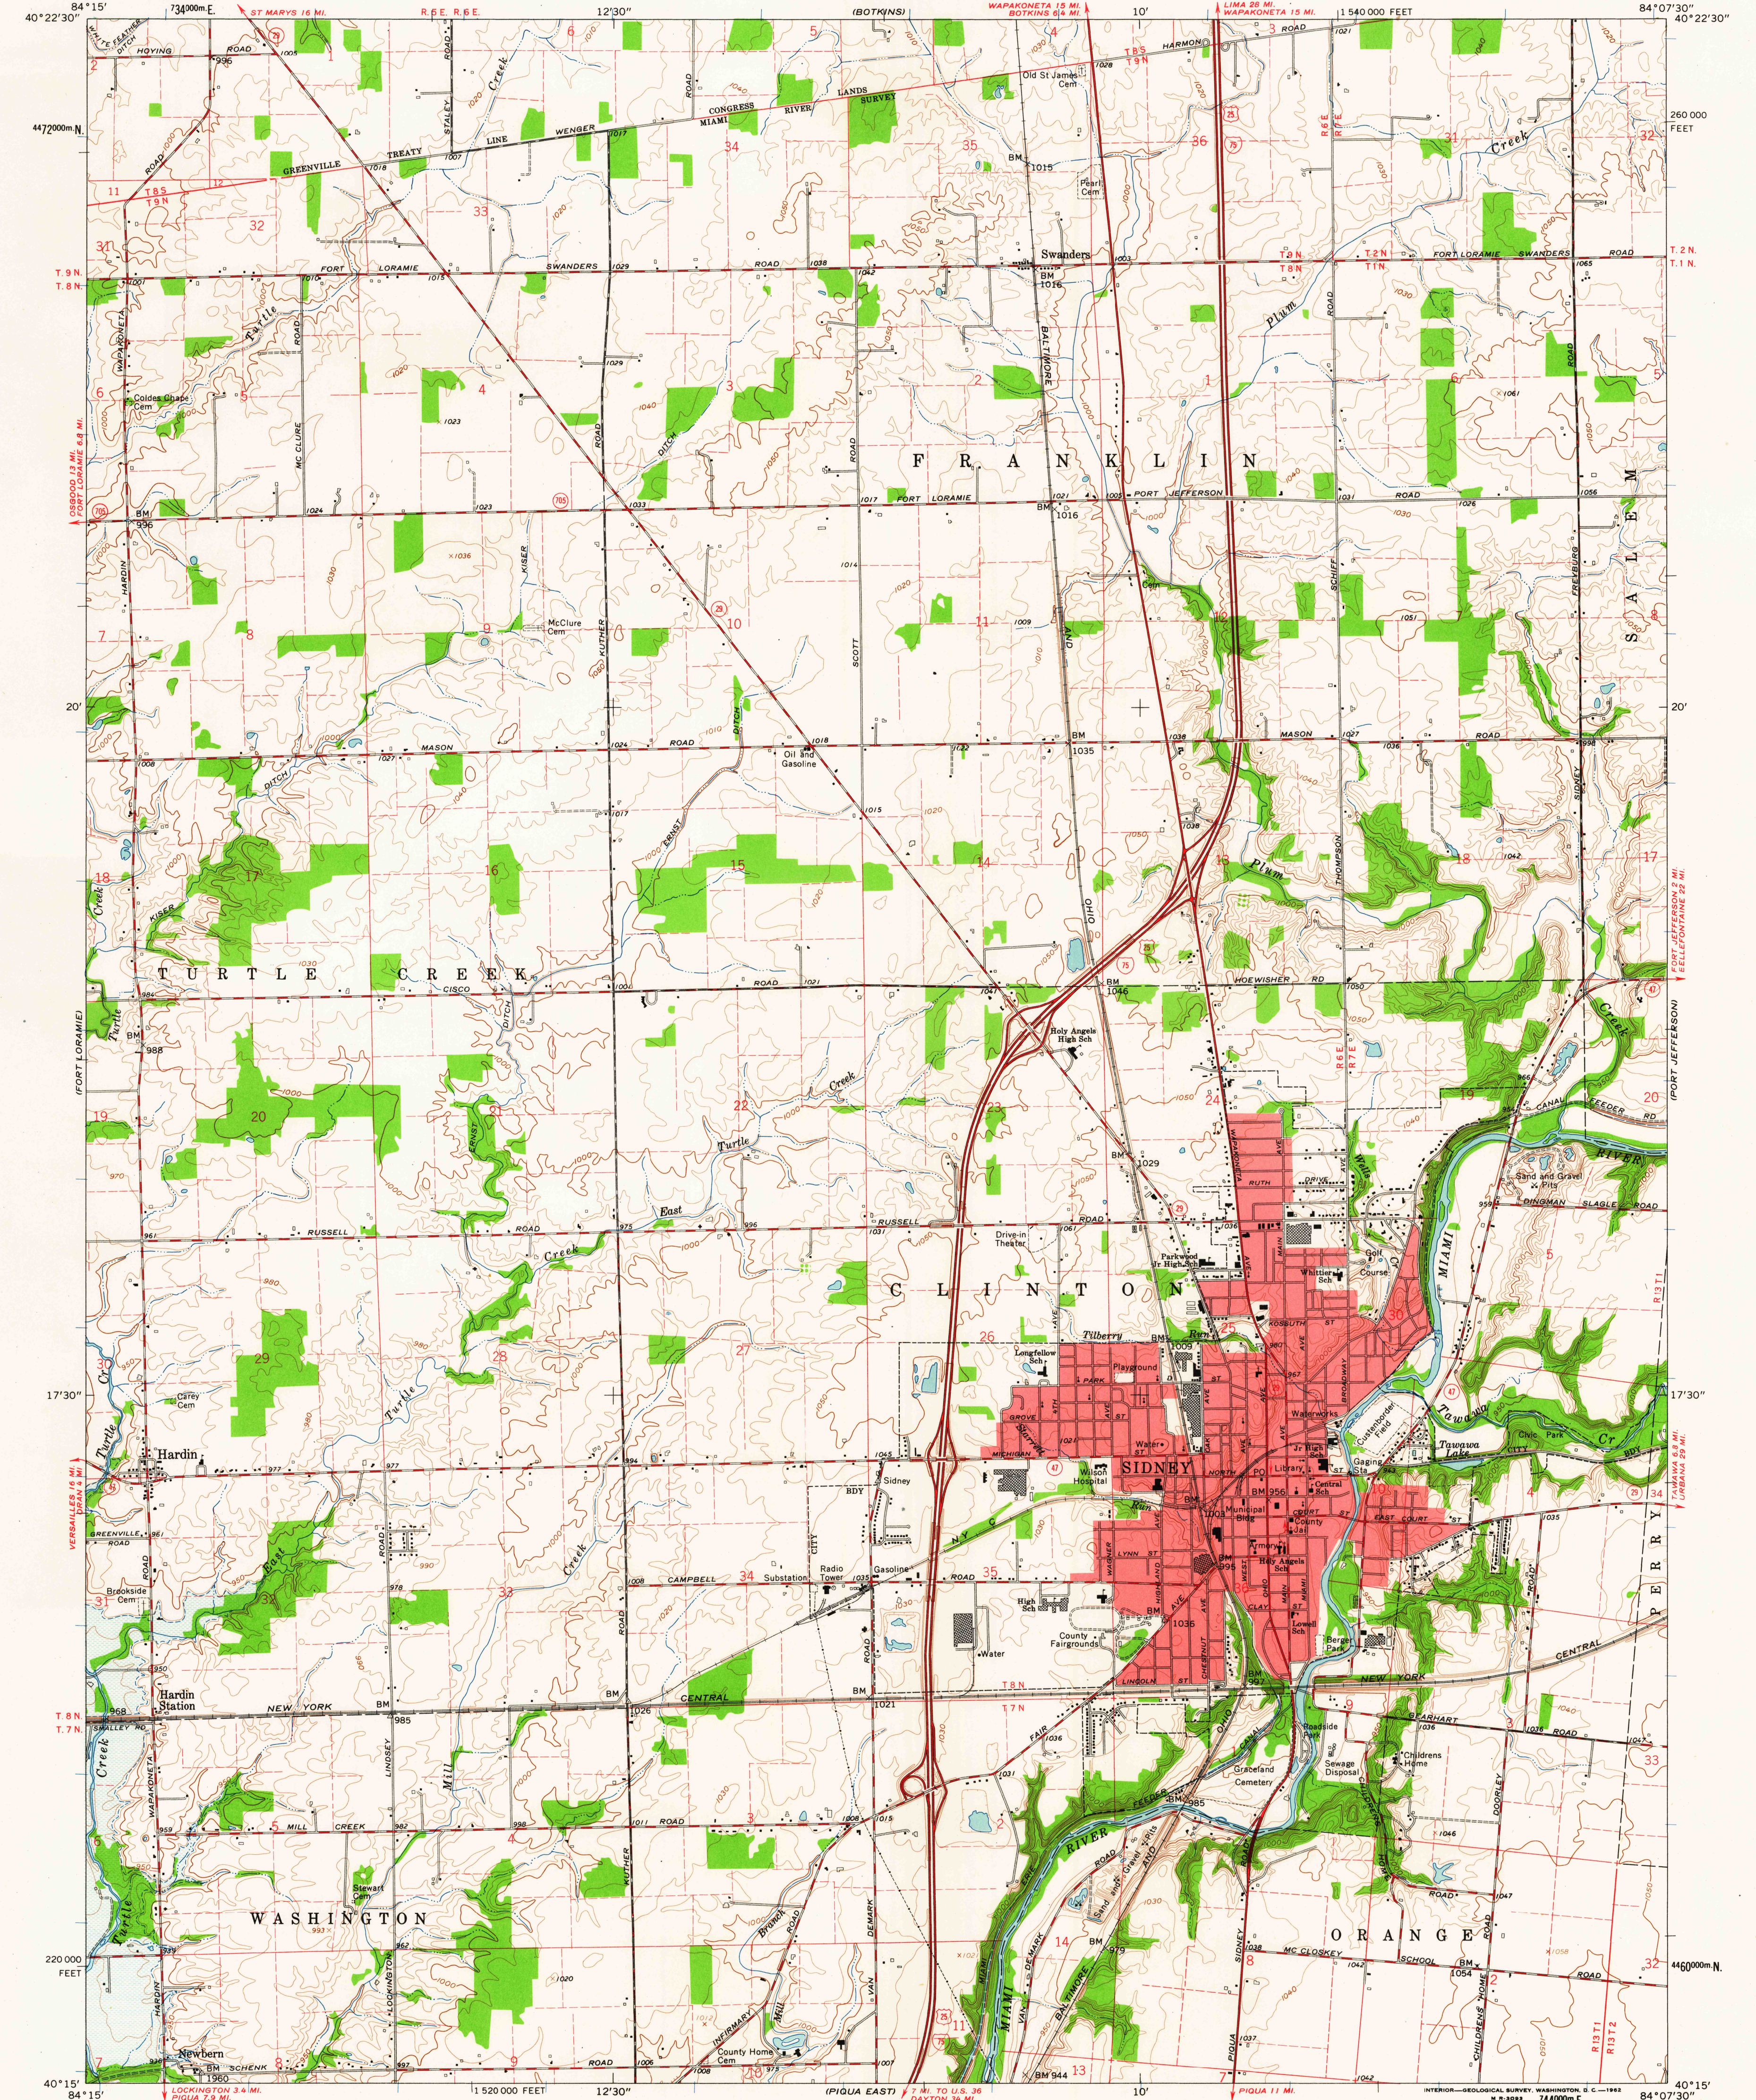

Mapped, edited, and published by the Geological Survey
Control by USGS and USC&GS
Topography by photogrammetric methods from aerial
photographs taken 1959. Field checked 1961
Polyconic projection. 1927 North American datum
10,000-foot grids based on Ohio coordinate system, north zone
1000-meter Universal Transverse Mercator grid ticks, zone 16, shown in blue
Fine red dashed lines indicate selected fence and field lines where
generally visible on aerial photographs. This information is unchecked
Red tint indicates areas in which only landmark buildings are shown
Areas covered by dashed light blue pattern are subject
to controlled inundation to 938 feet by Lockington Dam
Land lines north of the Greenville Treaty Line based on the First
Principal Meridian. Land lines south of the Greenville Treaty Line
based on the Great Miami River Base. Area east of the Miami
River lies within the Between the Miamis. Area west of the Miami
River lies within the Miami River Survey

TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN
DECLINATION, 1961

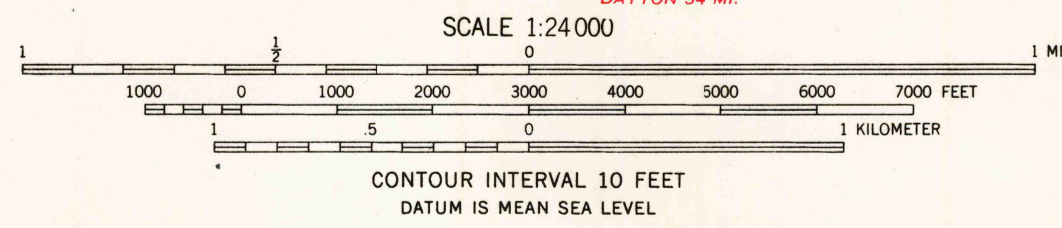

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, WASHINGTON, D.C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS
Historical File
Topographic Division



ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
Interstate Route U.S. Route State Route

SIDNEY, OHIO
SW 1/4 SIDNEY 15' QUADRANGLE
N4015-W8407.5/7.5

1961

USGS
FILE COPY
TOPOGRAPHIC DIVISION

SEP - 5 1962