



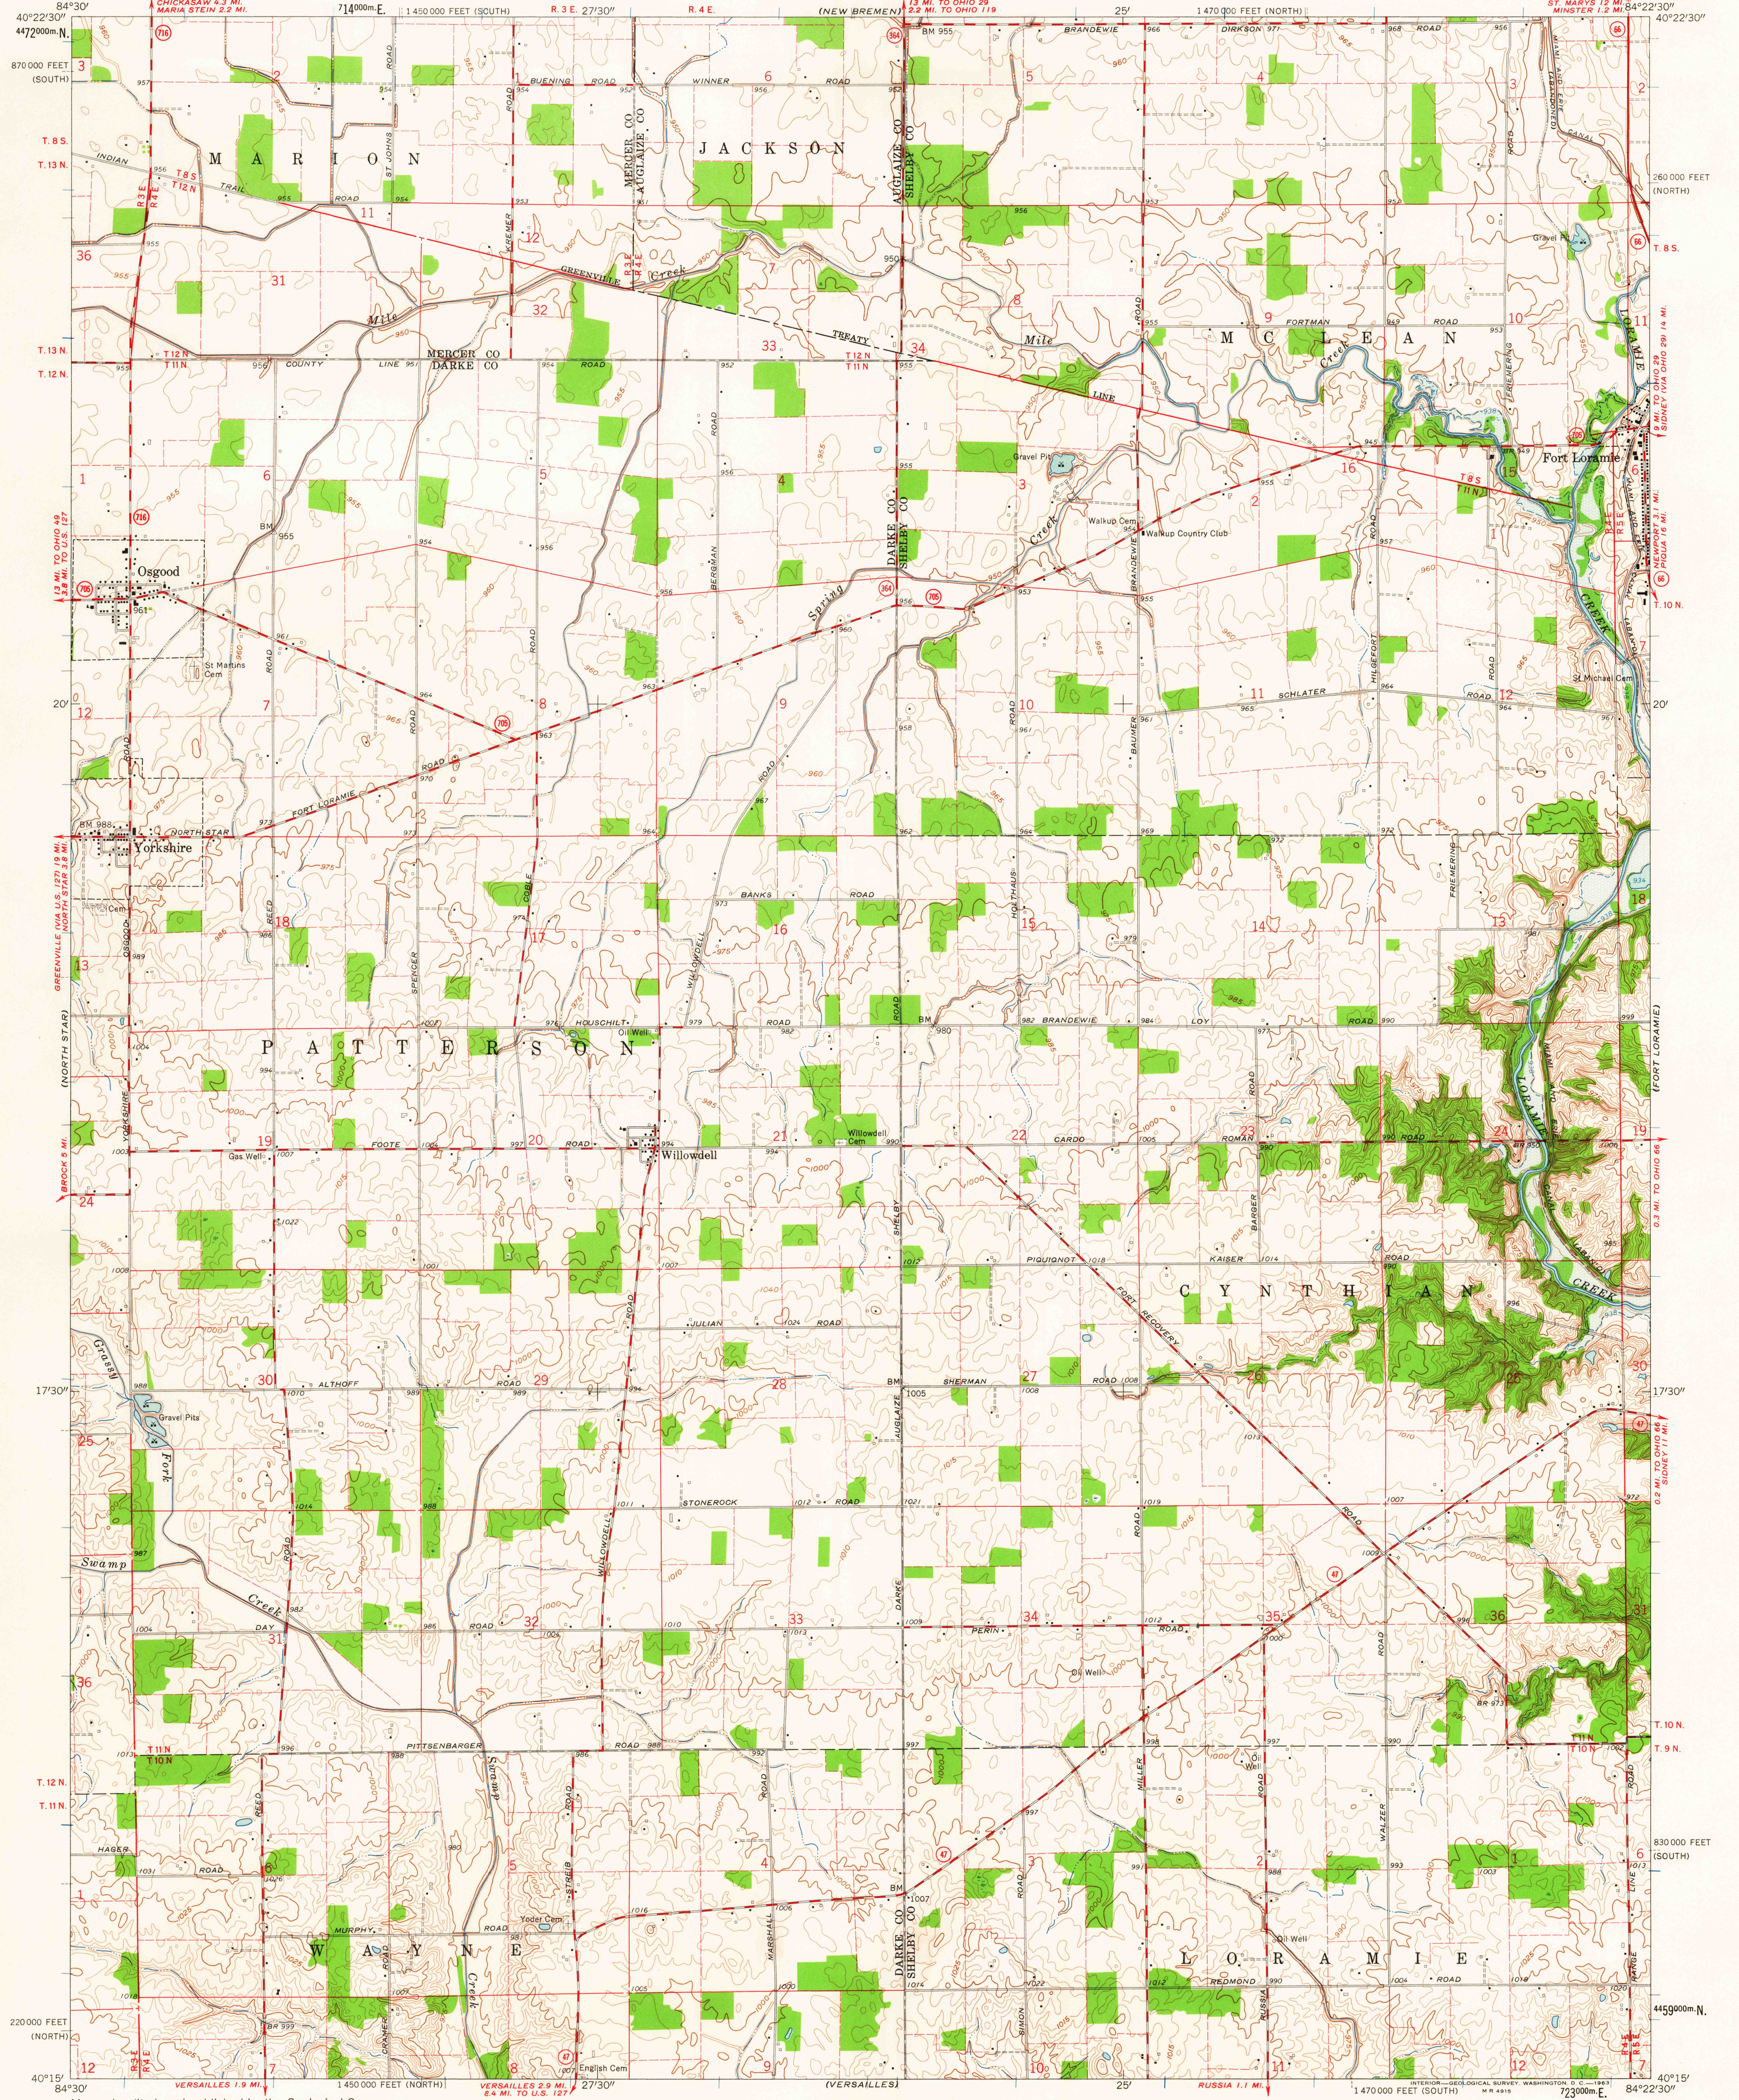

Mapped, edited, and published by the Geological Survey
Control by USGS and USC&GS
Topography by photogrammetric methods from aerial
photographs taken 1960. Field checked 1961
Polyconic projection. 1927 North American datum
10,000-foot grids based on Ohio coordinate system, north and south zones
1000-meter Universal Transverse Mercator grid ticks, zone 16, shown in blue
Area south of the Greenville Treaty Line lies within the Miami River Survey
Land lines based on the Great Miami River Base
Area north of the Greenville Treaty Line lies within Congress Lands
Land lines based on the First Principal Meridian
Areas covered by dashed light-blue pattern are subject to controlled inundation
to 938 feet by Lockington Dam
Fine red dashed lines indicate selected fence and field lines where
generally visible on aerial photographs. This information is unchecked

APPROXIMATE MEAN
DECLINATION, 1961

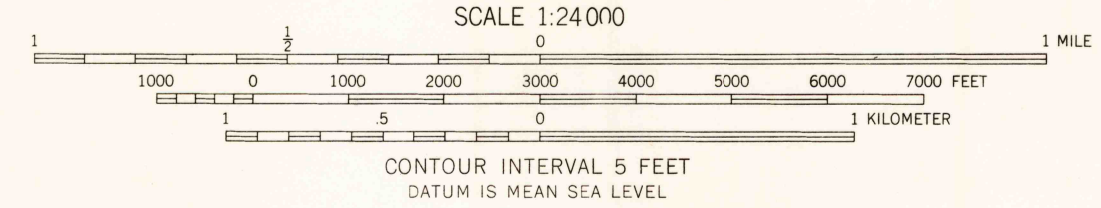

USGS
Historical File
Topographic Division

ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
○ State Route



THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

OSGOOD, OHIO
SW 1/4 LORAMIE 15' QUADRANGLE
N4015-W8422.5/7.5

1961

2710