


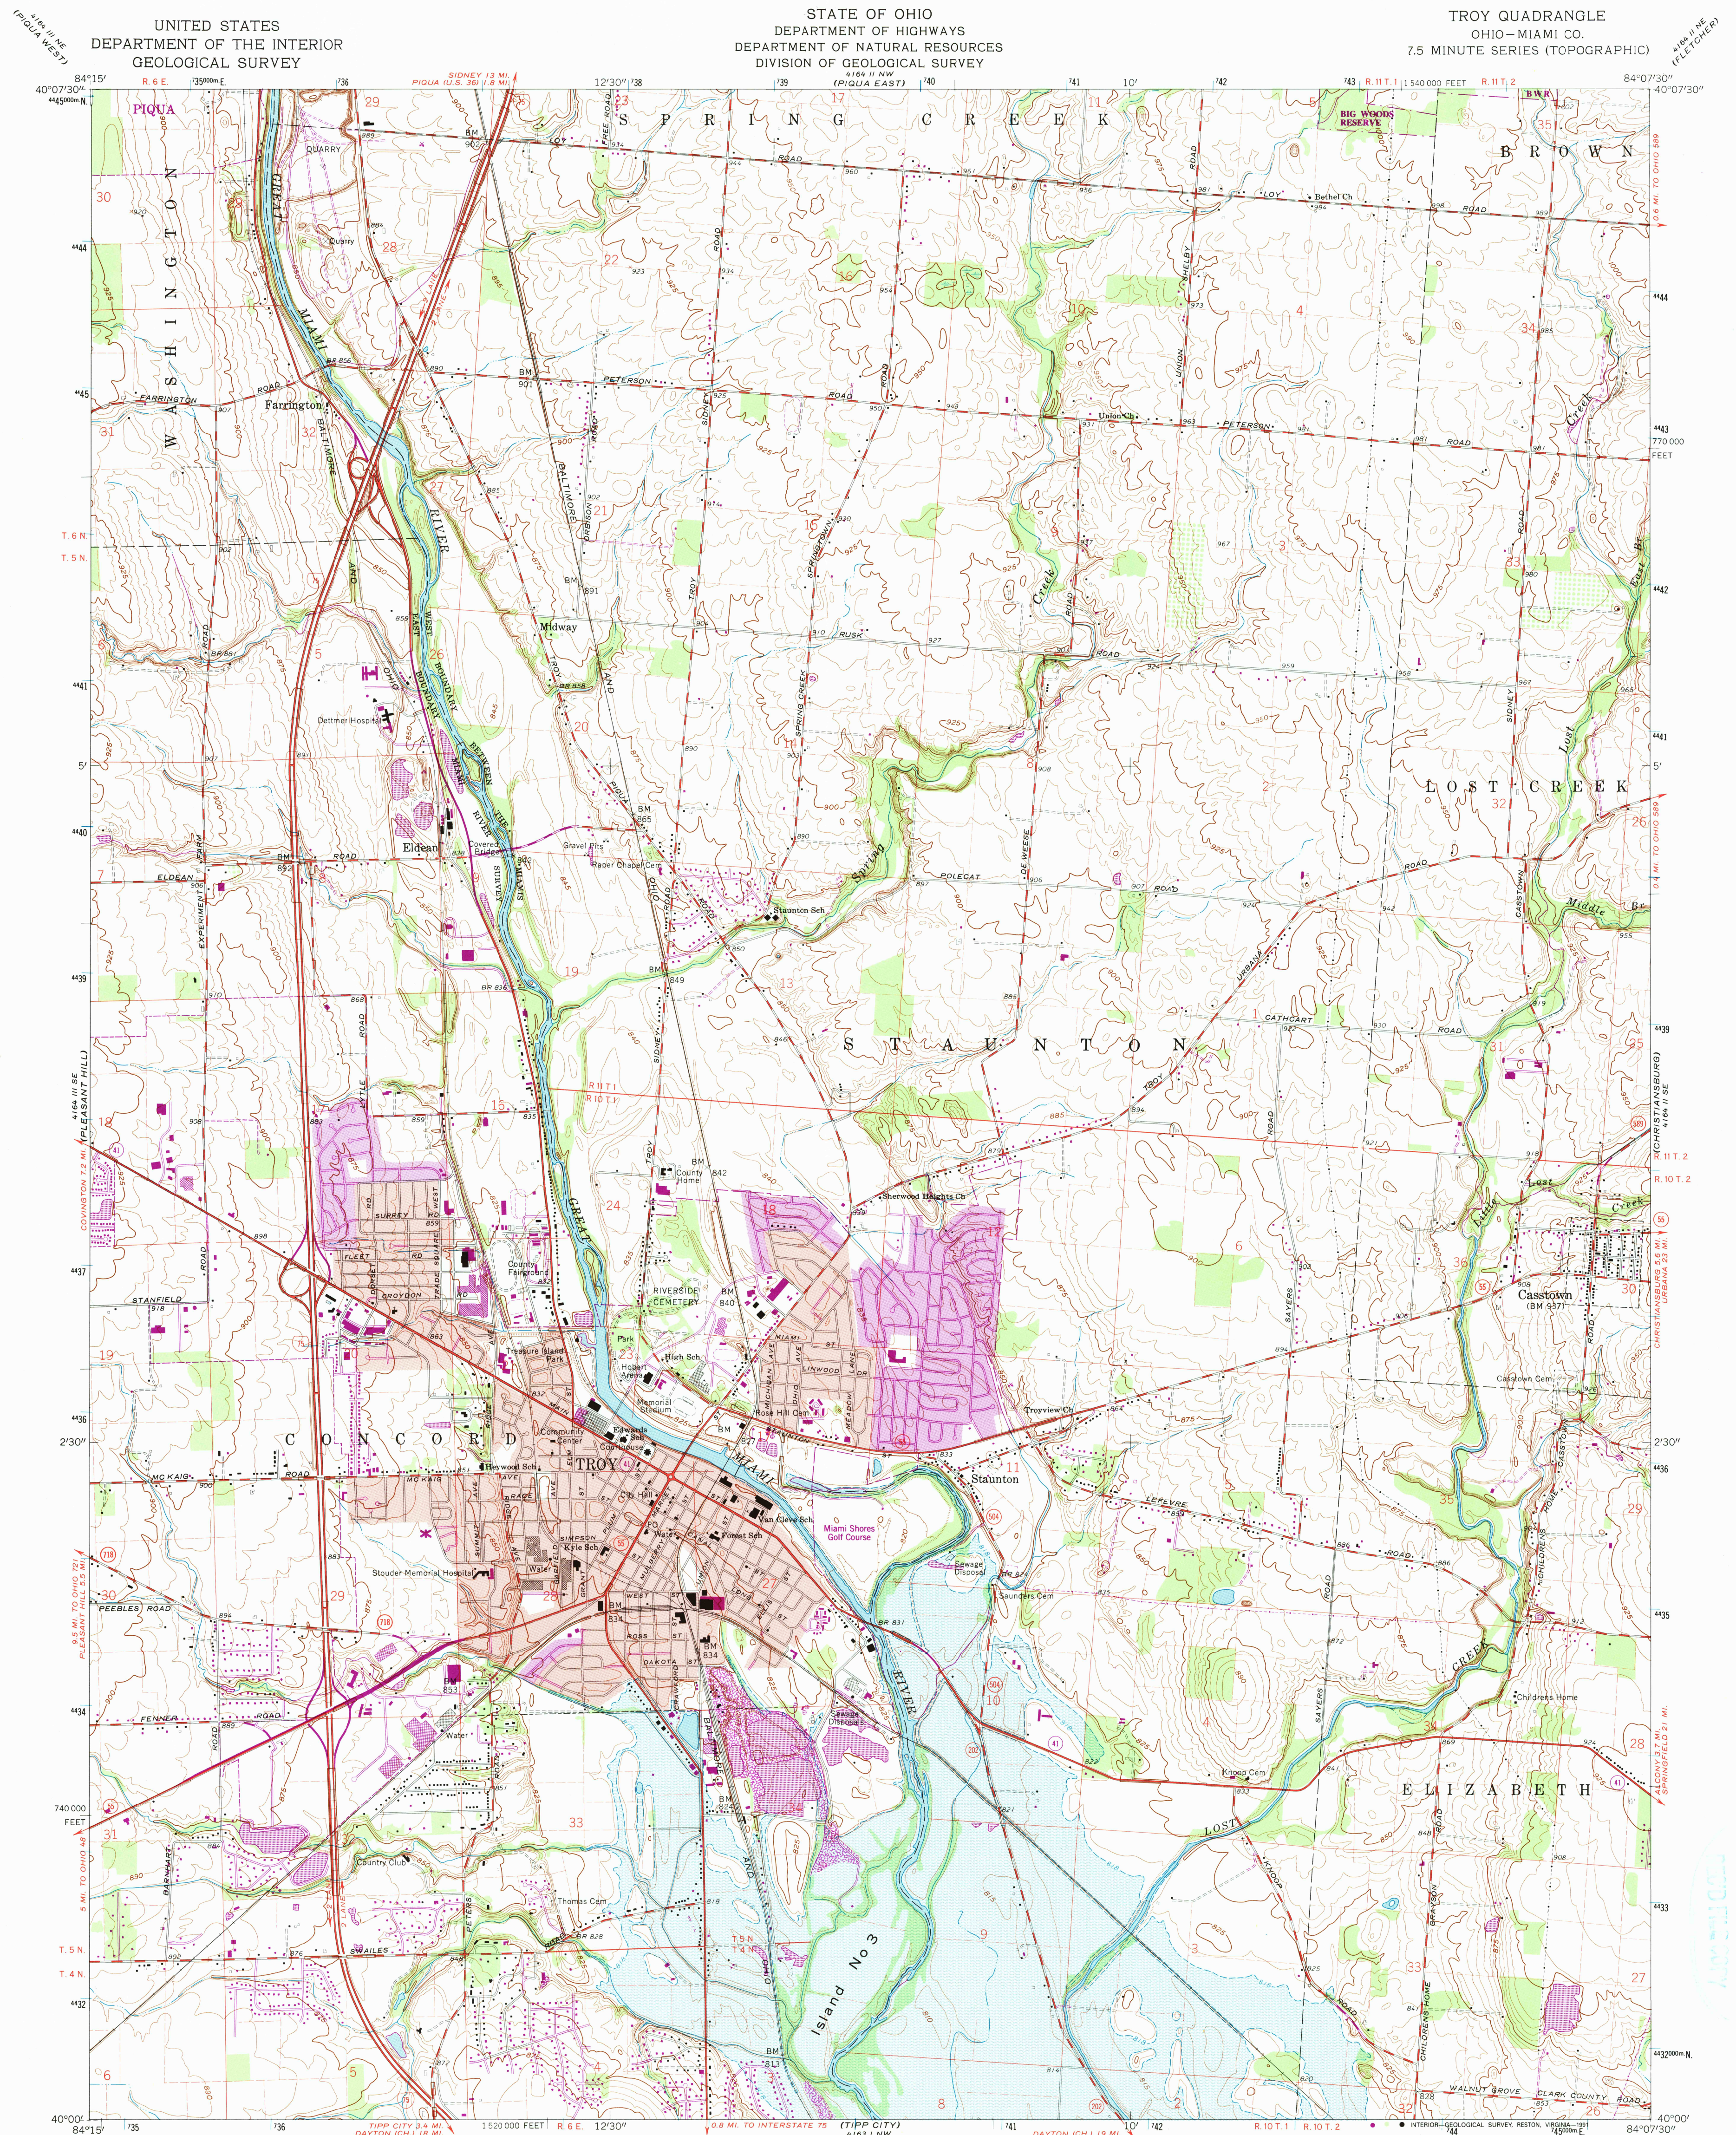

Mapped, edited, and published by the Geological Survey

Control by USGS and NOS/NOAA

Topography by photogrammetric methods from aerial photographs taken 1957 and 1959-60. Field checked 1961


Polycyclic projection. 10,000-foot grid ticks based on Ohio coordinate system, south zone. 1000-meter Universal Transverse Mercator grid ticks, zone 16, shown in blue. 1927 North American Datum To place on the predicted North American Datum 1983 move the projection lines 2 meters south and 6 meters west as shown by dashed corner ticks

Fine red dashed lines indicate selected fence and field lines where generally visible on aerial photographs. This information is unchecked

Red tint indicates areas in which only landmark buildings are shown

Land lines based on the Great Miami River Base


Areas covered by dashed light-blue pattern are subject to controlled inundation to 818 feet by Taylorsville Dam

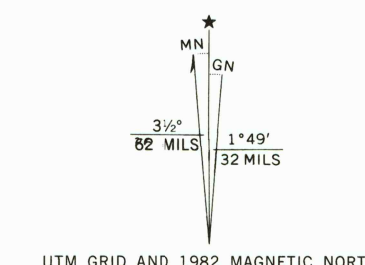

UTM GRID AND 1982 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

Map photocopied 1984

No major culture or drainage changes observed

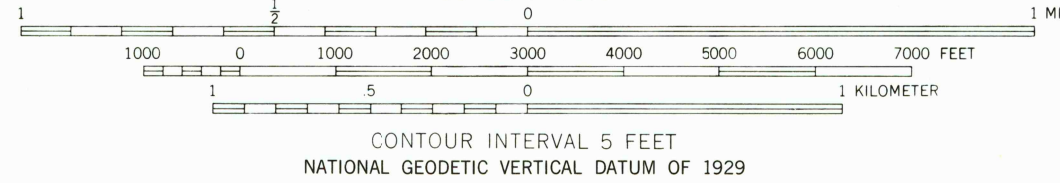


THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS

FOR SALE BY U. S. GEOLOGICAL SURVEY

DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

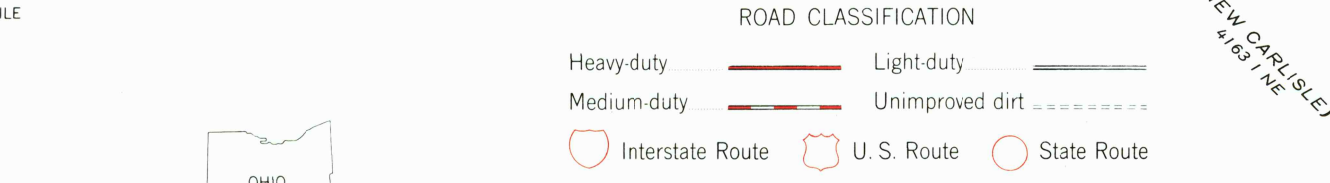

Revisions shown in purple and woodland compiled in cooperation with State of Ohio agencies from aerial photographs taken 1980 and other sources. This information not field checked. Map edited 1982

Purple tint indicates extension of urban areas

TROY, OHIO

N4000—W8407.5/7.5

PHOTOINSPECTED 1984

1961

PHOTOREVISED 1982

DMA 4164 II SW—SERIES V852