


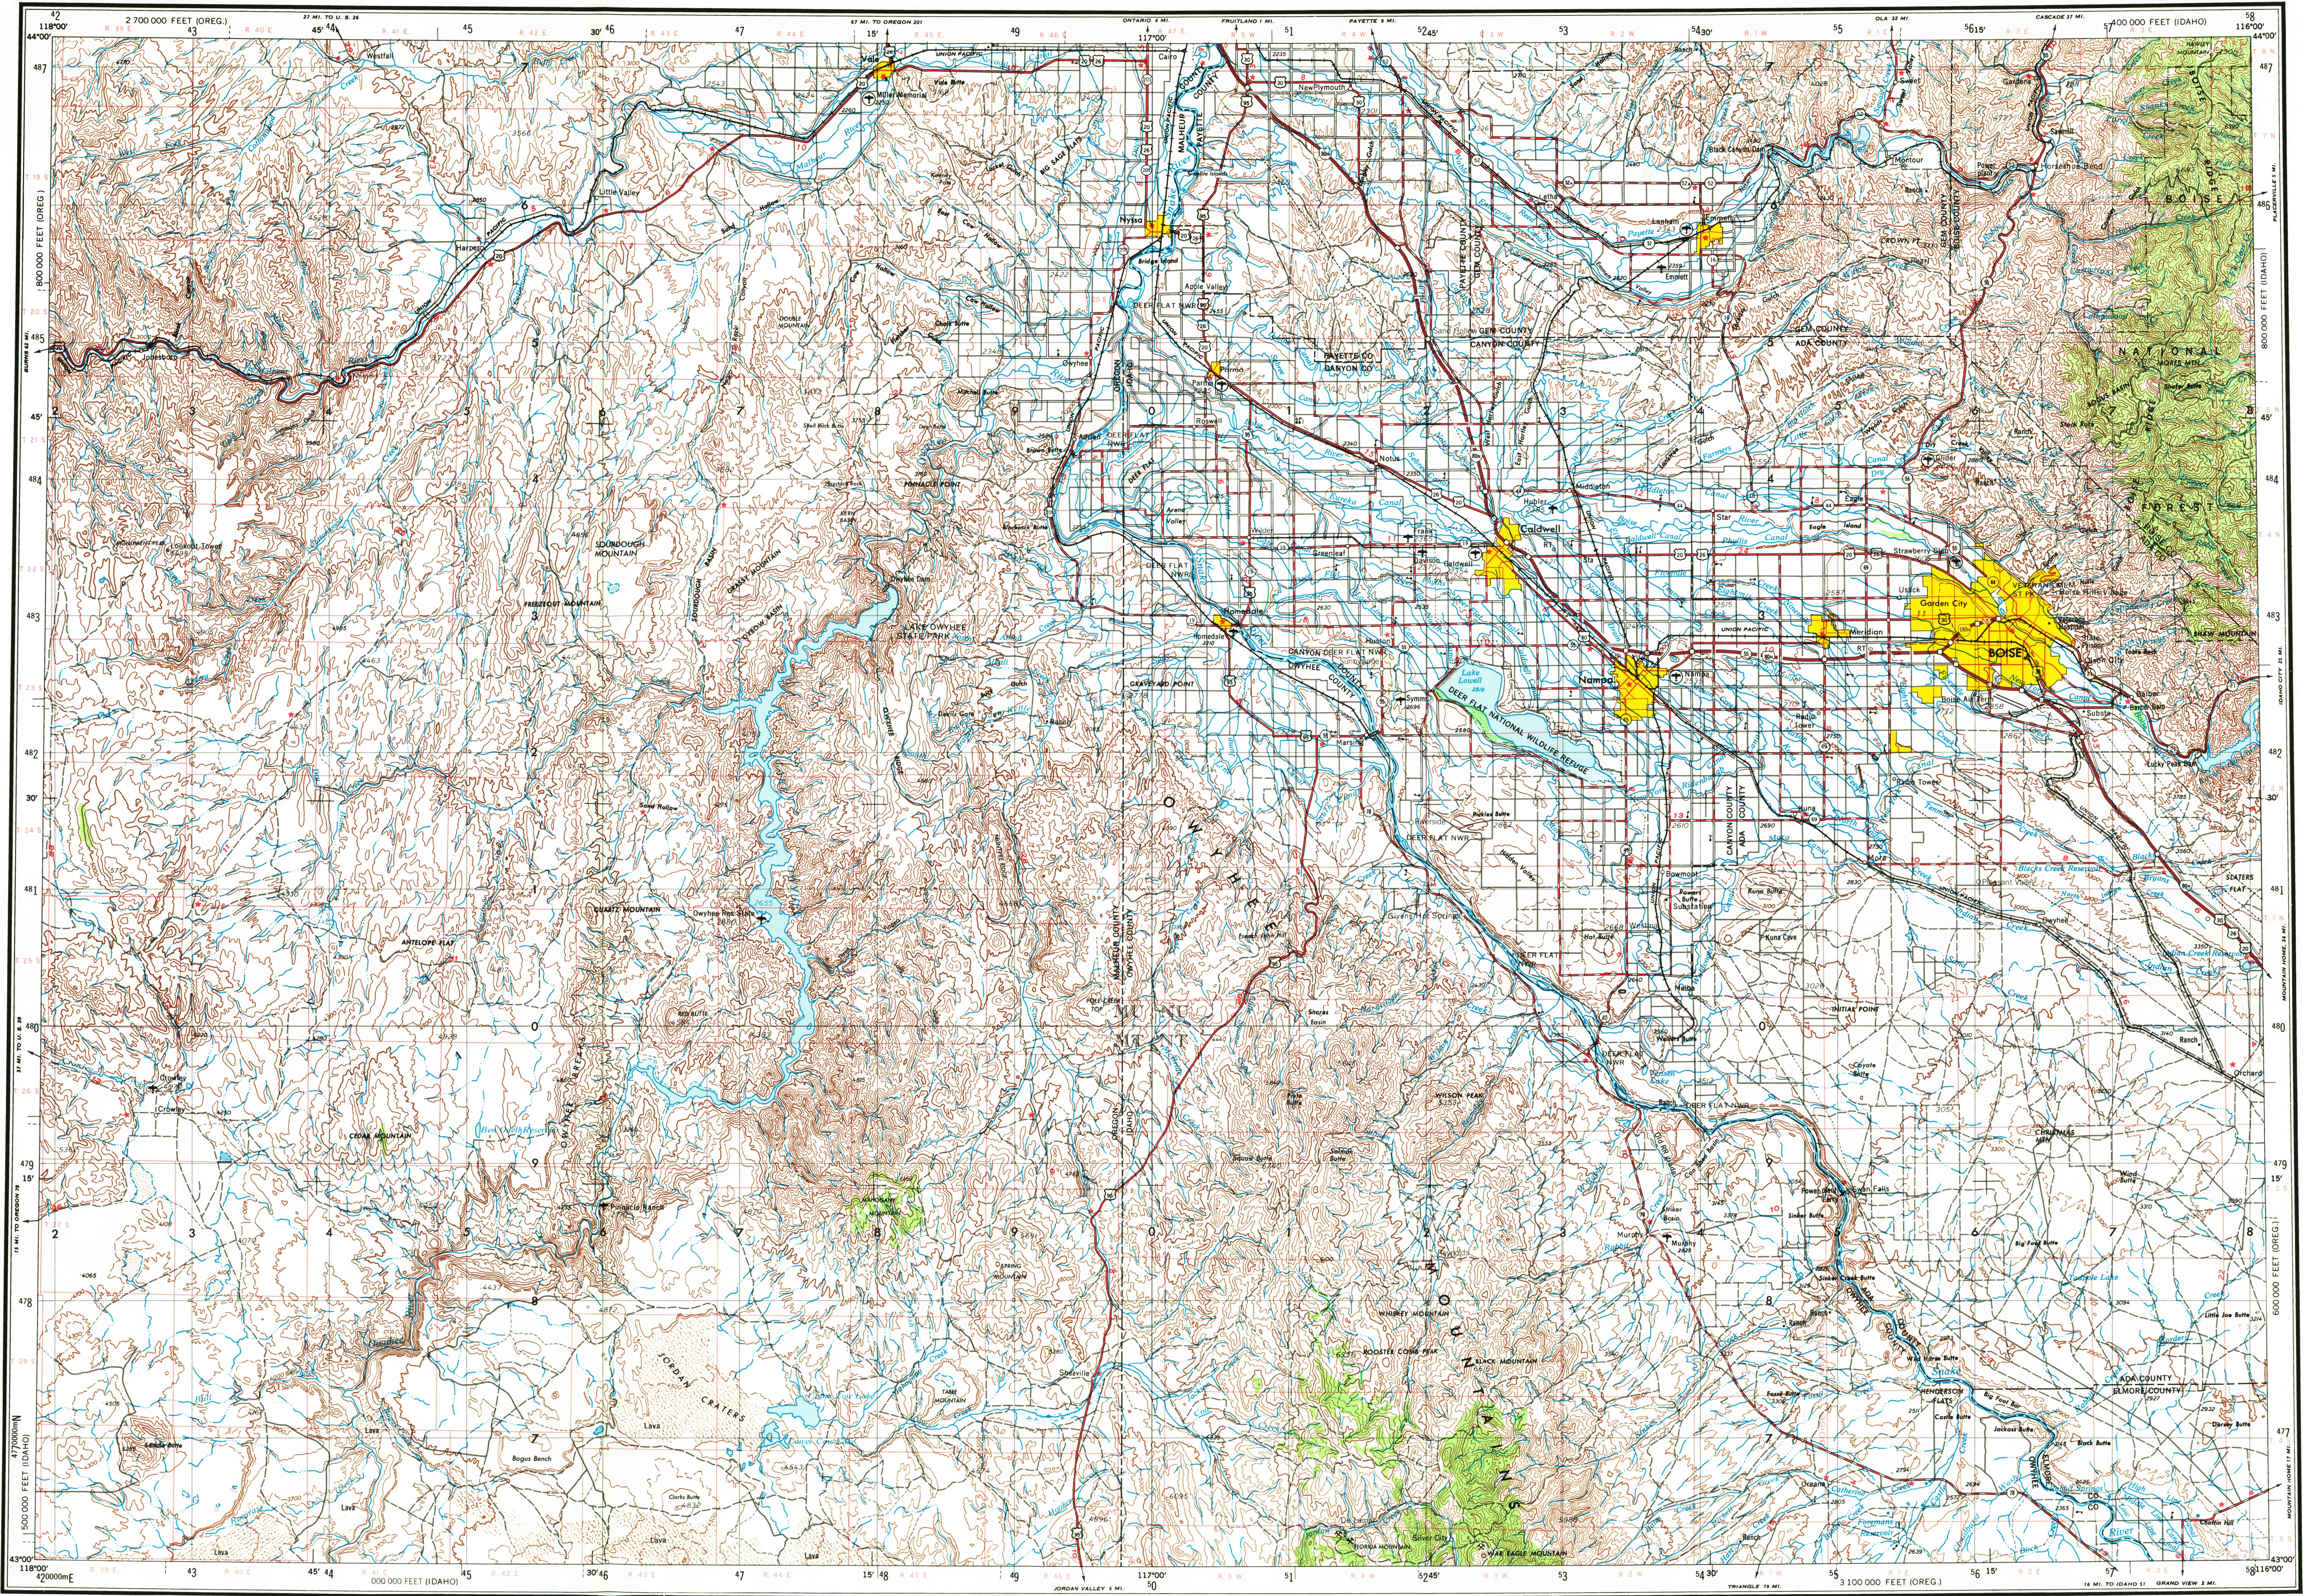

Prepared by the U.S. Army Topographic Command (BPM), Washington, D.C. Compiled in 1956 by photogrammetric methods from aerial photographs taken 1953 and from United States quadrangles, 1:25,000, 1946-48. Photographs field annotated 1955. Revised in 1976 by the U.S. Geological Survey from aerial photographs taken 1975.

100,000-foot grids based on Idaho coordinate system, west zone and Oregon coordinate system, south zone.

Area covered by dashed light-blue pattern is subject to controlled inundation.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

ROADS

Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, hard or improved surface
Fair or dry-weather, unimproved surface
Trail

RAILROADS

Standard gauge
Narrow gauge
Interurban
State
County
Park or reservation

BOUNDARIES

International
State
County
Park or reservation

Other Symbols

Landmark: School; Church; Other
Windmill; Mine
Spot elevation in feet
Marsh or swamp
Intermittent or dry stream
Power line
Woods/brushwood

Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles

0 5 10 15 20 25 30 Kilometers

0 5 10 15 20 Nautical Miles

CONTOUR INTERVAL 200 FEET
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000-METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 11

10% MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 10° 30' WEST TO 10° 30' EAST FOR THE CENTER OF THE WEST EDGE TO 10° 30' WEST TO 10° 30' EAST FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

LOCATION DIAGRAM

WASHINGTON NL 10-9	CRANFILL NL 11-7	IDAHO NL 11-8	UTAH NL 11-9	MONTANA NL 12-7
OREGON NK 10-3	OREGON NK 11-1	OREGON NK 11-2	OREGON NK 11-3	OREGON NK 12-1
CALIFORNIA NK 10-6	CALIFORNIA NK 10-9	NEVADA NK 11-7	NEVADA NK 11-8	NEVADA NK 11-9
ARIZONA NK 10-4	ARIZONA NK 10-7	ARIZONA NK 11-4	ARIZONA NK 11-5	ARIZONA NK 11-6
NEW MEXICO NK 10-5	NEW MEXICO NK 10-8	NEW MEXICO NK 11-3	NEW MEXICO NK 11-4	NEW MEXICO NK 11-5
TEXAS NK 10-1	TEXAS NK 10-2	TEXAS NK 11-1	TEXAS NK 11-2	TEXAS NK 11-3
LOUISIANA NK 10-1	LOUISIANA NK 10-2	LOUISIANA NK 11-1	LOUISIANA NK 11-2	LOUISIANA NK 11-3
MISSISSIPPI NK 10-1	MISSISSIPPI NK 10-2	MISSISSIPPI NK 11-1	MISSISSIPPI NK 11-2	MISSISSIPPI NK 11-3
ALABAMA NK 10-1	ALABAMA NK 10-2	ALABAMA NK 11-1	ALABAMA NK 11-2	ALABAMA NK 11-3
GEORGIA NK 10-1	GEORGIA NK 10-2	GEORGIA NK 11-1	GEORGIA NK 11-2	GEORGIA NK 11-3
FLORIDA NK 10-1	FLORIDA NK 10-2	FLORIDA NK 11-1	FLORIDA NK 11-2	FLORIDA NK 11-3

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION

11T

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: CHURCH

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate first vertical grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the side margin.

3. Estimate tenths from grid line to point.

4. Locate first horizontal grid line below point and read LARGE figure labeling the line either in the left or right margin, or on the side margin.

5. Estimate tenths from grid line to point.

6. Example: 47°00'N 117°00'W

7. If reporting beyond 10' in any direction, prefix Grid Zone Designation, as: 470000N 1170000W

UCS3
Historical File
Topographic Division

BOISE, IDAHO; OREGON
1955
REVISED 1976

DEC 2 1 1977