



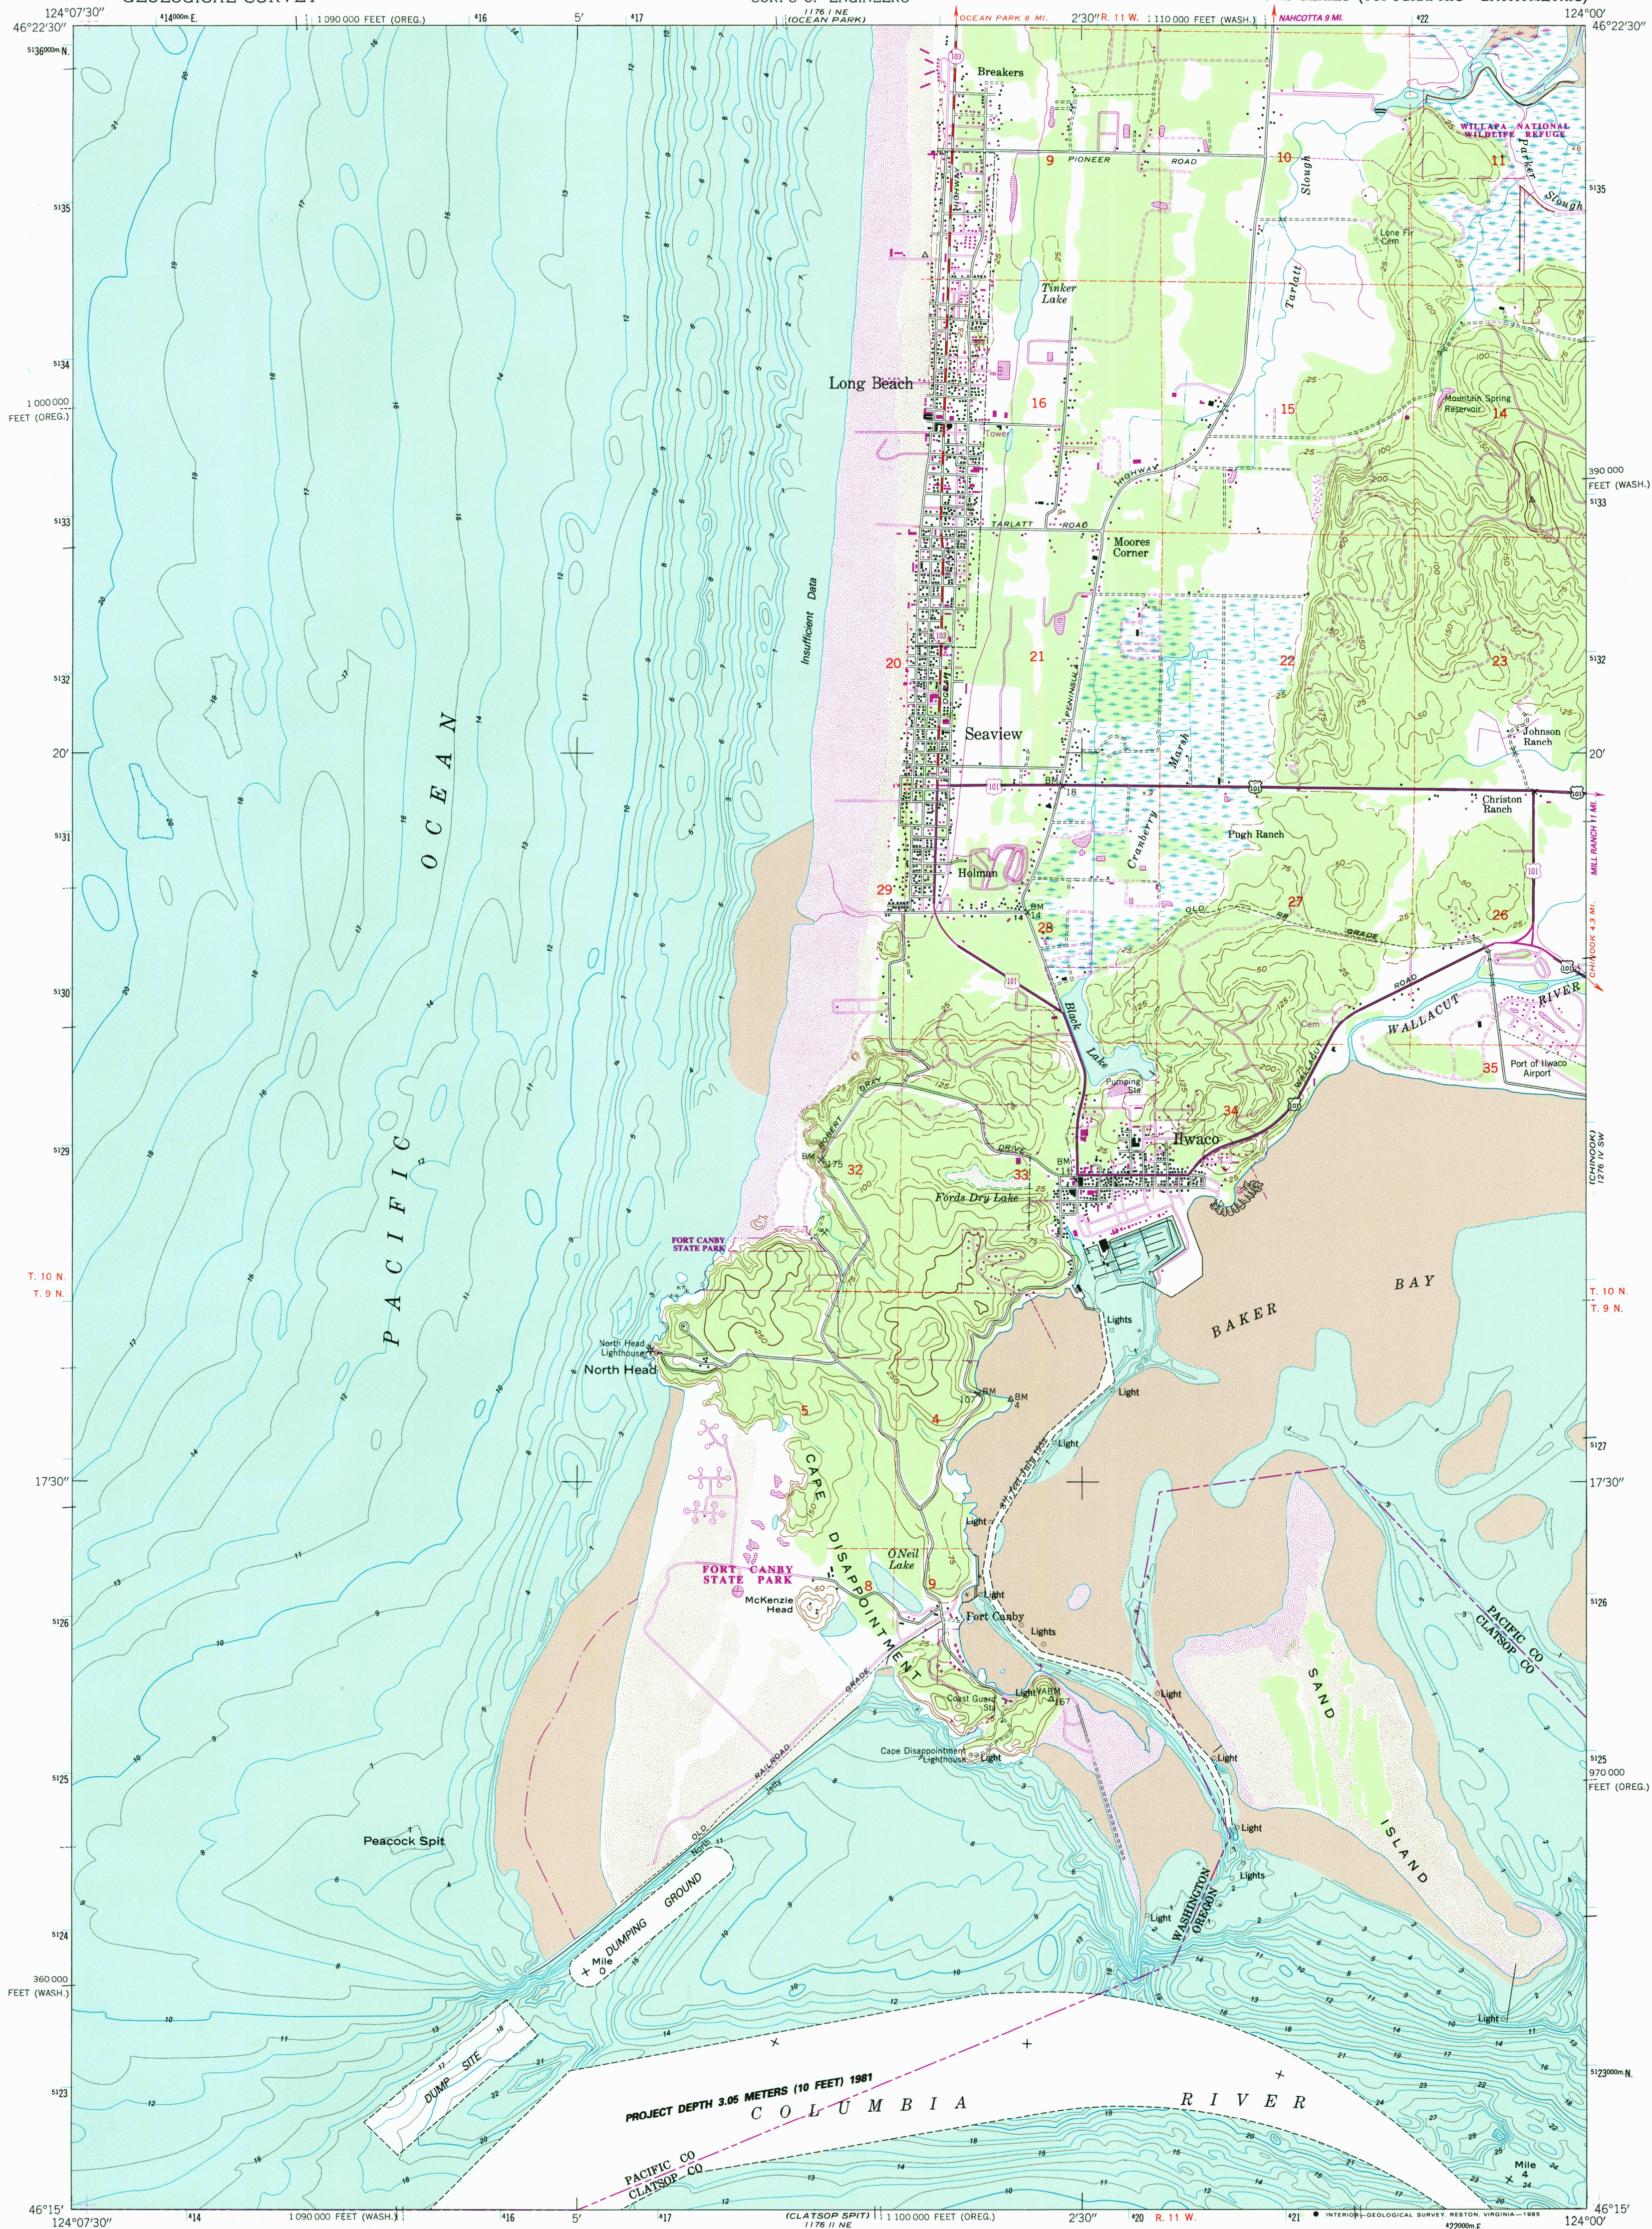


CONVERSION
SCALES

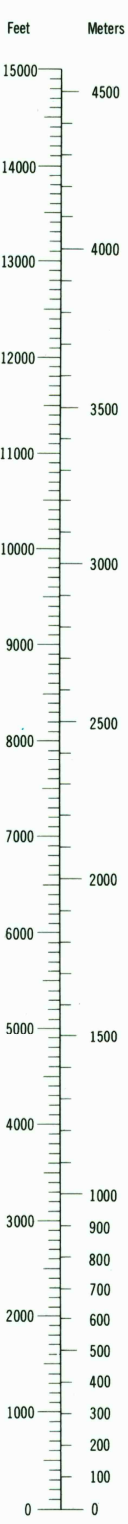


Feet	Meters
1	0.3048
2	0.6096
3	0.9144
4	1.2192
5	1.5240
6	1.8288
7	2.1336
8	2.4384
9	2.7432
10	3.0480

To convert feet to meters
multiply by 0.3048
To convert meters to feet
multiply by 3.2808

DEPTH GRADIENT



Mapped by the Defense Mapping Agency and the National Ocean Service
Published for civil use by the Geological Survey
Control by NOS/NOAA and USCE
Topography by multiplex methods from aerial photographs taken 1943. Field checked 1949
Bathymetry compiled by the National Ocean Service from tide-coordinated hydrographic surveys. This information is not intended for navigational purposes.
Mean low water (dotted) line and mean high water (heavy solid) line compiled by NOS from tide-coordinated aerial photographs. Apparent shoreline (outer edge of vegetation) shown by light solid line.
Polyconic projection. 1927 North American Datum
10,000-foot grid based on Washington coordinate system, south zone and Oregon coordinate system, north zone
1000-meter Universal Transverse Mercator grid ticks, zone 10, shown in blue
To place on the predicted North American Datum 1983, move the projection lines 24 meters north and 97 meters east as shown by dashed corner ticks
Dashed land lines indicate approximate locations
There may be private inholdings within the boundaries of the National or State reservations shown on this map
Revisions shown in purple compiled by the Geological Survey from aerial photographs taken 1981 and other sources
This information not field checked. Map edited 1984

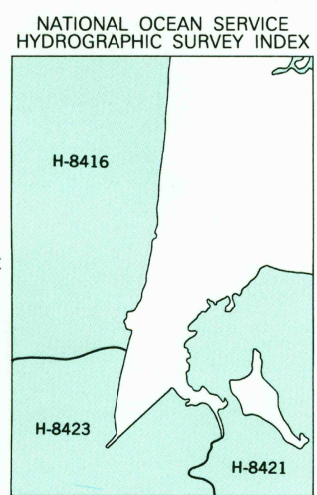

SURVEY NUMBER	SURVEY DATE	SURVEY SCALE	SURVEY LINE SPACING (NAUT. MILES)
H-8416	1958	1:20,000	03-40
H-8421	1958	1:10,000	01-17
H-8423	1958	1:10,000	02-14

SCALE 1:24,000
1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 0 1 2 3 4 5 6 KILOMETER
CONTOUR INTERVAL 50 FEET
DASHED LINES REPRESENT HALF-INTERVAL CONTOURS
NATIONAL GEODETIC VERTICAL DATUM OF 1929
BATHYMETRIC CONTOUR INTERVAL 2 METERS WITH SUPPLEMENTARY 1 METER CONTOURS - DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 2.4 METERS
BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
AND NATIONAL OCEAN SERVICE, ROCKVILLE, MARYLAND 20852
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST
UTM GRID AND 1984 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

ROAD CLASSIFICATION
Heavy-duty 4 LANE 16 LANE Light-duty
Medium-duty 4 LANE 16 LANE Unimproved dirt
U. S. Route State Route
CAPE DISAPPOINTMENT, WASH.-OREG.
46124-C1-TB-024
1949
PHOTOREVISED 1984
BATHYMETRY ADDED 1984
DMA 1176 I SE - SERIES V891
USGS NMD HISTORICAL MAP
DEC 19 1985
REC'D FILE COPY