


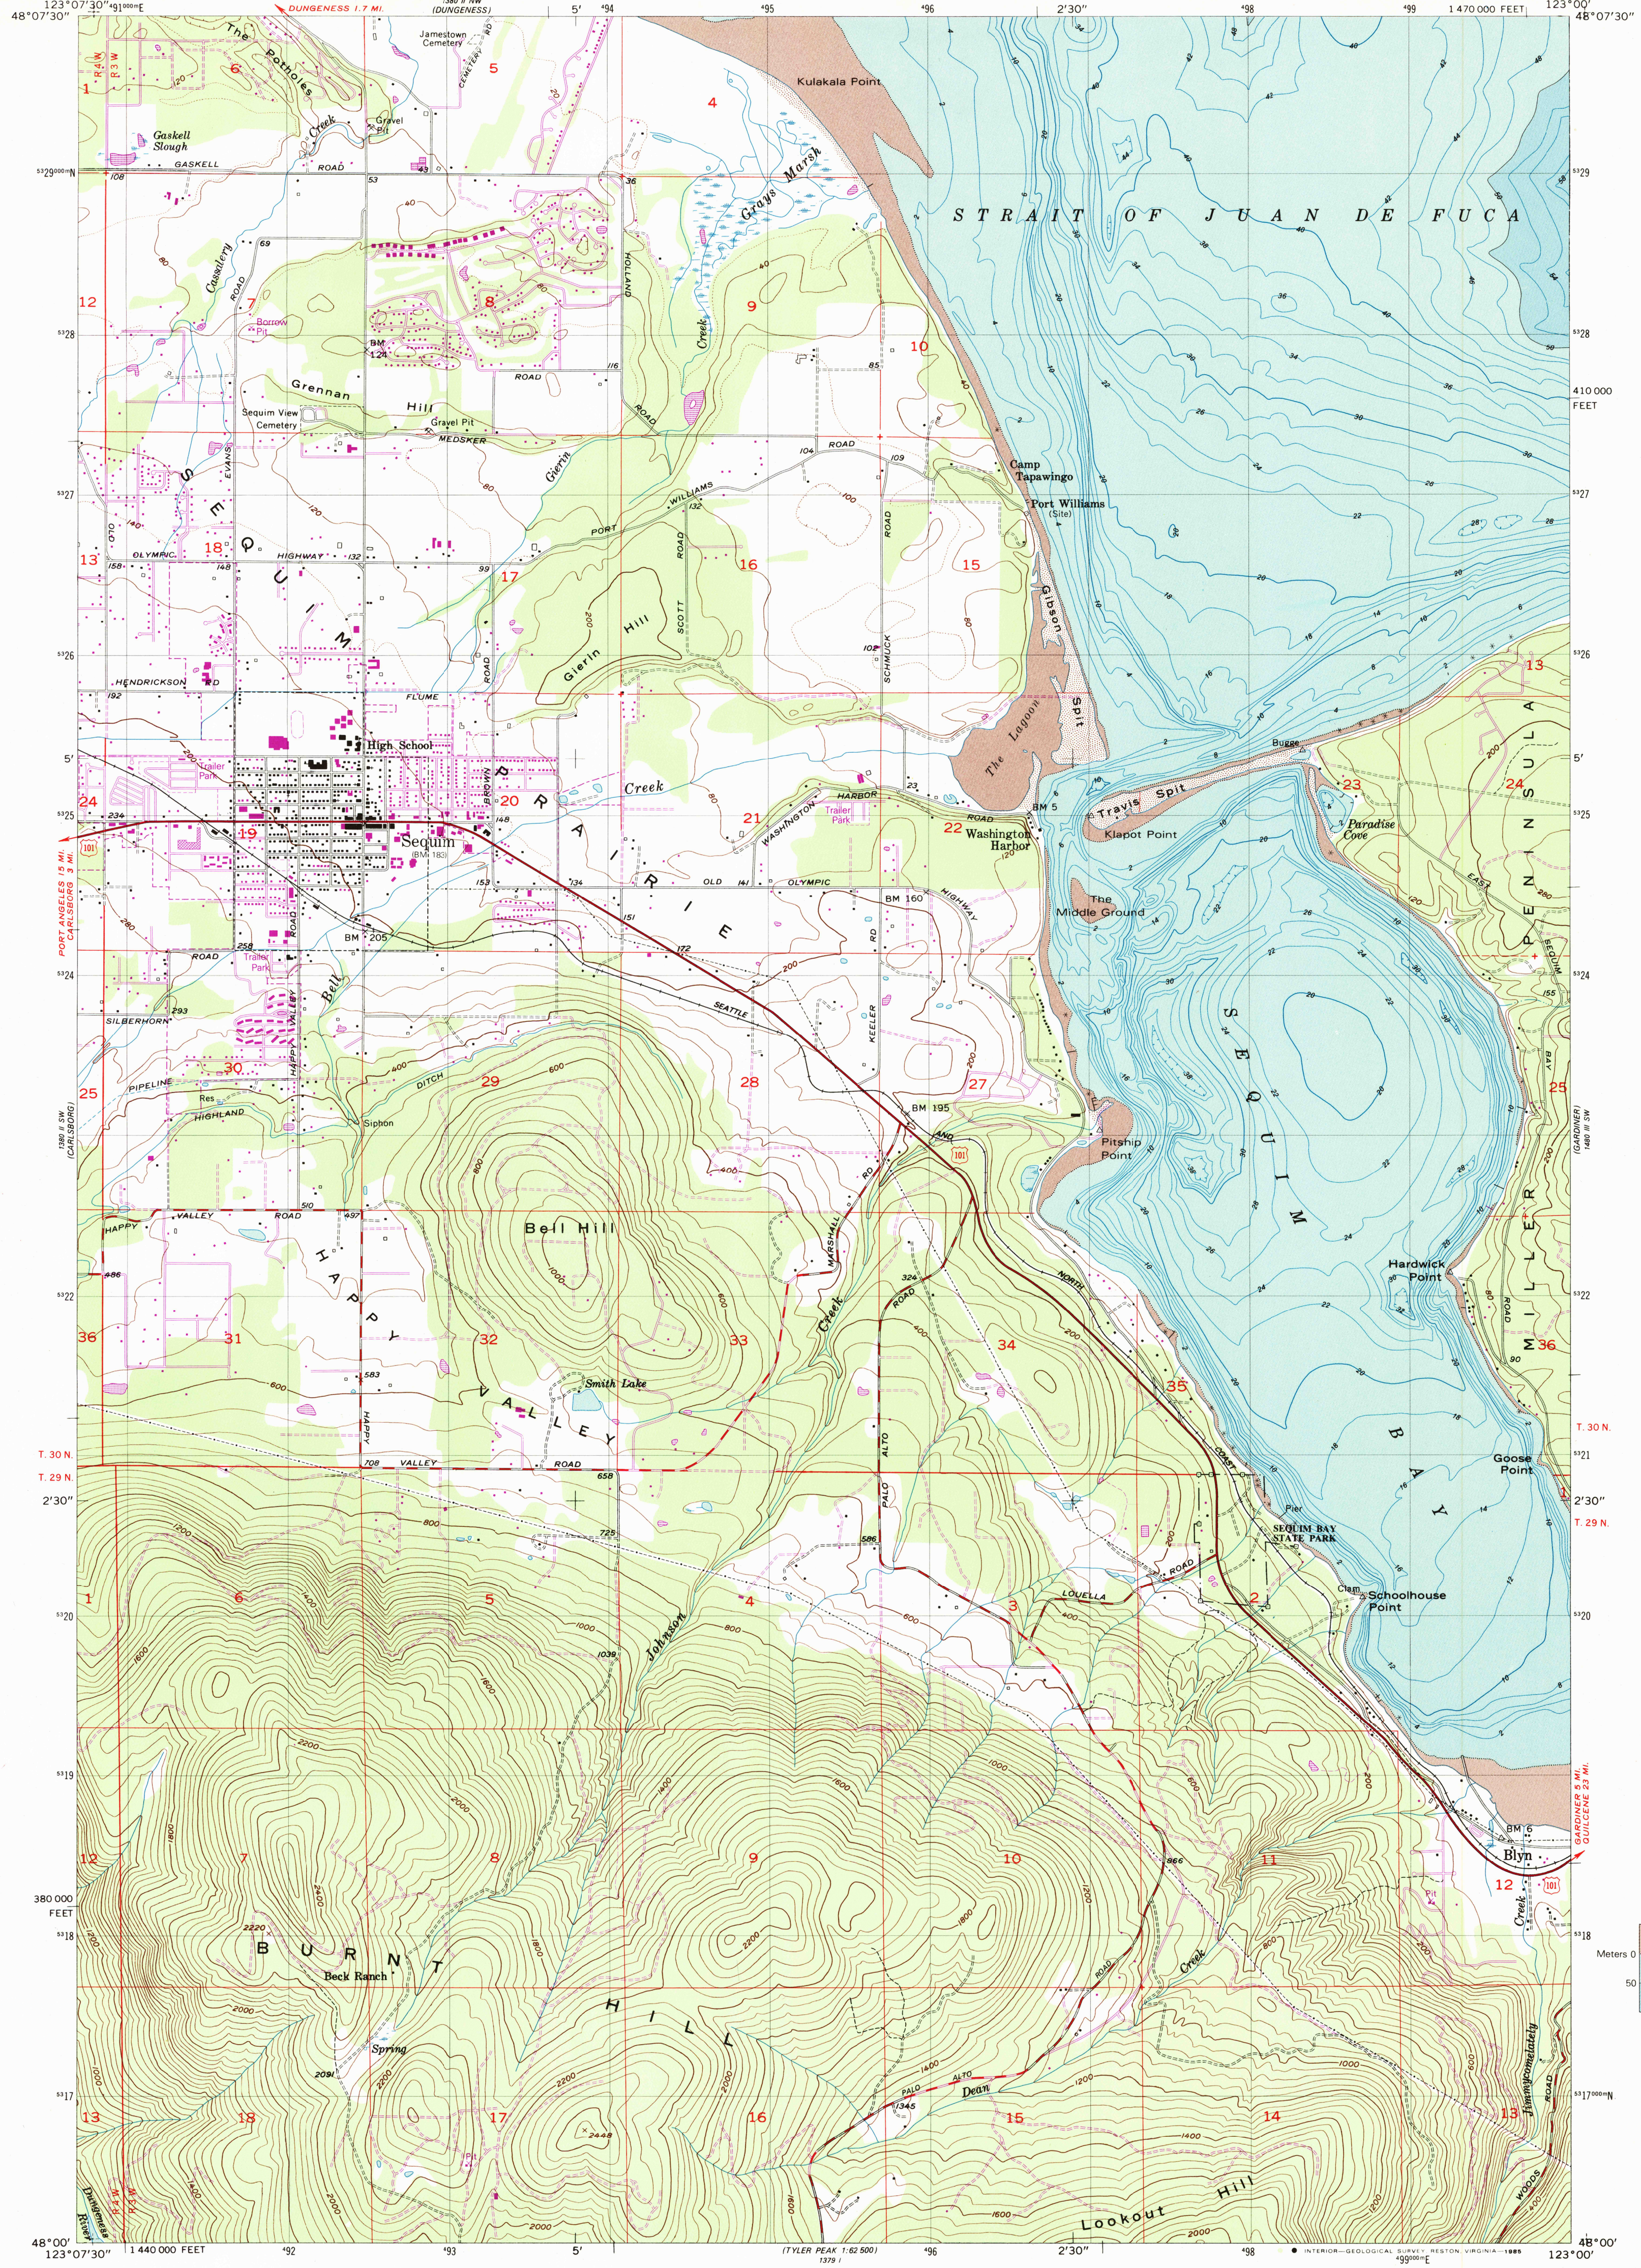

CONVERSION SCALES

| Feet  | Meters |
|-------|--------|
| 15000 | 4500   |
| 14000 | 4000   |
| 13000 | 3500   |
| 12000 | 3000   |
| 11000 | 2500   |
| 10000 | 2000   |
| 9000  | 1500   |
| 8000  | 1000   |
| 7000  | 500    |
| 6000  | 0      |
| 5000  | 1500   |
| 4000  | 1000   |
| 3000  | 500    |
| 2000  | 0      |
| 1000  | 500    |
| 0     | 0      |

To convert feet to meters multiply by 0.3048  
To convert meters to feet multiply by 3.2808

Feet | Meters

|    |       |
|----|-------|
| 1  | 3048  |
| 2  | 6096  |
| 3  | 9144  |
| 4  | 12192 |
| 5  | 15240 |
| 6  | 18288 |
| 7  | 21336 |
| 8  | 24384 |
| 9  | 27432 |
| 10 | 30480 |

Exposed at low tide

|      |      |
|------|------|
| 0    | 0    |
| 50   | 164  |
| 100  | 328  |
| 150  | 492  |
| 200  | 656  |
| 250  | 820  |
| 300  | 984  |
| 350  | 1148 |
| 400  | 1312 |
| 450  | 1476 |
| 500  | 1640 |
| 550  | 1804 |
| 600  | 1968 |
| 650  | 2132 |
| 700  | 2296 |
| 750  | 2460 |
| 800  | 2624 |
| 850  | 2788 |
| 900  | 2952 |
| 950  | 3116 |
| 1000 | 3280 |

Maximum depth

Mapped, edited, and published by the Geological Survey and the National Ocean Survey  
Control by USGS, NOS/NOAA, and USCE  
Topography by photogrammetric methods from aerial photographs taken 1954. Field checked 1956  
Bathymetry compiled by the National Ocean Survey from tide-coordinated hydrographic surveys. This information is not intended for navigational purposes  
Mean lower low water (dotted) line and mean high water (solid) line compiled by NOS from tide-coordinated aerial photographs  
Polyconic projection. 1927 North American Datum  
10,000-foot grid ticks based on Washington coordinate system, north zone  
1000-meter Universal Transverse Mercator grid, zone 10  
To place on the predicted North American Datum 1983 move the projection lines 24 meters north and 95 meters east as shown by dashed corner ticks  
There may be private inholdings within the boundaries of the National or State reservations shown on this map  
Revision shown in purple and woodland compiled from aerial photographs taken 1961 and other sources  
Partial field check by U.S. Forest Service  
Map edited 1985

HYDROGRAPHIC SURVEY INDEX

| Survey Number | Survey Date | Survey Scale | Survey Line Spacing (Naut. Miles) |
|---------------|-------------|--------------|-----------------------------------|
| H-8927        | 1967        | 1:20,000     | 05-10                             |
| H-8928        | 1967        | 1:10,000     | 01-30                             |

HYDROGRAPHIC SURVEY INFORMATION

TYLER PEAK 1:62 500 1379.1

SCALE 1:24,000

1000 0 1000 2000 3000 4000 5000 6000 7000 FEET

1 5 0 1 KILOMETER

CONTOUR INTERVAL 40 FEET  
SUPPLEMENTARY CONTOUR INTERVAL 20 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
BATHYMETRIC CONTOUR INTERVAL 2 METERS  
DATUM IS MEAN LOWER LOW WATER  
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE  
THE MEAN RANGE OF TIDE IS APPROXIMATELY 1.5 METERS

WASHINGTON

QUADRANGLE LOCATION

UTM GRID AND 1985 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

0°03' 1 MIL  
21° 373 MILS

ROAD CLASSIFICATION

Medium-duty Light-duty

Unimproved dirt

U.S. Route State Route

SEQUIM, WASH.  
48123-A1-TF-024  
PHOTOREVISED 1985  
1956  
BATHYMETRY ADDED 1980  
DMA 1380 II SE-SERIES Y891

USGS NMN HISTORICAL

MAY 2 1986

REC'D FILE COPY