


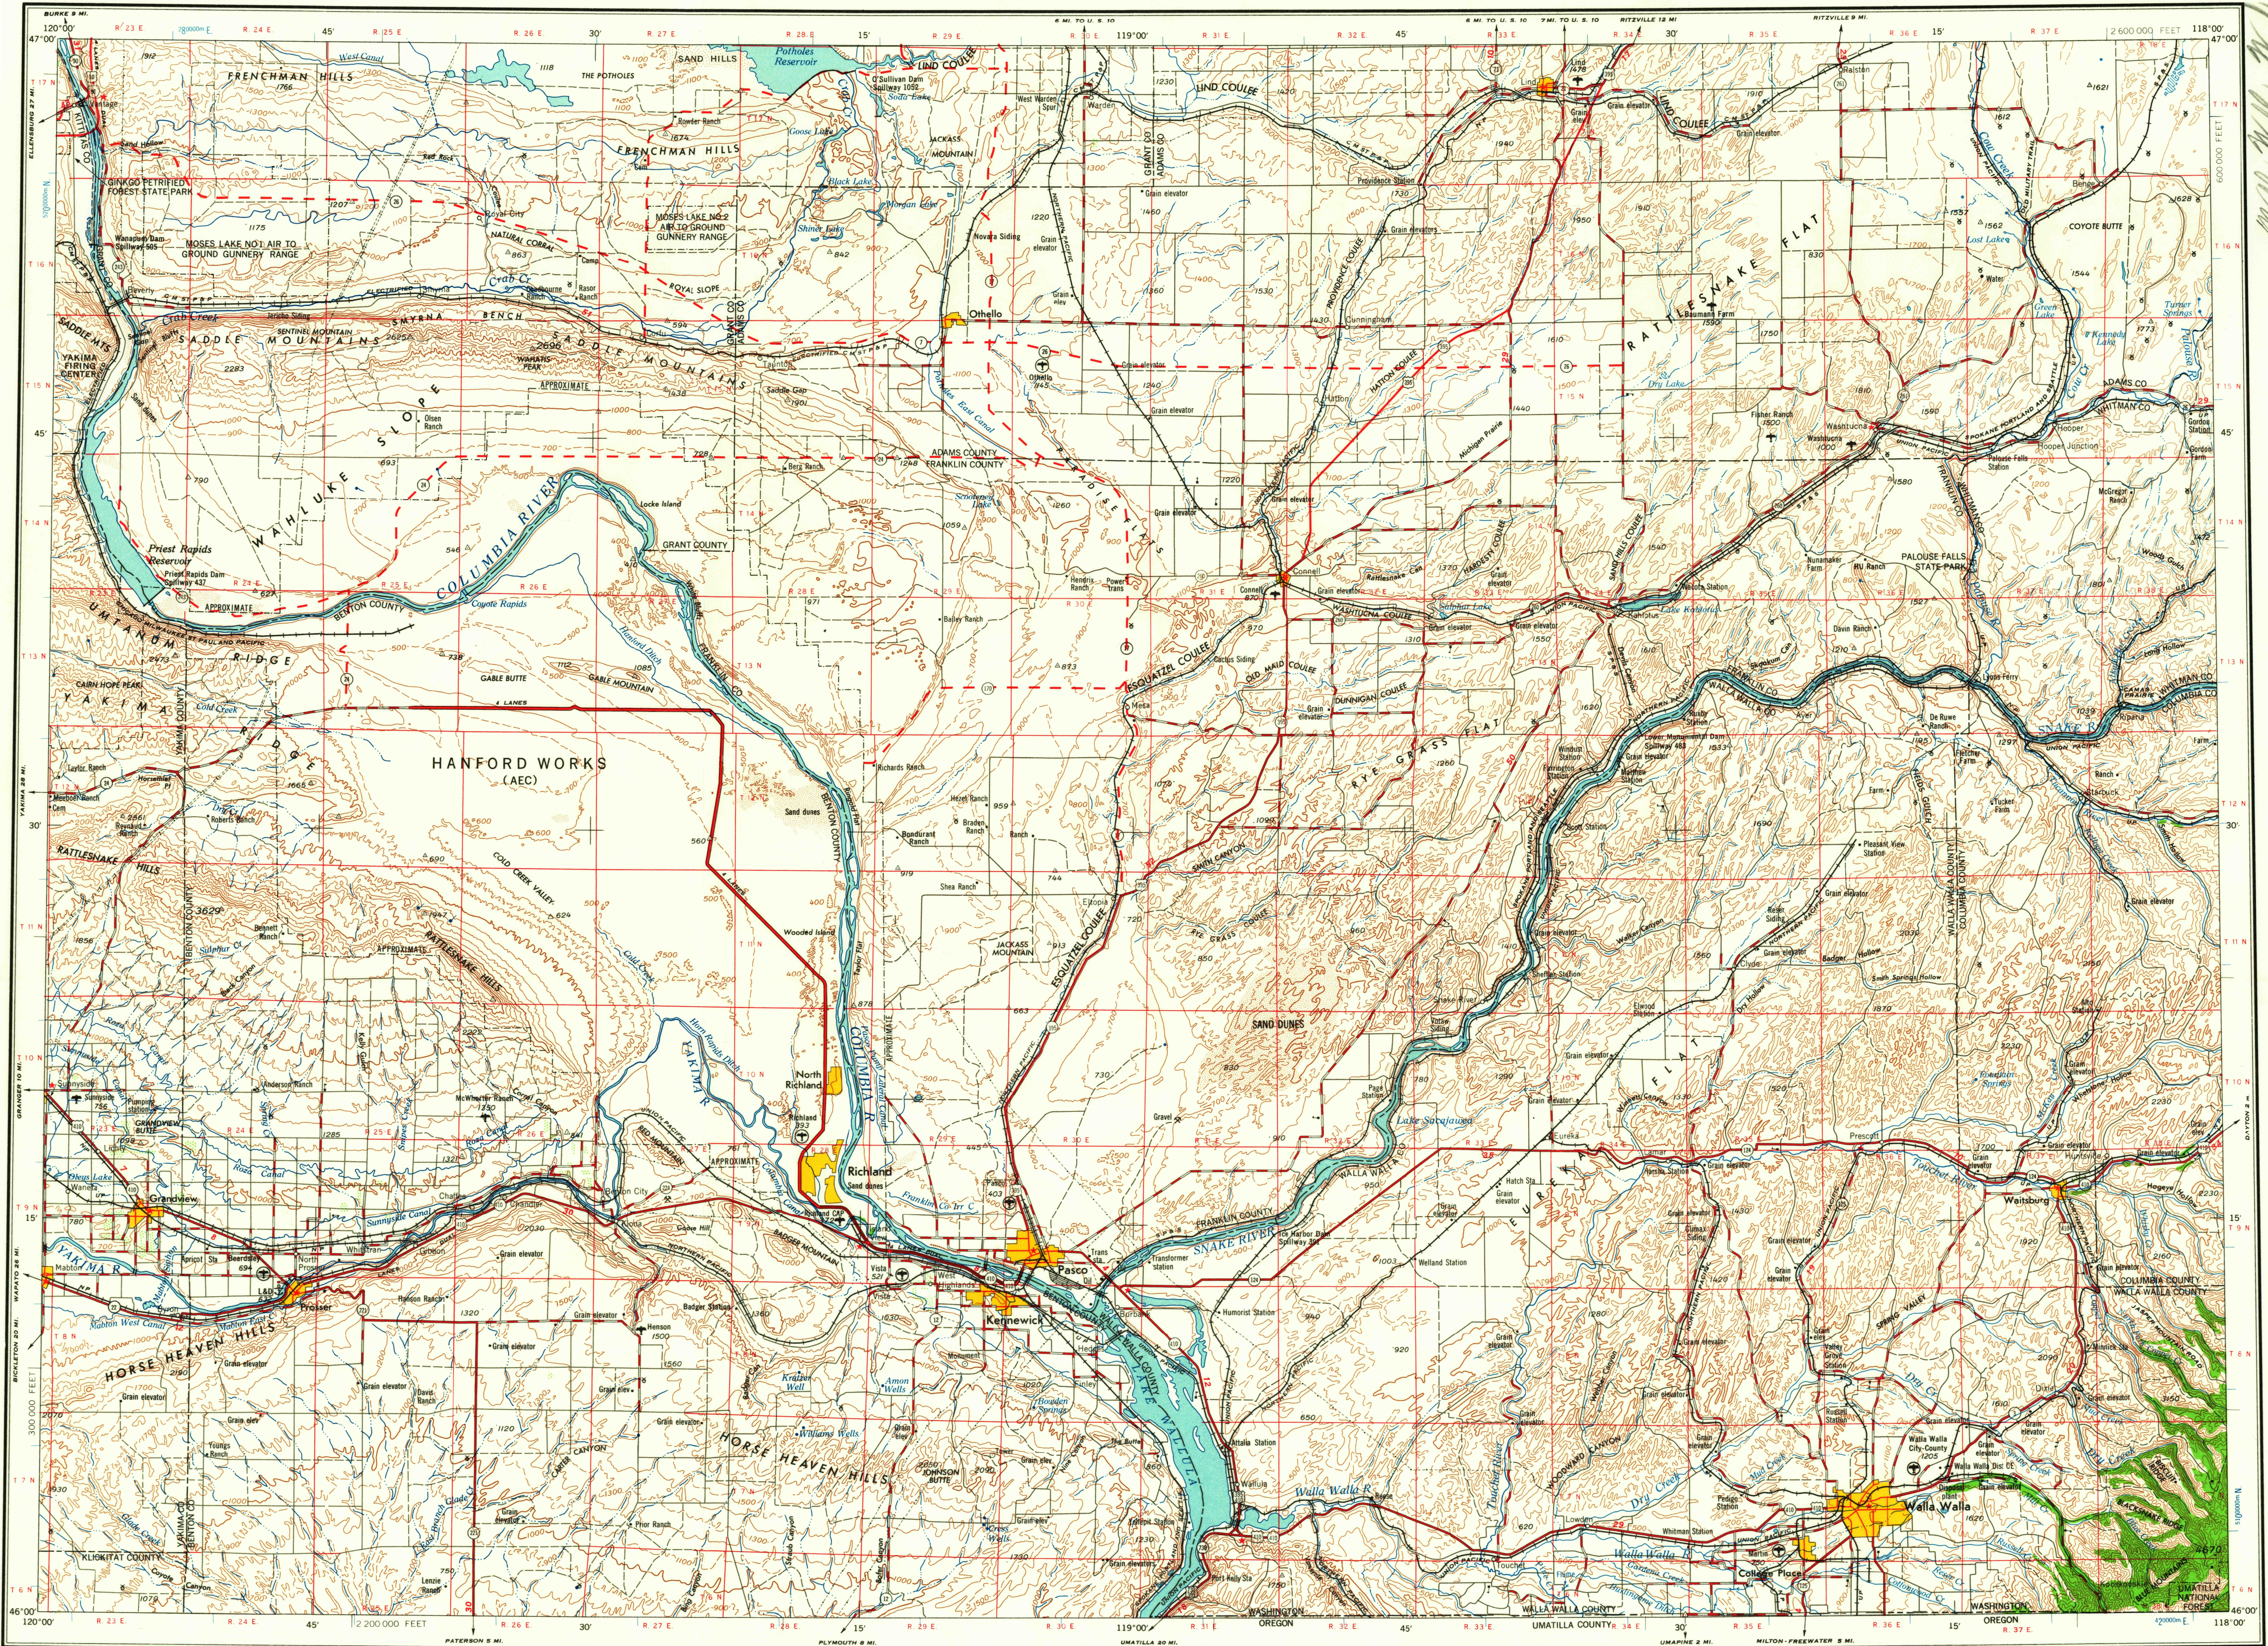

Prepared by the Army Map Service (KCS), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1956 by photogrammetric methods and from USGS and AMS quadrangles, 1:50,000 and 1:62,500, 1948-51. Horizontal and vertical control by USGS, USC&GS and USCE. Planimetric detail revised by photogrammetric methods. Photography field annotated 1953. Limited revision by U.S. Geological Survey 1963.

100,000-foot grid based on Washington coordinate system, south zone 10,000-meter Universal Transverse Mercator grid ticks, zone 11, shown in blue

LEGEND

ROAD DATA 1953 PARTIALLY REVISED 1963
Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

RAILROADS

Standard gauge
Narrow gauge
International
State
County
Park or reservation

BOUNDARIES

State
County
Park or reservation

Landmarks: School; Church; Other...

Contours

Contour interval 200 feet
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS
TRANSVERSE MERCATOR PROJECTION

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 21°00' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 20°30' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°00' WESTERLY

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER 25, COLORADO OR WASHINGTON 25, D.C.

LOCATION DIAGRAM FOR NL 11-4

RELIABILITY DIAGRAM

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

WALLA WALLA, WASHINGTON; OREGON

1953

Walla Walla, Wash.
March 23, 1964

USGS
Historical File
Topographic Division

3605