

NO SCALE
30°52'30"

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


STATE OF GEORGIA
DEPARTMENT OF NATURAL RESOURCES
EARTH AND WATER DIVISION

HARRIETTS BLUFF QUADRANGLE
GEORGIA—CAMDEN CO.
7.5 MINUTE SERIES ORTHOPHOTOMAP
(TOPOGRAPHIC—BATHYMETRIC)

30°52'30"
CUMBERLAND ISLAND NORTH




CONVERSION
SCALES

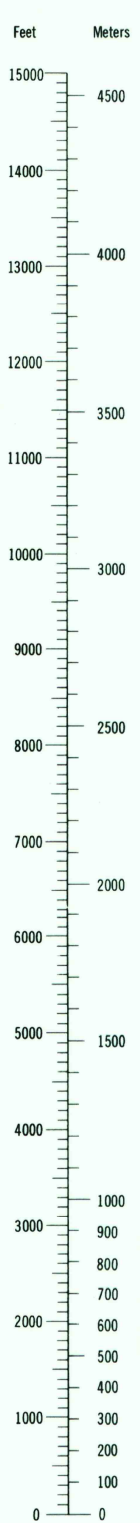

Feet	Meters
1	0.3048
2	0.6096
3	0.9144
4	1.2192
5	1.5240
6	1.8288
7	2.1336
8	2.4384
9	2.7432
10	3.0480


To convert feet to meters
multiply by 0.3048
To convert meters to feet
multiply by 3.2808

1. Dryland
2. Wetlands (May be partially submerged at mean high tide)
3. Exposed at mean low tide




30°52'30"
CUMBERLAND ISLAND NORTH

Produced by the United States Geological Survey and the National Ocean Service
Control by USGS, NOS/NOAA, and USCE
Orthophotomaps prepared by the Geological Survey from aerial photographs taken April 19, 1974. Topography by planimetry surveys 1958, revised from aerial photographs taken 1974. Field checked 1975. Map edited 1980.
Bathymetry compiled by the National Ocean Service from tide-coordinated hydrographic surveys.
Soundings compiled from NOS 11503 and 11504. This information is not intended for navigational purposes.
Mean lower low water (dotted line) and mean high water (solid line) compiled by NOS from tide-coordinated aerial photographs.
Apparent shoreline (outer edge of vegetation) shown by photomaps.
Projection and 10,000-foot grid ticks: Georgia coordinate system, east zone (transverse Mercator) 1900-meter Universal Transverse Mercator grid, zone 17 1927 North American Datum.
To place on the predicted North American Datum 1983, move the projection lines 21 meters south and 17 meters west as shown by dashed corner ticks.
There may be private inholdings within the boundaries of the National or State reservations shown on this map.

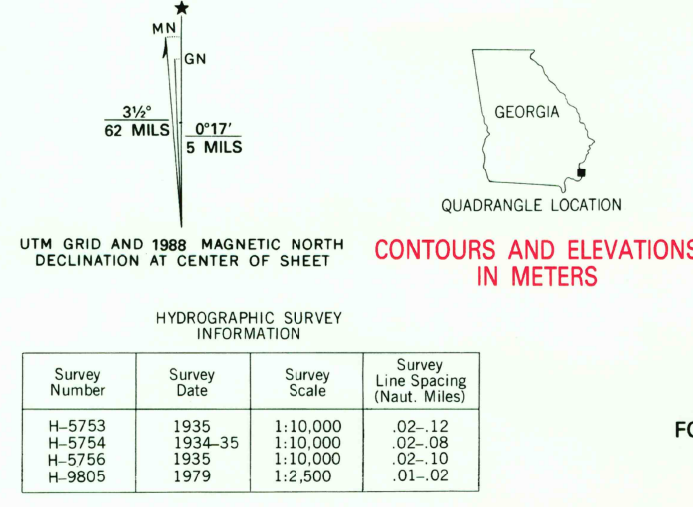

SCALE 1:24 000
CONTOUR INTERVAL 1.5 METERS
NATIONAL GEODETIC VERTICAL DATUM OF 1929
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY 0.5 METER CONTOURS - SOUNDINGS IN METERS
DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS AND/OR STANDARDS USED AT THE DATE OF THE SURVEY
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

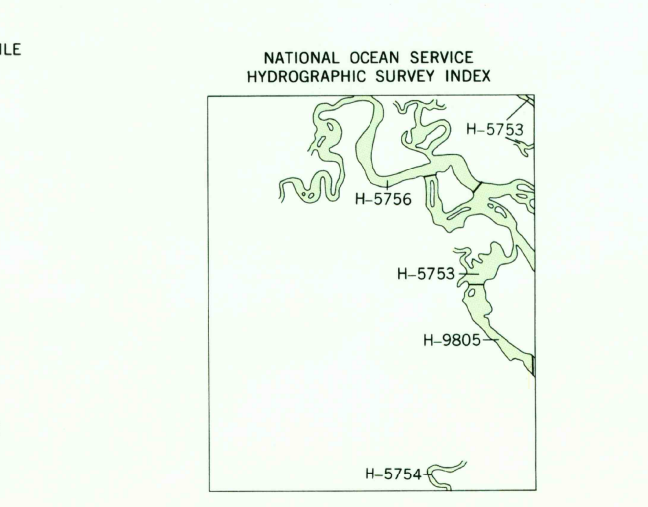

ROAD CLASSIFICATION
Primary highway, hard surface
Secondary highway, hard surface
Trails
Interstate Route
U. S. Route
State Route
Light duty road, hard or improved surface
Unimproved road
HARRIETTS BLUFF, GA.
30081-G5-QM-024
1980
PHOTOREVISED 1988
DMA 46451 SE-SERIES V8450

USGS NMD HISTORICAL MAP
FEB 23 1989
REC'D FILE COPY