


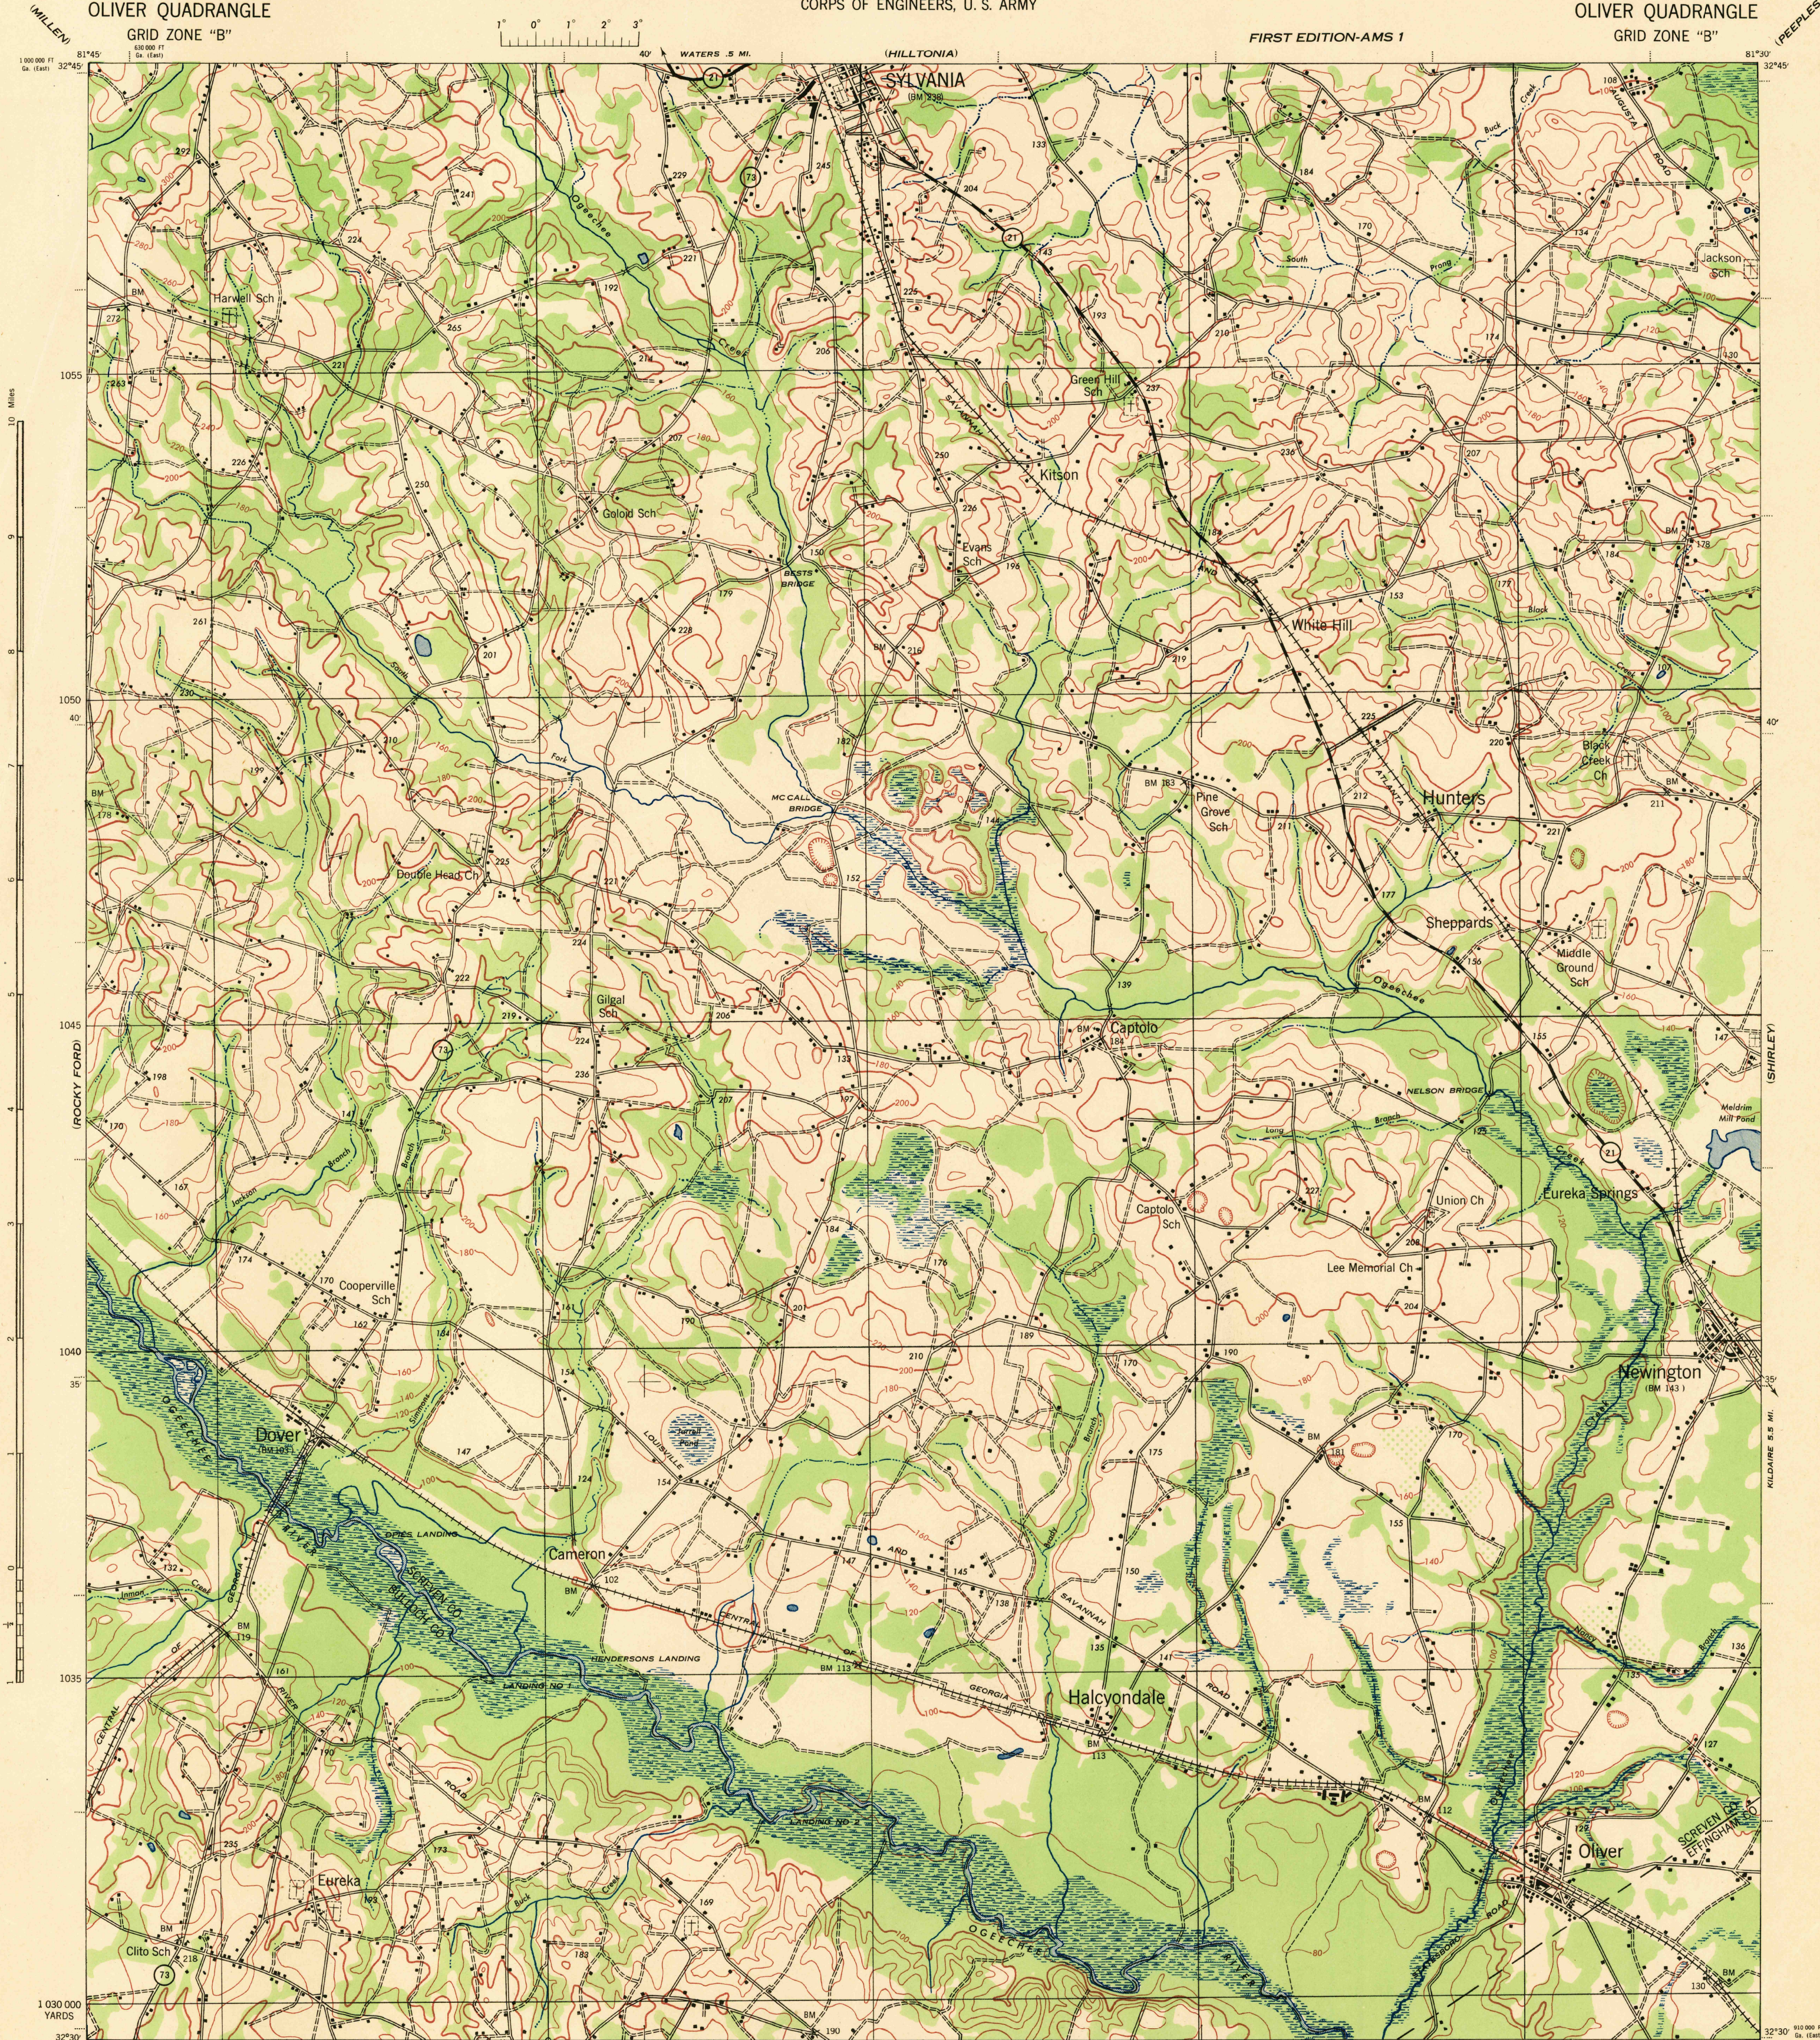

First Edition 1943
Prepared under the direction of the Chief of Engineers, U. S. Army.
Army Map Service, Quincy unit.
Based on U. S. G. S. quadrangle, Oliver, 1:62,500 (1920).
Control by U. S. G. S.
Surveyed by U. S. G. S. 1918.
Revised from single lens vertical aerial photographs.
Aerial photography: A. A. Department of Agriculture, 1941.
1942 Road data.
Polyconic Projection, North American Datum 1927.

H-15 ROAD CLASSIFICATION 1942
Dependable hard-surface, heavy-duty road. Loose-surface graded, dry weather road. U. S. Route 160
Secondary, hard-surface, all-weather road. Dirt road. State Route 30
More than two lanes indicated by note along road with tick at point of change. 3 LANE 1 4 LANE

Scale 1:62,500
FIVE THOUSAND YARD GRID COMPUTED FROM "GRID SYSTEM FOR PROGRESSIVE MAPS IN THE U. S. ZONE II, U. S. G. S. SPECIAL PUBLICATION NO. 58"
THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED
THE STATE GRIDS ARE INDICATED AT 10,000 FOOT INTERVALS
NOTE: OFFICIALS USING THIS MAP WILL BE RESPONSIBLE FOR CORRECTIONS AND ADDITIONS WHICH OWE TO NEW INFORMATION AND NOT TO THE CHIEF OF ENGINEERS, WASHINGTON, D. C.

APPROXIMATE MEAN DECLINATION 1943
FOR CENTER OF SHEET
ANNUAL MAGNETIC CHANGE 1" INCREASE
Use diagram only to obtain numerical values. To determine magnetic north line, connect the pivot point "P" on the south edge of the map with the value of the angle between grid and magnetic north, or plotted on the degree scale at the north edge of the map.

USGS
Historical File
Topographic Division

FILE COPY
Inspector and Editor

OLIVER, GA.
N3230-W8130/15

USGS 15 1918