



V501, EDITION 4
Prepared by the U.S. Army Topographic Command (HYND), Washington, D.C. Compiled in 1957 by photogrammetric methods and from United States quadrangles, 1:25,000 and 1:50,000, 1913-42. Planimetry revised from aerial photographs taken 1952-55. Map field checked 1957. Revised by the U.S. Geological Survey 1969.
Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram

LEGEND

POPULATED PLACES

- Over 500,000
- 100,000 to 500,000
- 25,000 to 100,000
- 5,000 to 25,000
- 1,000 to 5,000
- Less than 1,000

ROADS

- Primary, all-weather, hard surface
- Secondary, all-weather, hard surface
- Light-duty, all-weather, hard or improved surface
- Fair or dry weather, unimproved surface
- Trail
- Interchange
- Bar Harbor
- Fishkill

RAILROADS

- Standard gauge
- Narrow gauge
- Landplane airport
- Landing area
- Seaplane airport
- Orchard
- Park or reservation
- Woods-brushwood

BOUNDARIES

- National
- State
- County

Other

- Mine
- Landmark: School, Church, Other
- Spot elevation in feet
- Marsh or swamp
- Intermittent or dry stream
- Power line


Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles

0 5 10 15 20 25 30 Kilometers

0 5 10 15 20 25 30 Nautical Miles

CONTOUR INTERVAL 50 FEET
WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS
TRANSVERSE MERCATOR PROJECTION
BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 17
1985 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 14° (10 MILES WESTERLY FOR THE CENTER OF THE WEST EDGE TO 21° (40 MILES WESTERLY FOR THE CENTER OF THE EAST EDGE)
FOR SALE BY U.S. GEOLOGICAL SURVEY, WASHINGTON, D.C. 20242

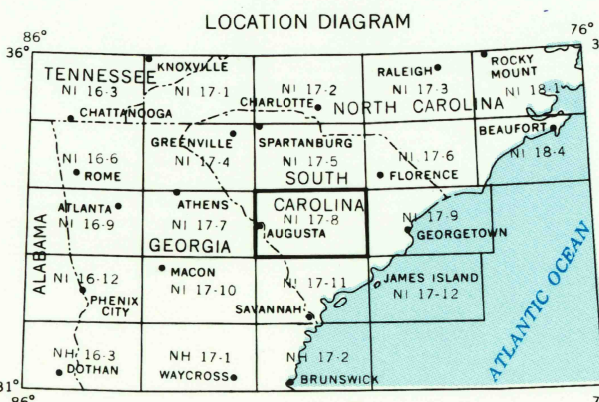

GRID ZONE DESIGNATION

17S

100,000 M. SQUARE IDENTIFICATION

MH	NH
MG	NG

TO GIVE A STANDARD REFERENCE TO THIS SHEET TO NEAREST 100 METERS

SAMPLE POINT LOOKOUT TOWER

TO GIVE A STANDARD REFERENCE TO THIS SHEET TO NEAREST 100 METERS

SAMPLE REFERENCE

17S000000

APR 10 1984

AUGUSTA, GEORGIA; SOUTH CAROLINA

1957
REVISED 1969