WESTERN UNITED STATES 1:250,000

CEDAR CITY

EDITION 3

NJ 12-7
SERIES V502

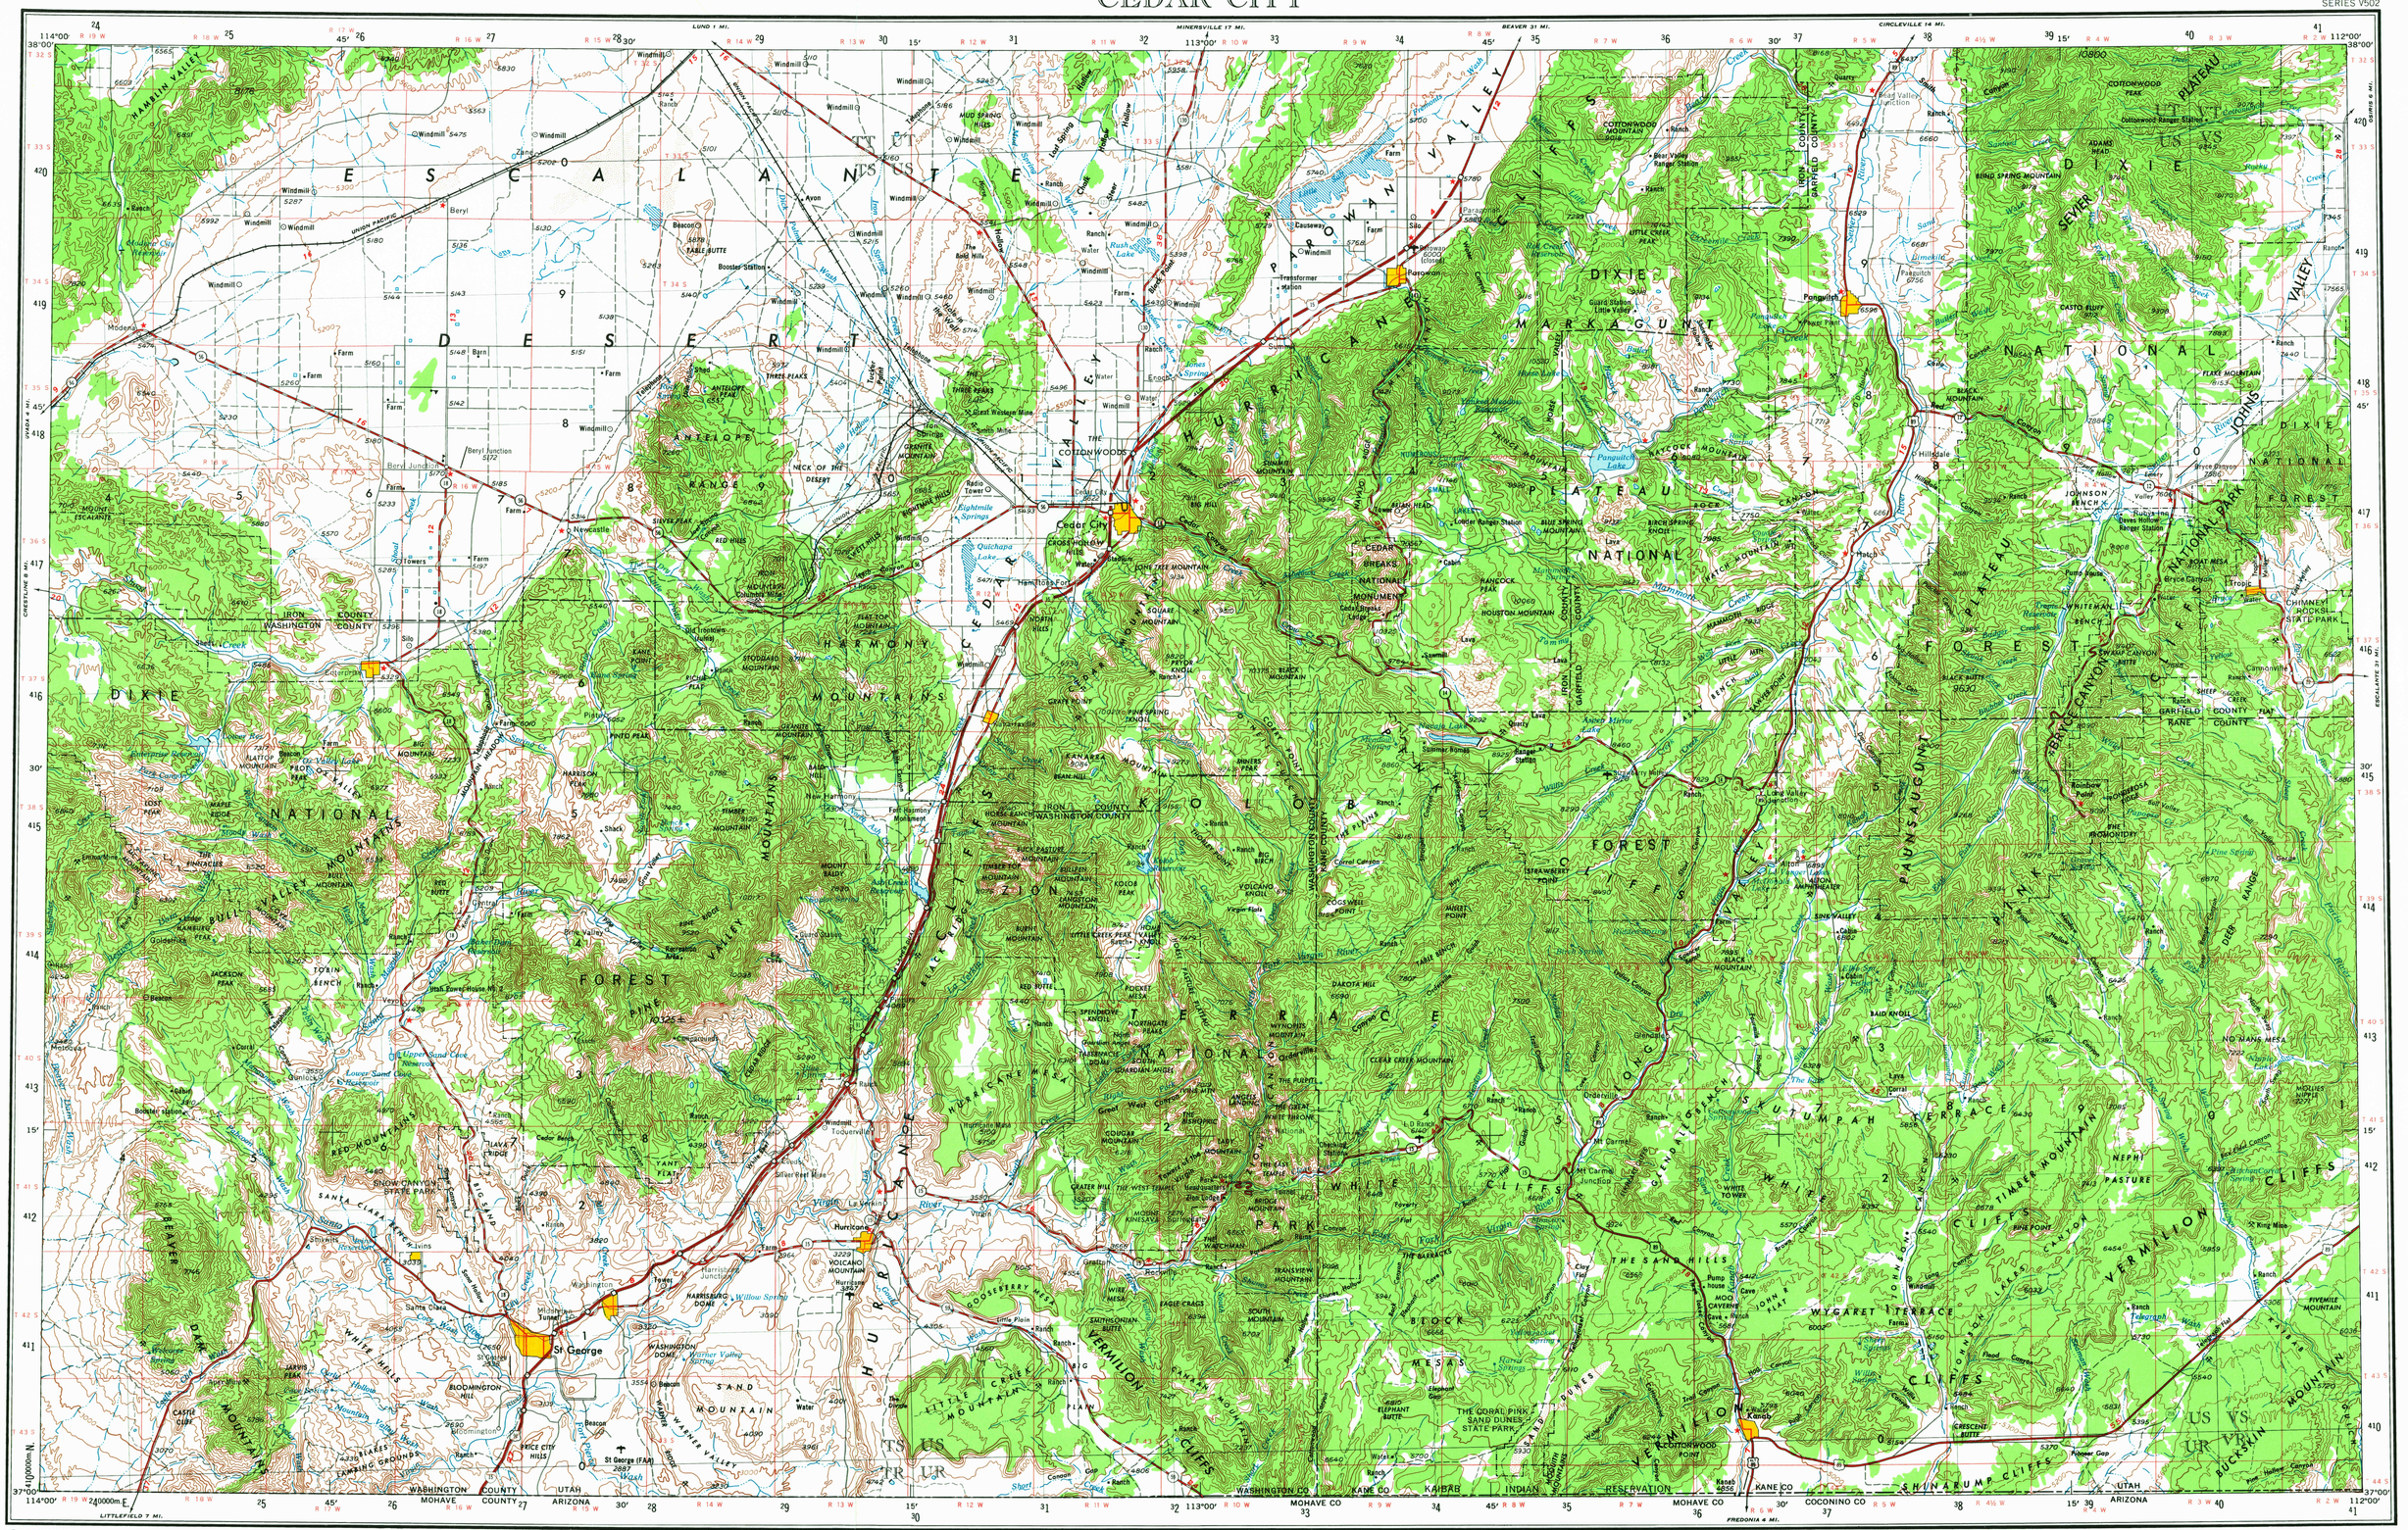

V502, EDITION 3

Prepared by the U.S. Army Topographic Command (FSGE), Washington, D.C. Compiled in 1955 by photogrammetric methods and from United States quadrangles, 1:24,000, 1:31,680, and 1:62,500, 1931-52. Planimetry revised from aerial photographs taken 1953. Photographs field annotated 1953. Revised in 1971 by the U.S. Geological Survey from aerial photographs taken 1968-1971.

Location of Geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES
Over 500,000 — LOS ANGELES
100,000 to 500,000 — OMAHA
25,000 to 100,000 — GALVESTON
5,000 to 25,000 — Laramie
1,000 to 5,000 — Grand Coulee
Less than 1,000 — Sun Valley

RAILROADS
Standard gauge (Single track, Double or Multiple)
Narrow gauge

BOUNDARIES
International
State
County
Park or reservation

ROADS
Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, hard or improved surface
Fair or dry weather, unimproved surface
Trail
Interchange
Route markers: Interstate, U.S., State (15) (70) (191)

Landplane airport
Landing area
Seaplane airport
Seaplane anchorage
Woods-brushwood

Landmarks: School; Church; Other
Mine
Spot elevation in feet 22'
Marsh or swamp
Intermittent or dry stream
Power line

Scale 1:250,000

5 0 5 10 15 20 Statute Miles
5 0 5 10 15 20 25 30 Kilometers
5 0 5 10 15 Nautical Miles

CONTOUR INTERVAL 200 FEET
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 12

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 15½° (280 MILS) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 15° (270 MILS) EASTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR WASHINGTON, D.C. 20244

LOCATION DIAGRAM



SECTIONIZED TOWNSHIP

6	5	4	3	2	1	
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

TOWNSHIP OR RANGE LINE
LAND GRANT BOUNDARY

GRID ZONE DESIGNATION: 12S
100,000 M SQUARE IDENTIFICATION: TT UT VT / TS US VS / TR UR VR

IGNORE the SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figures of the grid number, example: 410000

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: HATCH

1. Read letters identifying 100,000 meter square in which the point lies:
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself: Estimate tenths from grid line to point:
3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself: Estimate tenths from grid line to point:

SAMPLE REFERENCE: US7368
If reporting beyond 18° in any direction, prefix Grid Zone Designation, as: 12SUS7368

USGS
Historical File
Topographic Division

CEDAR CITY, UTAH
1953
REVISED 1971

STOCK NO. V502XNJ127***03

6-24-74
18000
JUN
1