


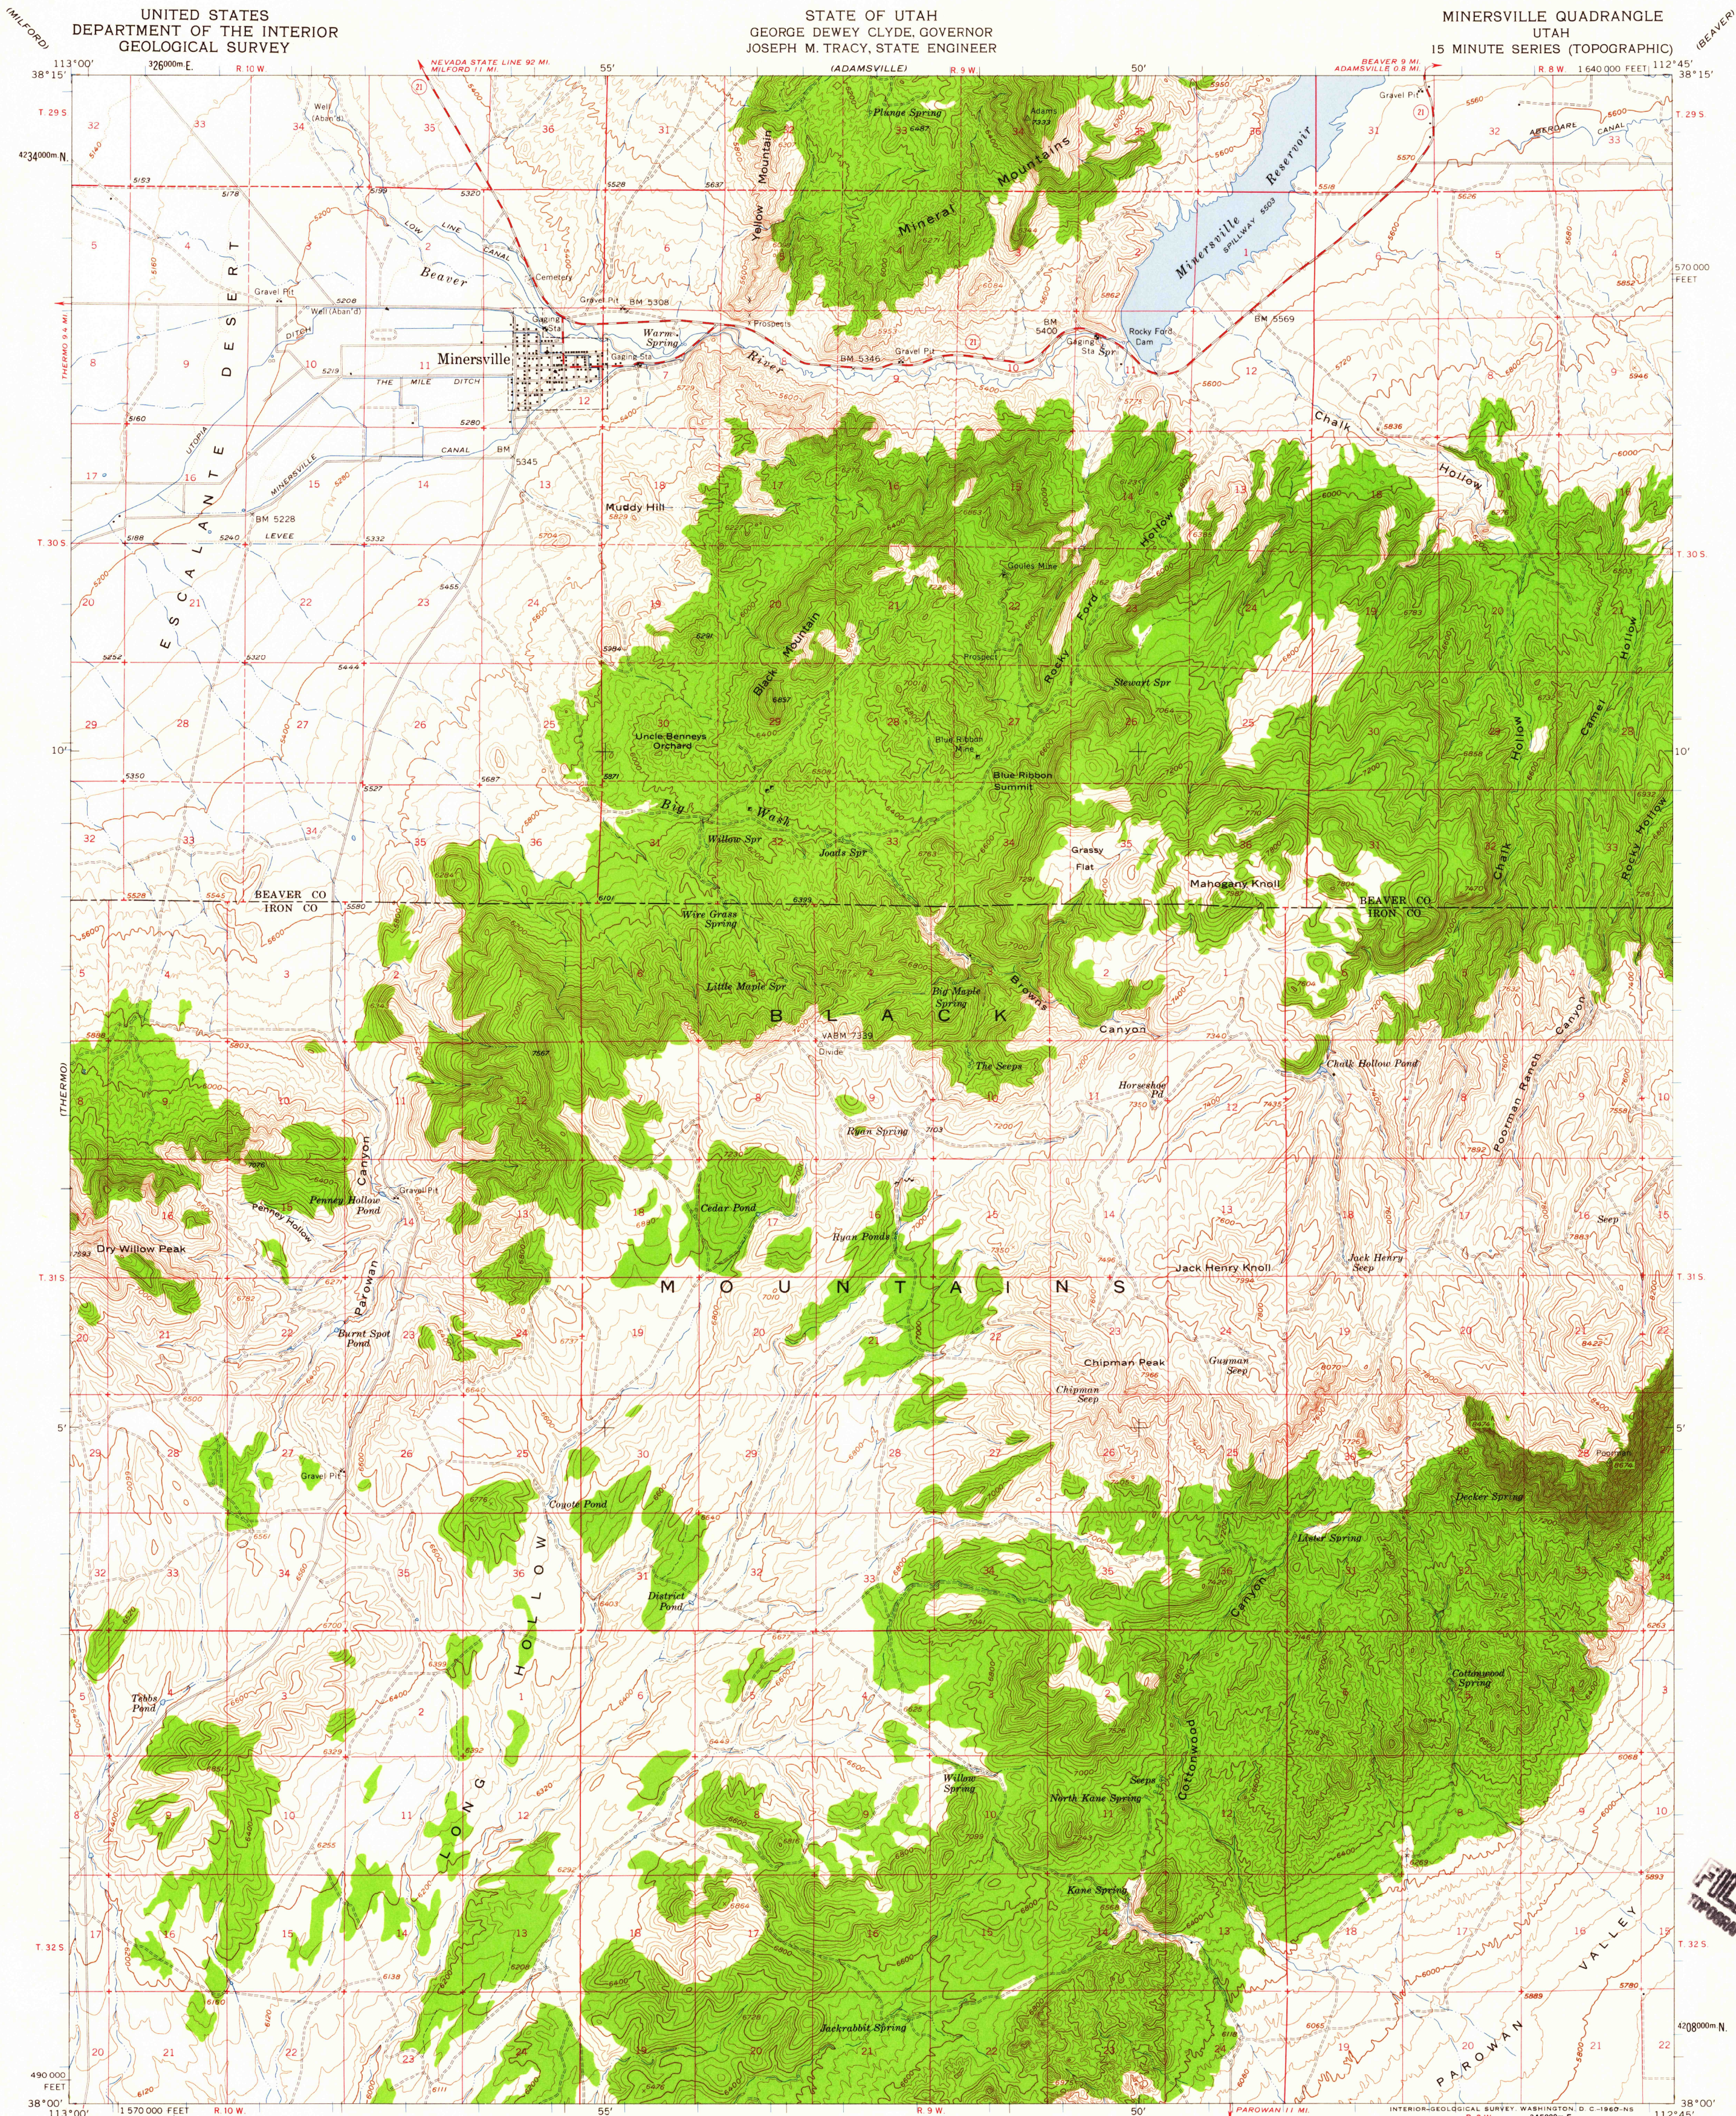

Mapped, edited, and published by the Geological Survey
Control by USGS and USC&GS
Topography by planetable surveys 1953 and by
photogrammetric methods from aerial photographs
taken 1951, 1953, and 1955. Field check 1958
Polyconic projection. 1927 North American datum
10,000-foot grid based on Utah coordinate system,
south zone
1000-meter Universal Transverse Mercator grid ticks,
zone 12, shown in blue
Dashed land lines indicate approximate locations
Unchecked elevations are shown in brown

TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN
DECLINATION, 1958

SCALE 1:62,500
1 2 3 4 MILES
3000 0 3000 6000 9000 12000 15000 18000 21000 FEET
1 2 3 4 5 KILOMETERS
CONTOUR INTERVAL 40 FEET
DOTTED LINES REPRESENT 20-FOOT CONTOURS
DATUM IS MEAN SEA LEVEL

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER 25, COLORADO OR WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS
Historical File
Topographic Division

UTAH
QUADRANGLE LOCATION

ROAD CLASSIFICATION
Medium-duty ——— Light-duty ———
Unimproved dirt ———

State Route
The northwest quarter of this area also
covered by 1:24,000 scale map of Minersville,
7.5 minute quadrangle, surveyed 1953
MINERSVILLE, UTAH
N3800—W11245/15

1958

U.S.G.S.
FILE COPY
TOPOGRAPHIC DIVISION

MAY 17 1960

2560