


UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY



SOONER BENCH QUADRANGLE  
UTAH—KANE CO.  
7.5 MINUTE SERIES (TOPOGRAPHIC)

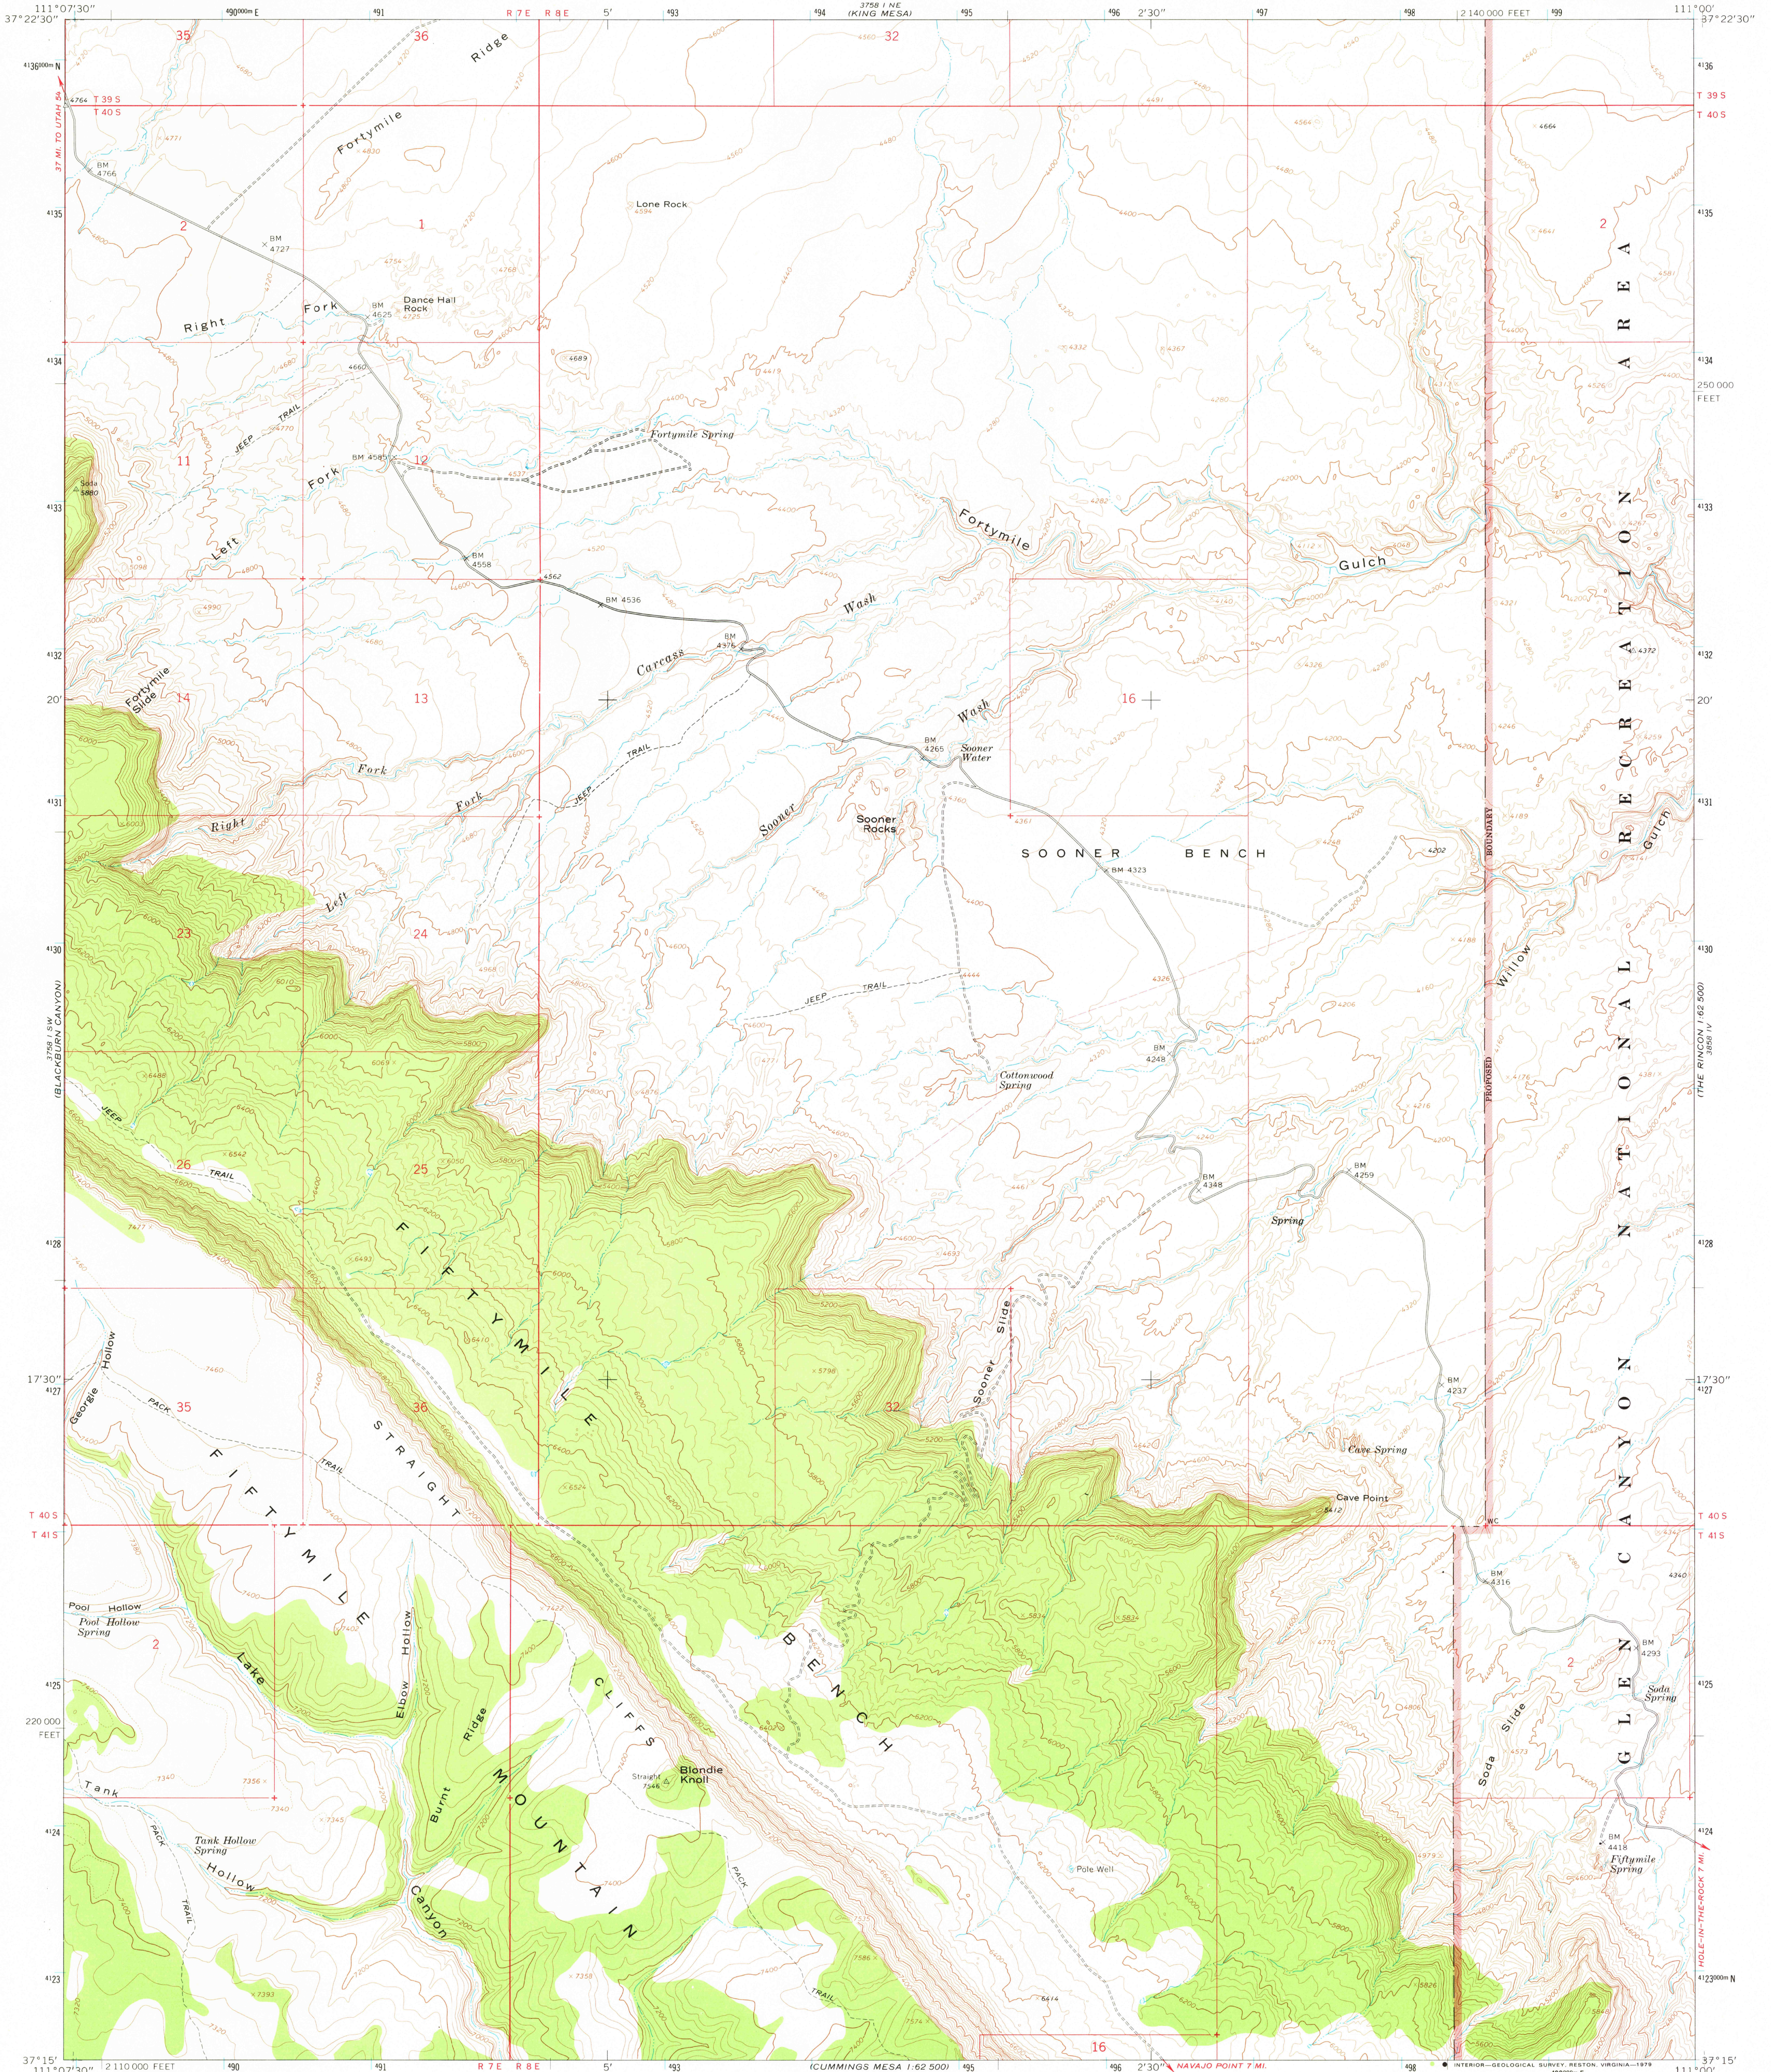

Mapped, edited, and published by the Geological Survey

Control by USGS and USC&GS

Topography by photogrammetric methods from aerial photographs taken 1967. Field checked 1968


Polyconic projection. 1927 North American datum 10,000-foot grid based on Utah coordinate system, south zone 1000-meter Universal Transverse Mercator grid ticks, zone 12, shown in blue

To place on the predicted North American Datum 1983 move the projection lines 5 meters north and 64 meters east as shown by dashed corner ticks


Fine red dashed lines indicate selected fence lines

Where omitted, land lines have not been established

There may be private inholdings within the boundaries of the National or State reservations shown on this map

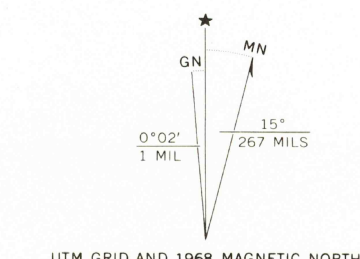

Map photoinspected 1976  
No major culture or drainage changes observed

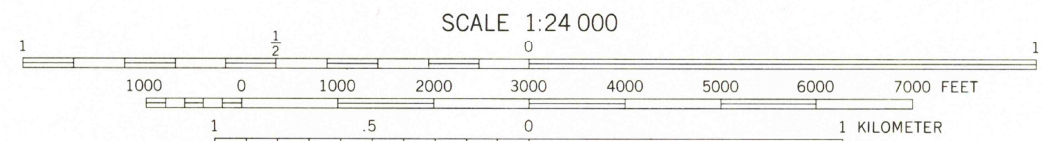

CONTOUR INTERVAL 40 FEET  
DOTTED LINES REPRESENT 20-FOOT CONTOURS  
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



QUADRANGLE LOCATION

ROAD CLASSIFICATION  
Light-duty road, all weather, Unimproved road, fair or dry improved surface weather

USGS  
Historical File  
Topographic Division

SOONER BENCH, UTAH  
N3715—W11100/7.5

1968  
PHOTOINSPECTED 1976  
DMA 3758 I SE—SERIES V697

JAN - 8 1980

NAVAJO POINT 7 MI.