


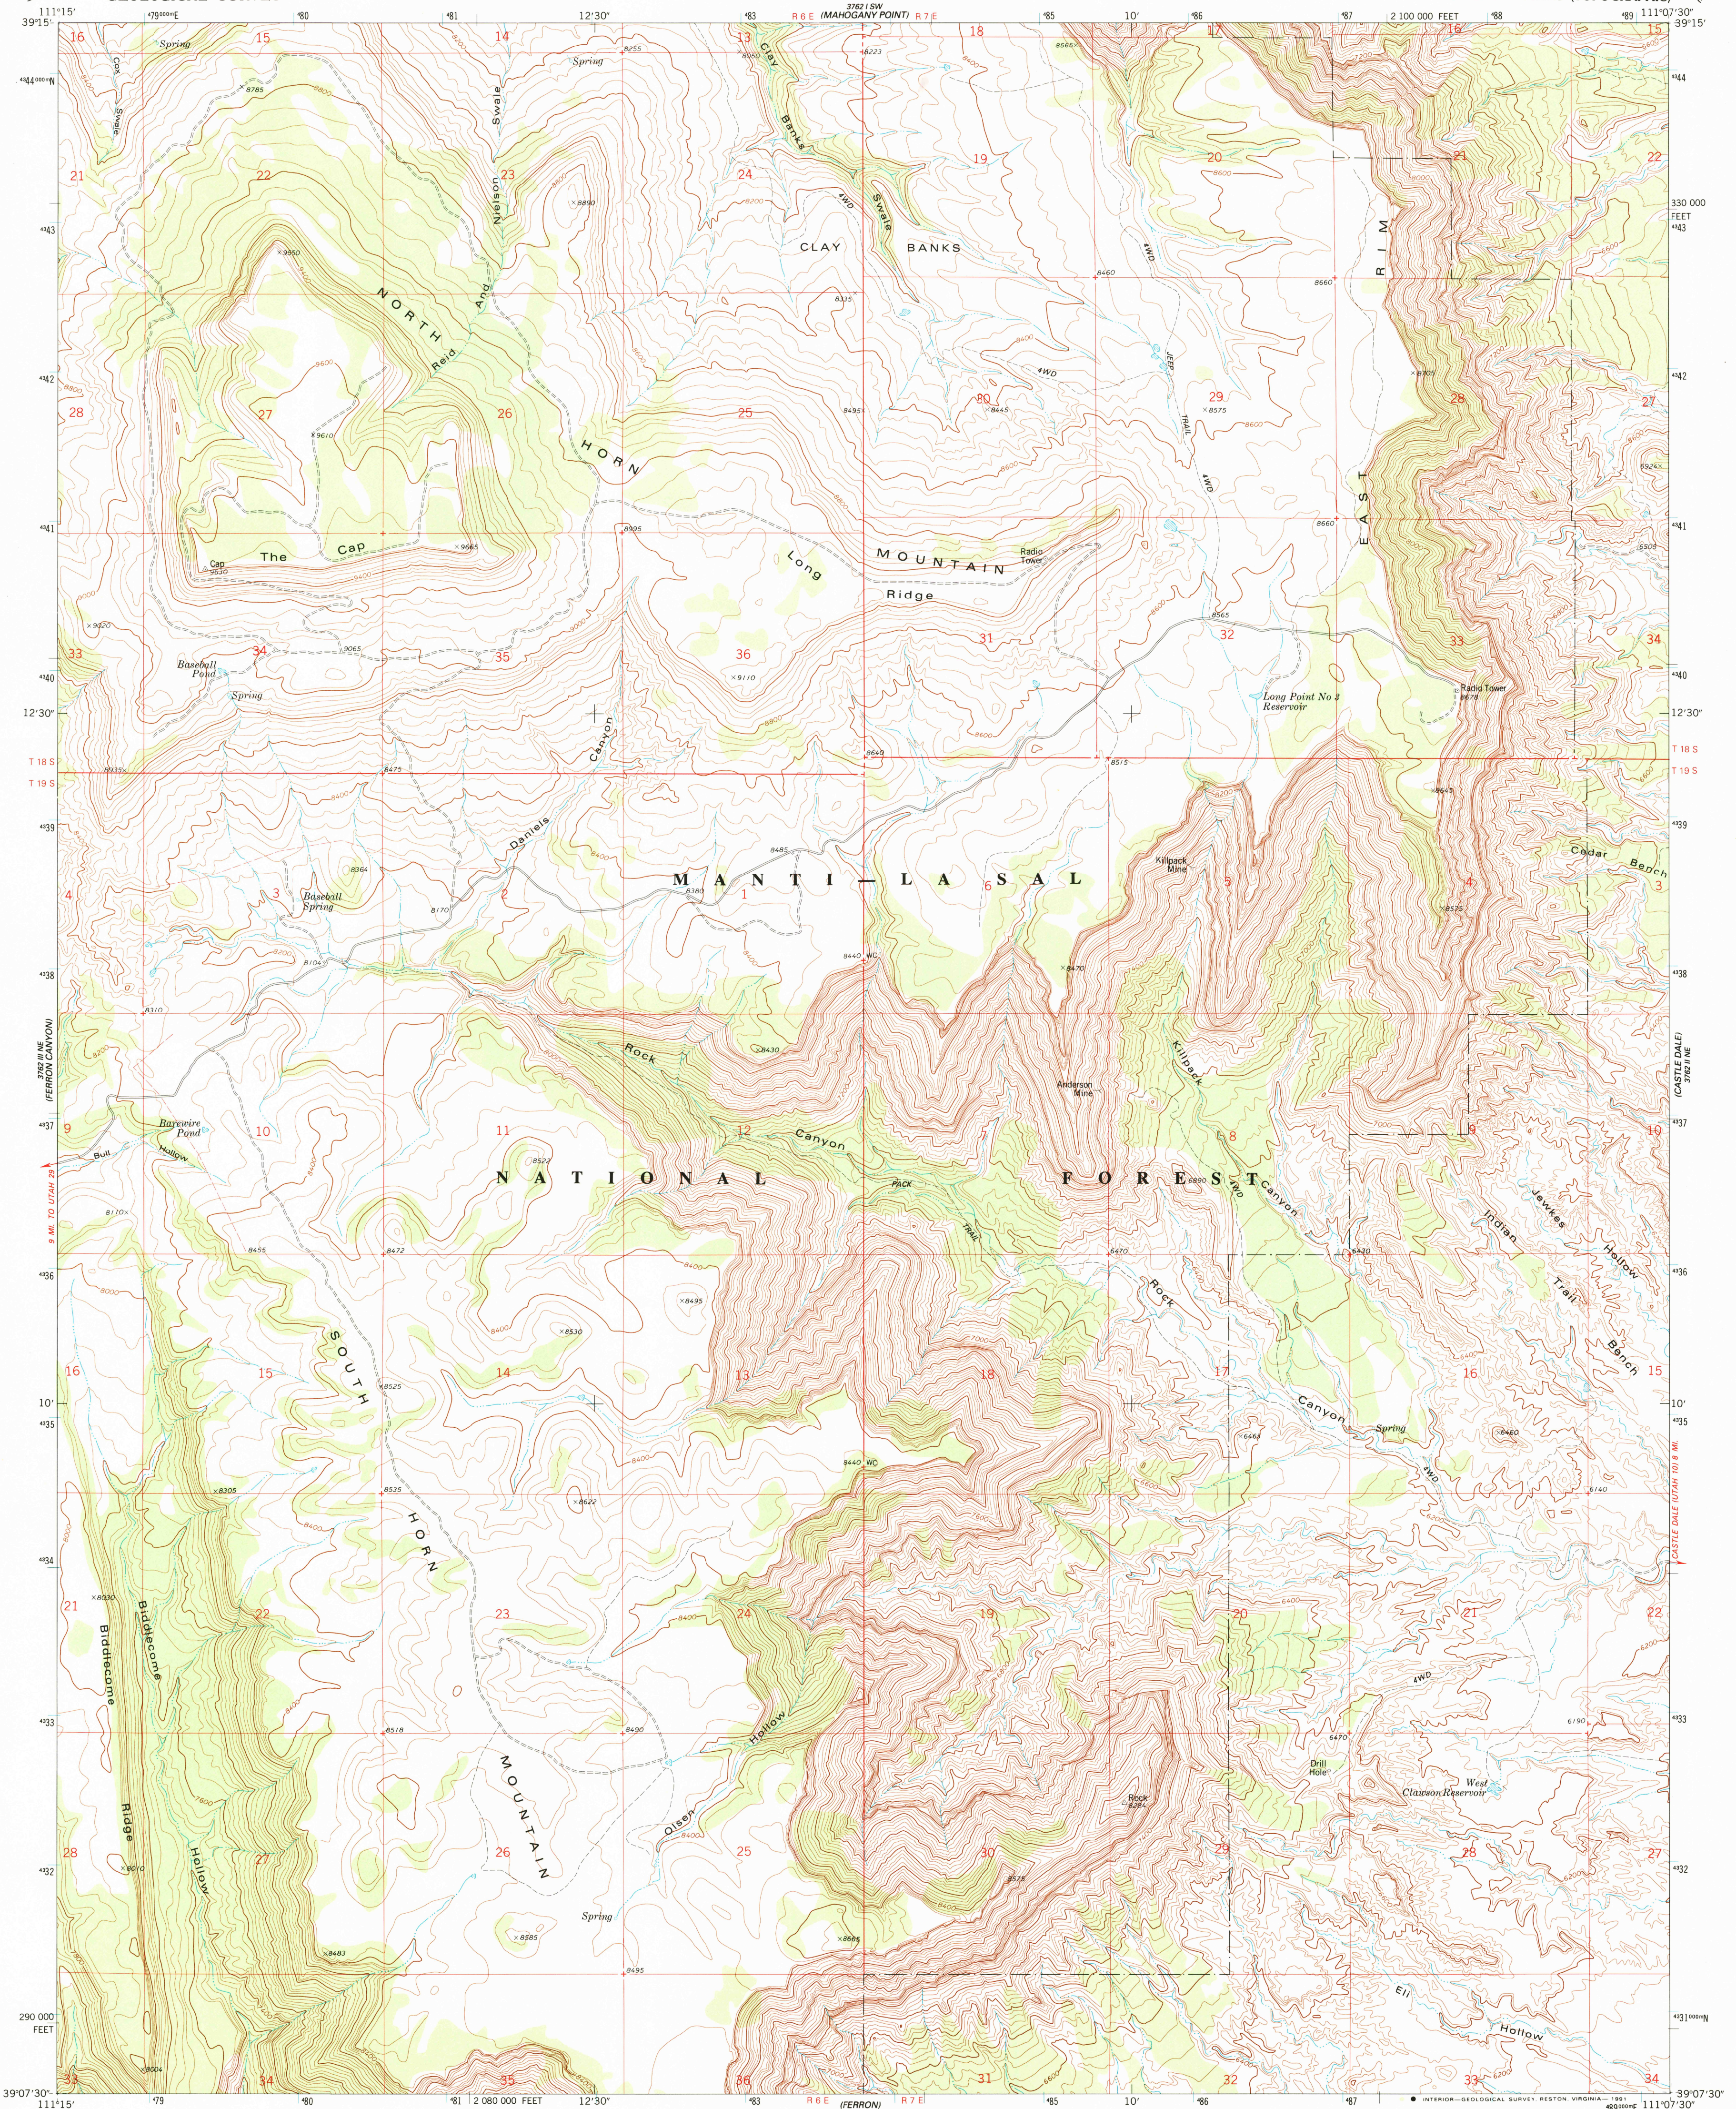

Mapped, edited, and published by the Geological Survey

Control by USGS, NOS/NOAA and U.S. Forest Service

Topography by photogrammetric methods from aerial photographs

taken 1970. Field checked 1974. Map edited 1979

Projection and 10,000-foot grid ticks: Utah coordinate system,

central zone (Lambert conformal conic)

1000-meter Universal Transverse Mercator grid ticks, zone 12,

shown in blue

The difference between 1927 North American Datum and North

American Datum of 1983 (NAD 83) for 7.5 minute intersections is



given in USGS Bulletin 1875. The NAD 83 is shown by dashed

corner ticks

Fine red dashed lines indicate selected fence lines

There may be private inholdings within the boundaries of

the National or State reservations shown on this map

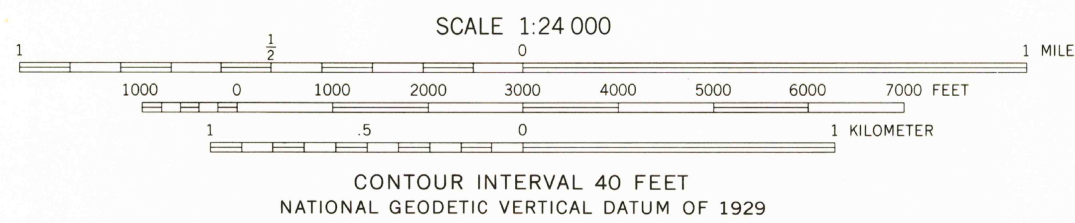


CONTOUR INTERVAL 40 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION	
Primary highway, hard surface	Light-duty road, hard or improved surface
Secondary highway, hard surface	Unimproved road
Interstate Route	U.S. Route
	State Route

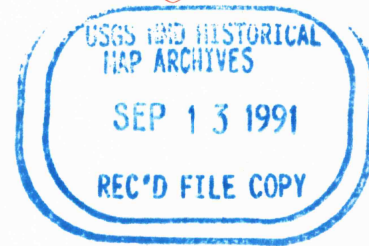

THE CAP, UTAH
39111-B2-TF-024

1979

DMA 3762 II NW-SERIES V897