




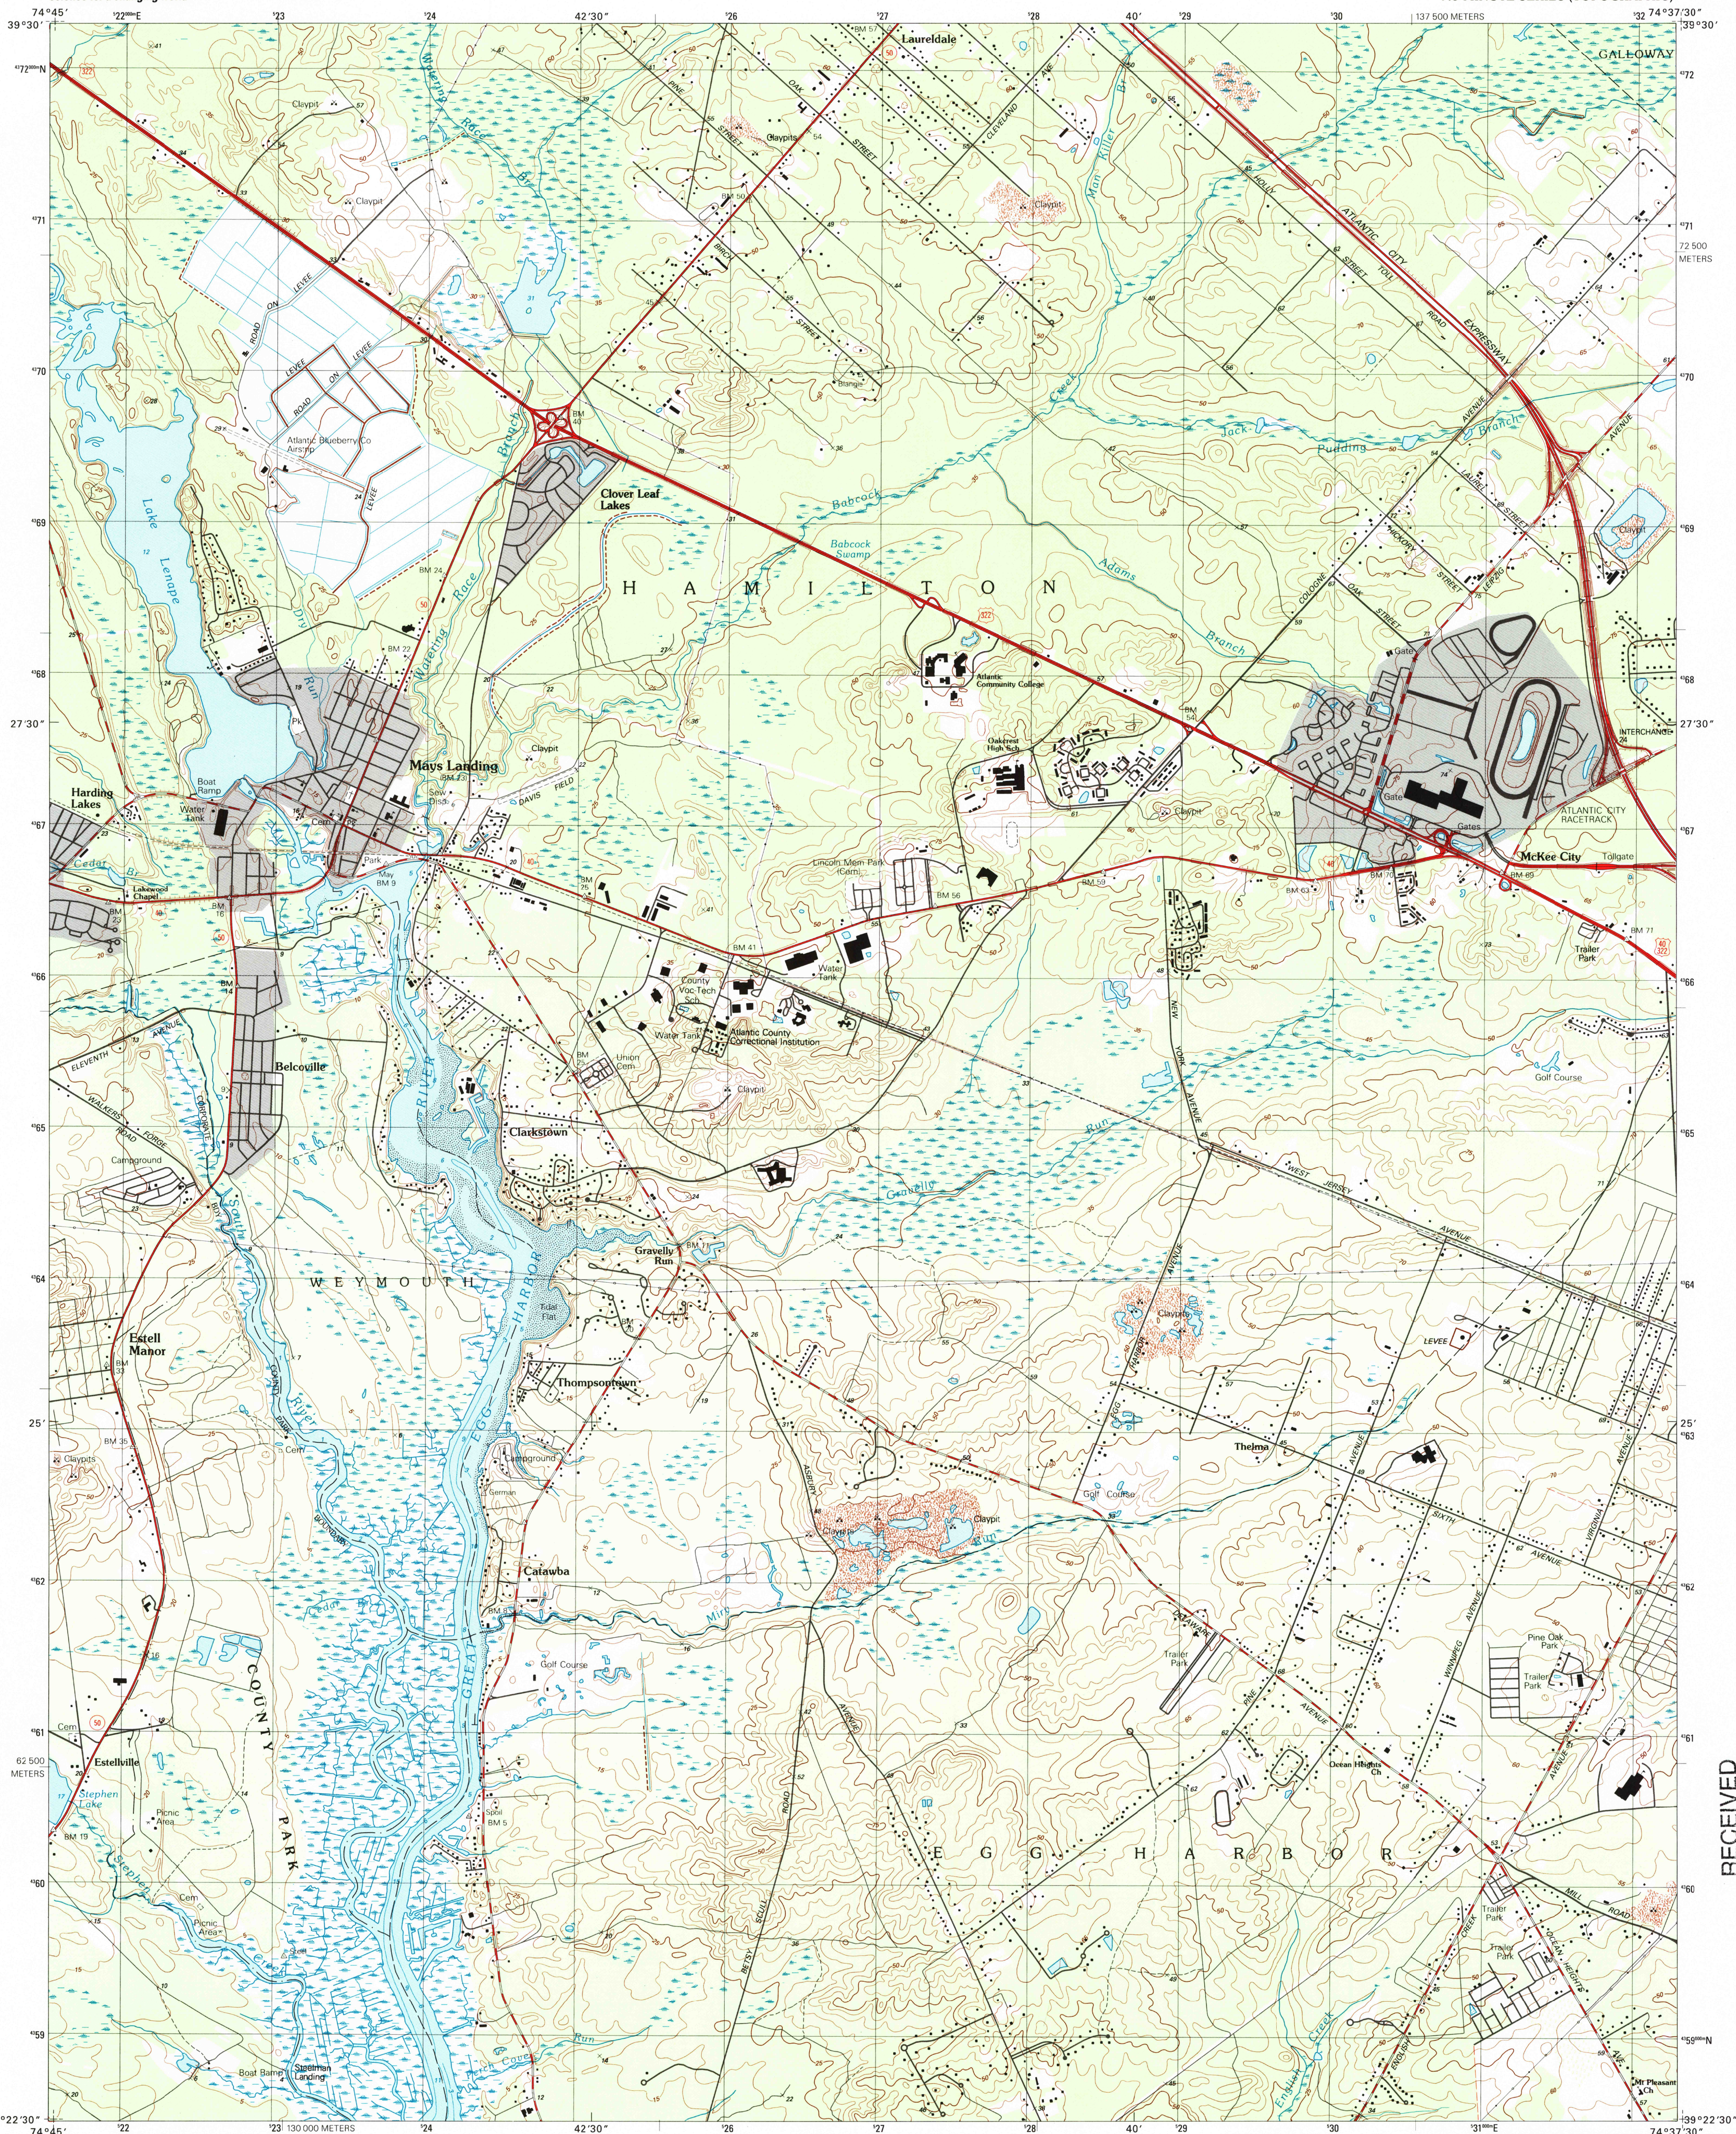

Produced by the United States Geological Survey
Topography compiled 1986. Planimetry derived from imagery taken 1995 and other sources. Survey control current as of 1982
Selected hydrographic data compiled from NOS Chart 12316 (1986)
This information is not intended for navigational purposes
North American Datum of 1983 (NAD 83). Projection and 1 000-meter grid: Universal Transverse Mercator, zone 18
2 500-meter ticks: New Jersey Coordinate System of 1983
North American Datum of 1927 (NAD 27) is shown by dashed corner ticks. The values of the shift between NAD 83 and NAD 27 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software
Landmark buildings verified 1988

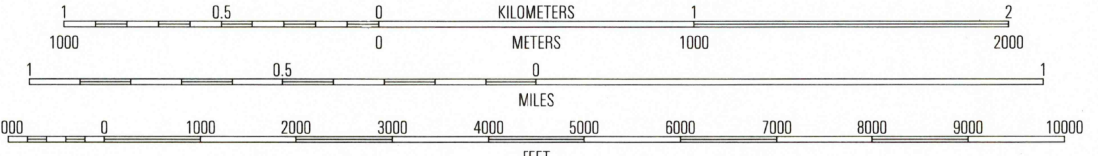

CONTOUR INTERVAL 5 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048
DEPTH CURVES AND SOUNDINGS IN FEET, DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 4 FEET



ROAD CLASSIFICATION
Primary highway
hard surface
Secondary highway
hard surface
Light-duty road, hard or
improved surface
Unimproved road

1	2	3
4	5	6
7	8	9

MAYS LANDING, NJ

1995

NIMA 6062 1 NW-SERIES V822

RECEIVED
OCT 31 2000
USGS NMU
HISTORICAL MAP ARCHIVES

