



Map by the Army Map Service
Published for civil use by the Geological Survey

Control by USC&GS, USCE, U. S. Lake Survey
and International Boundary Commission


U. S. topography from aerial photographs by photogrammetric
methods. Aerial photographs taken 1950. Field check 1951
Canadian topography from Department of National Defence,
dated 1939

Hydrography compiled from U. S. Lake Survey chart 63 (1955)

Polyconic projection. 1927 North American datum
10,000-foot grid based on Michigan coordinate system, east zone
1000-meter Universal Transverse Mercator grid ticks,
zone 16, shown in blue

Unchecked elevations are shown in brown

43°
TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN
DECLINATION, 1951

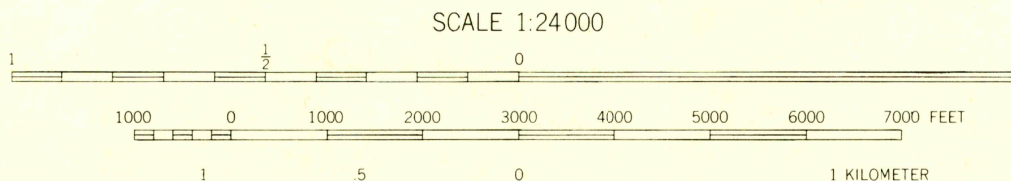

CONTOUR INTERVAL 10 FEET IN THE UNITED STATES AND 25 FEET IN CANADA
DATUM IS MEAN SEA LEVEL
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS 602 FEET

THE U. S. PORTION OF THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS
Historical File
Topographic Division



ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
○ State Route

U.S.G.S.
FILE COPY
TOPOGRAPHIC DIVISION

BRIMLEY, MICH.
NE/4 BRIMLEY 15' QUADRANGLE
N 4622.5—W 8430/7.5

1951

JUN 4 1956

JUN 4 1956

2435