




Mapped, edited, and published by the Geological Survey
Control by USGS, USC&GS, U.S. Lake Survey,
and International Boundary Commission
Topography by photogrammetric methods from aerial
photographs taken 1954-56. Field checked 1964
Selected hydrographic data compiled from U.S. Lake Survey Chart 61 (1961)
This information is not intended for navigational purposes
Polyconic projection. 1927 North American datum
10,000-foot grid based on Michigan coordinate system, east zone
1000-meter Universal Transverse Mercator grid ticks,
zone 17, shown in blue
Fine red dashed lines indicate selected fence and field lines where
generally visible on aerial photographs. This information is unchecked

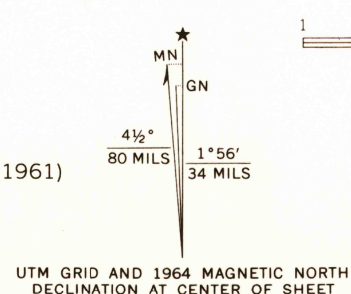

CONTOUR INTERVAL 10 FEET
DATUM IS MEAN SEA LEVEL
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS LOW WATER 578.5 FEET

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON, D. C. 20242
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
Medium-duty ——— Light-duty ———
Unimproved dirt =====

DRUMMOND, MICH.-ONT.
N4600—W8337.5/7.5

1964

AMS 4276 II SW—SERIES V862

U.S.G.S.
FILE COPY
TOPOGRAPHIC DIVISION

2980