


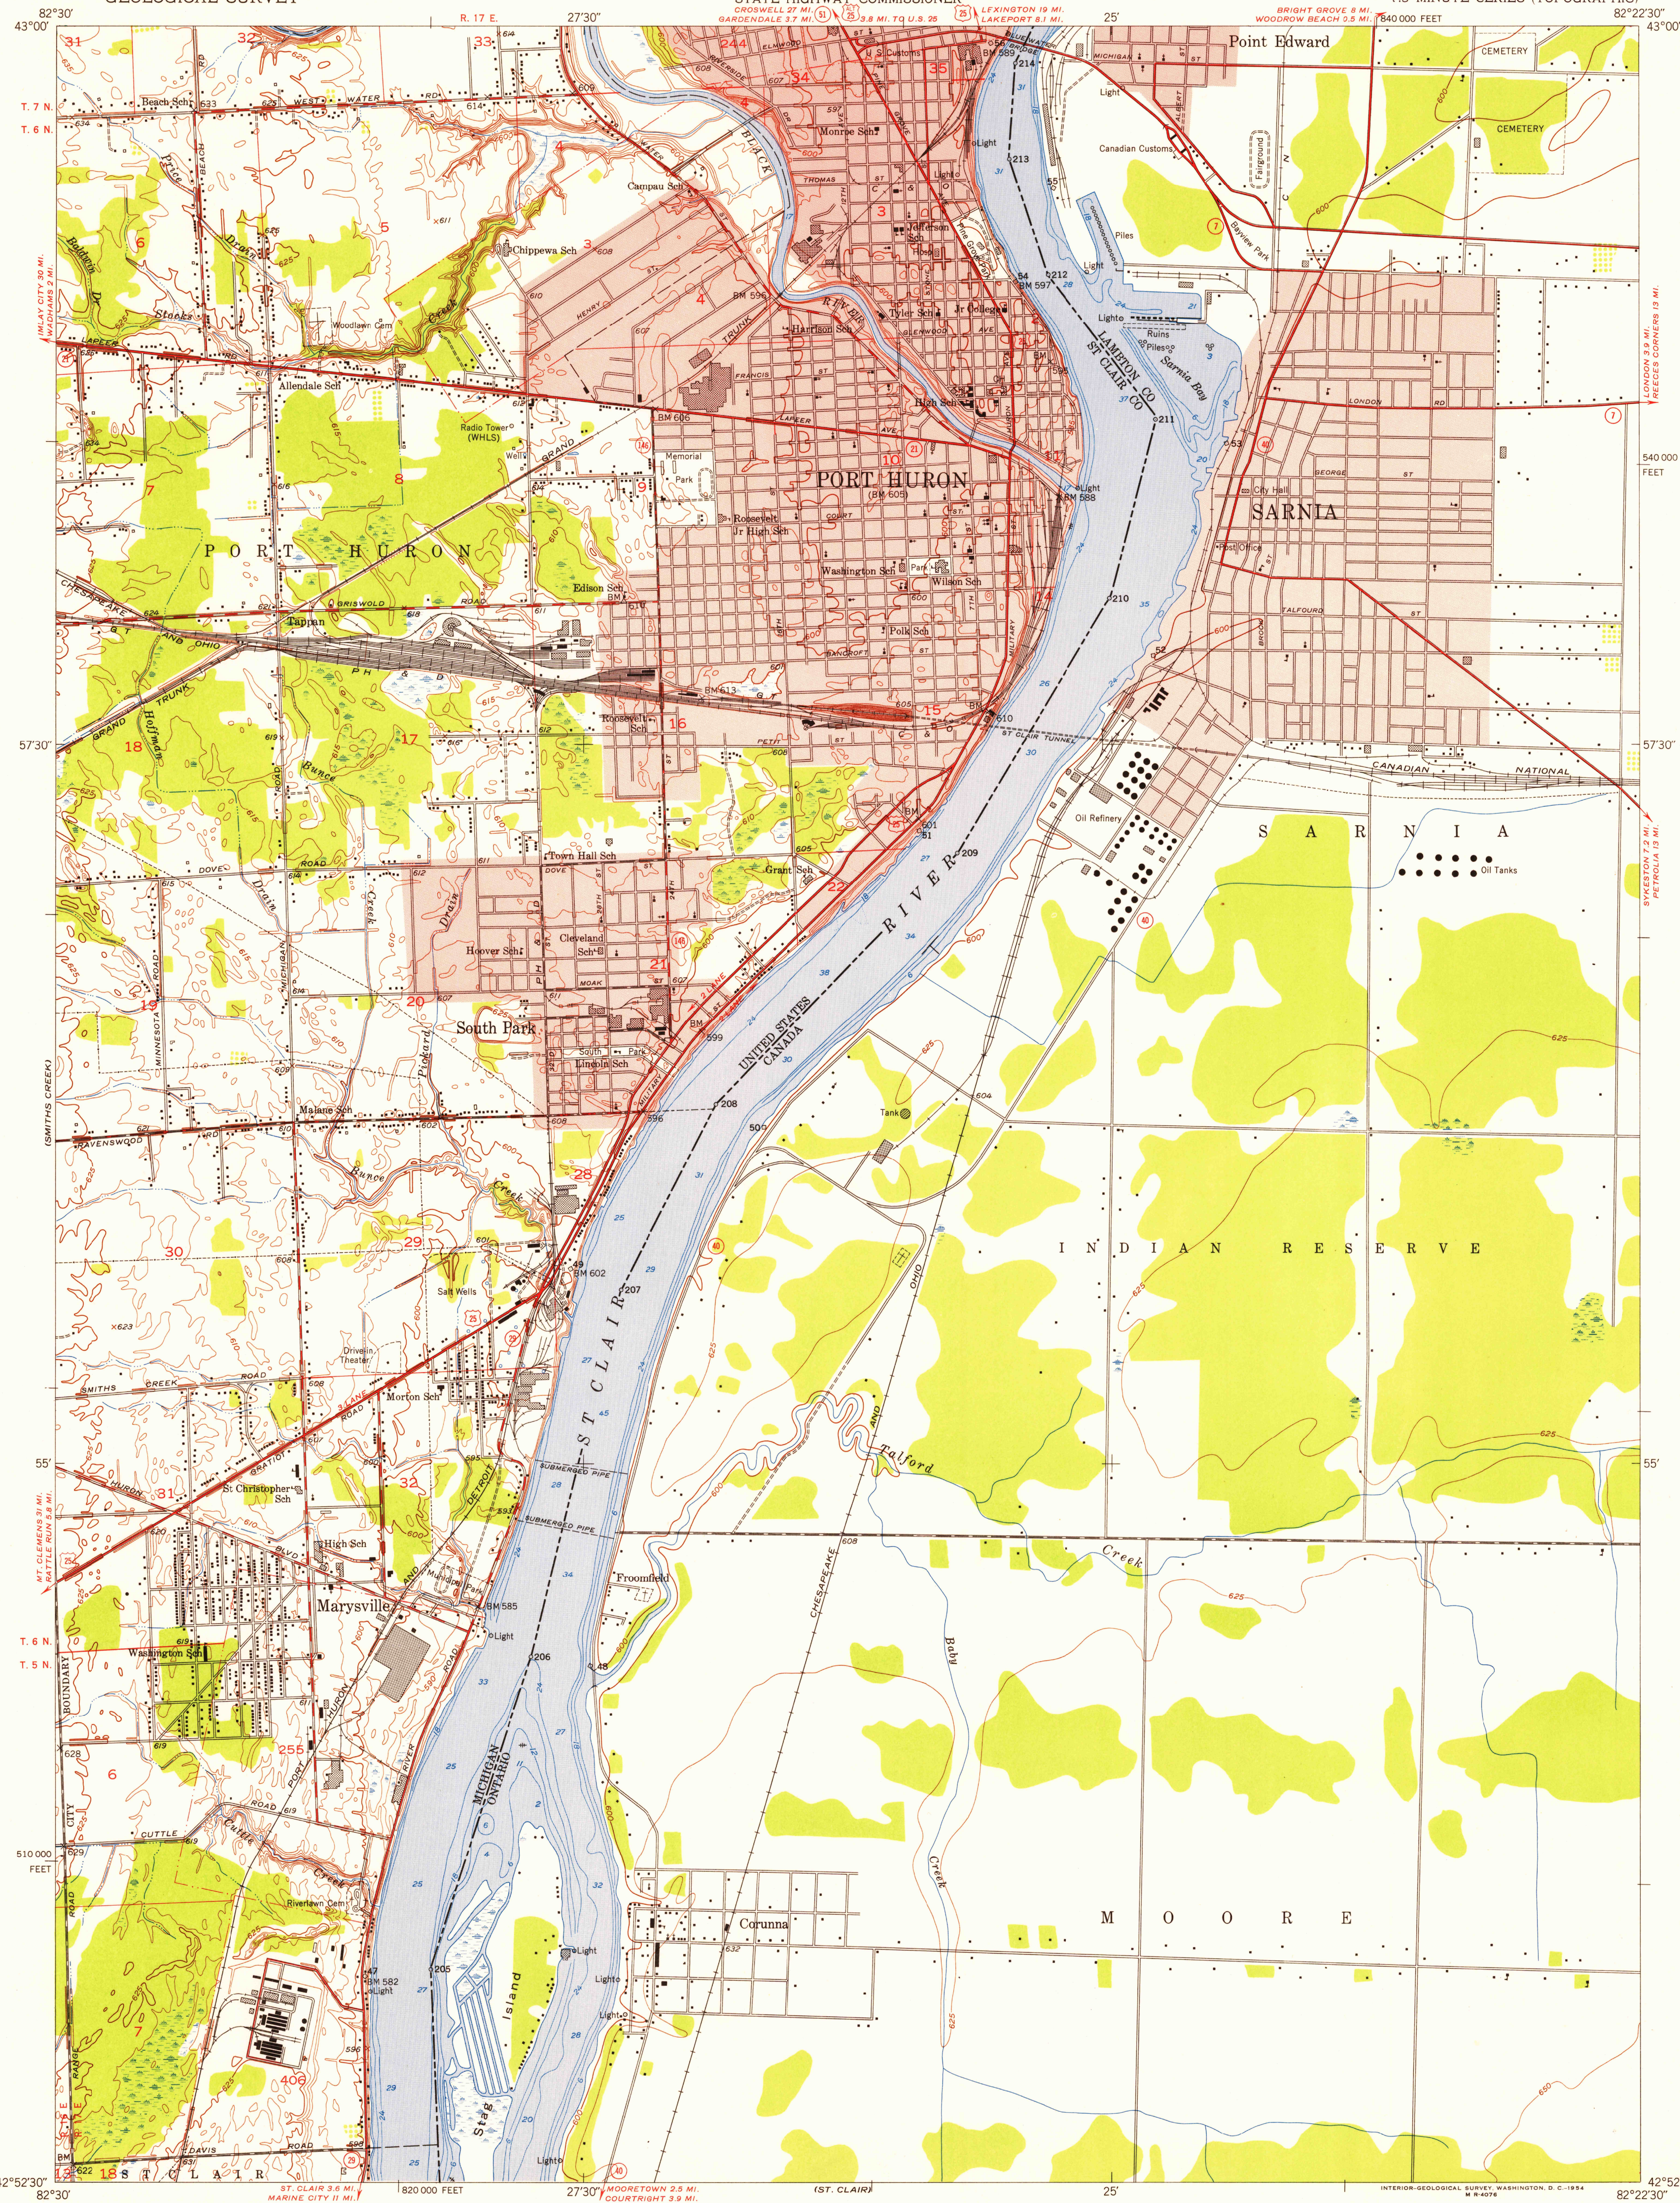

FILE COPY

FILE COPY


Mapped, edited, and published by the Geological Survey  
Control by USGS, USC&GS, and USCE

Culture and drainage in part compiled from aerial photographs  
Topography by plane-table surveys 1937. Culture revised 1952  
Hydrography from U.S. Lake Survey Chart 43 (1:40,000)  
Canadian topography copied from Sarnia quadrangle  
(1:63,360) 1909, revised 1936, Canadian  
Department of National Defence

Polyconic projection. 1927 North American datum  
10,000-foot grid based on Michigan coordinate system,  
east zone

Red tint indicates areas in which only  
landmark buildings are shown

TRUE NORTH  
MAGNETIC NORTH  
APPROXIMATE MEAN  
DECLINATION, 1952

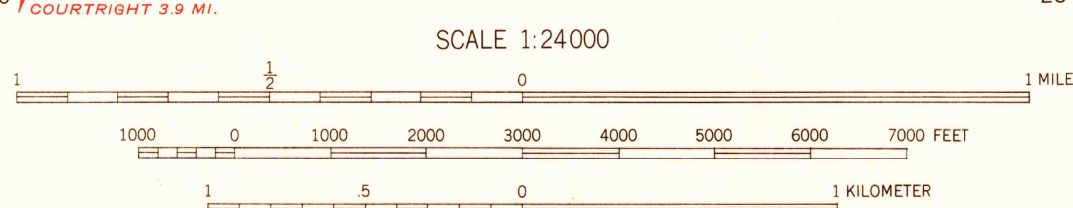

CONTOUR INTERVAL 5 FEET  
CONTOUR INTERVAL IN CANADIAN AREA 25 FEET  
DATUM IS MEAN SEA LEVEL  
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS RIVER SURFACE AT  
FOLLOWING STAGES: LAKE HURON—578 AND LAKE ST. CLAIR—573

THE U. S. PORTION OF THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS  
Historical File  
Topographic Division

ROAD CLASSIFICATION

Heavy-duty 4 LANE 16 LANE Light-duty  
Medium-duty 4 LANE 16 LANE Unimproved dirt  
U. S. Route State Route



PORT HURON, MICH.  
N4252.5—W8222.5/7.5

1952