


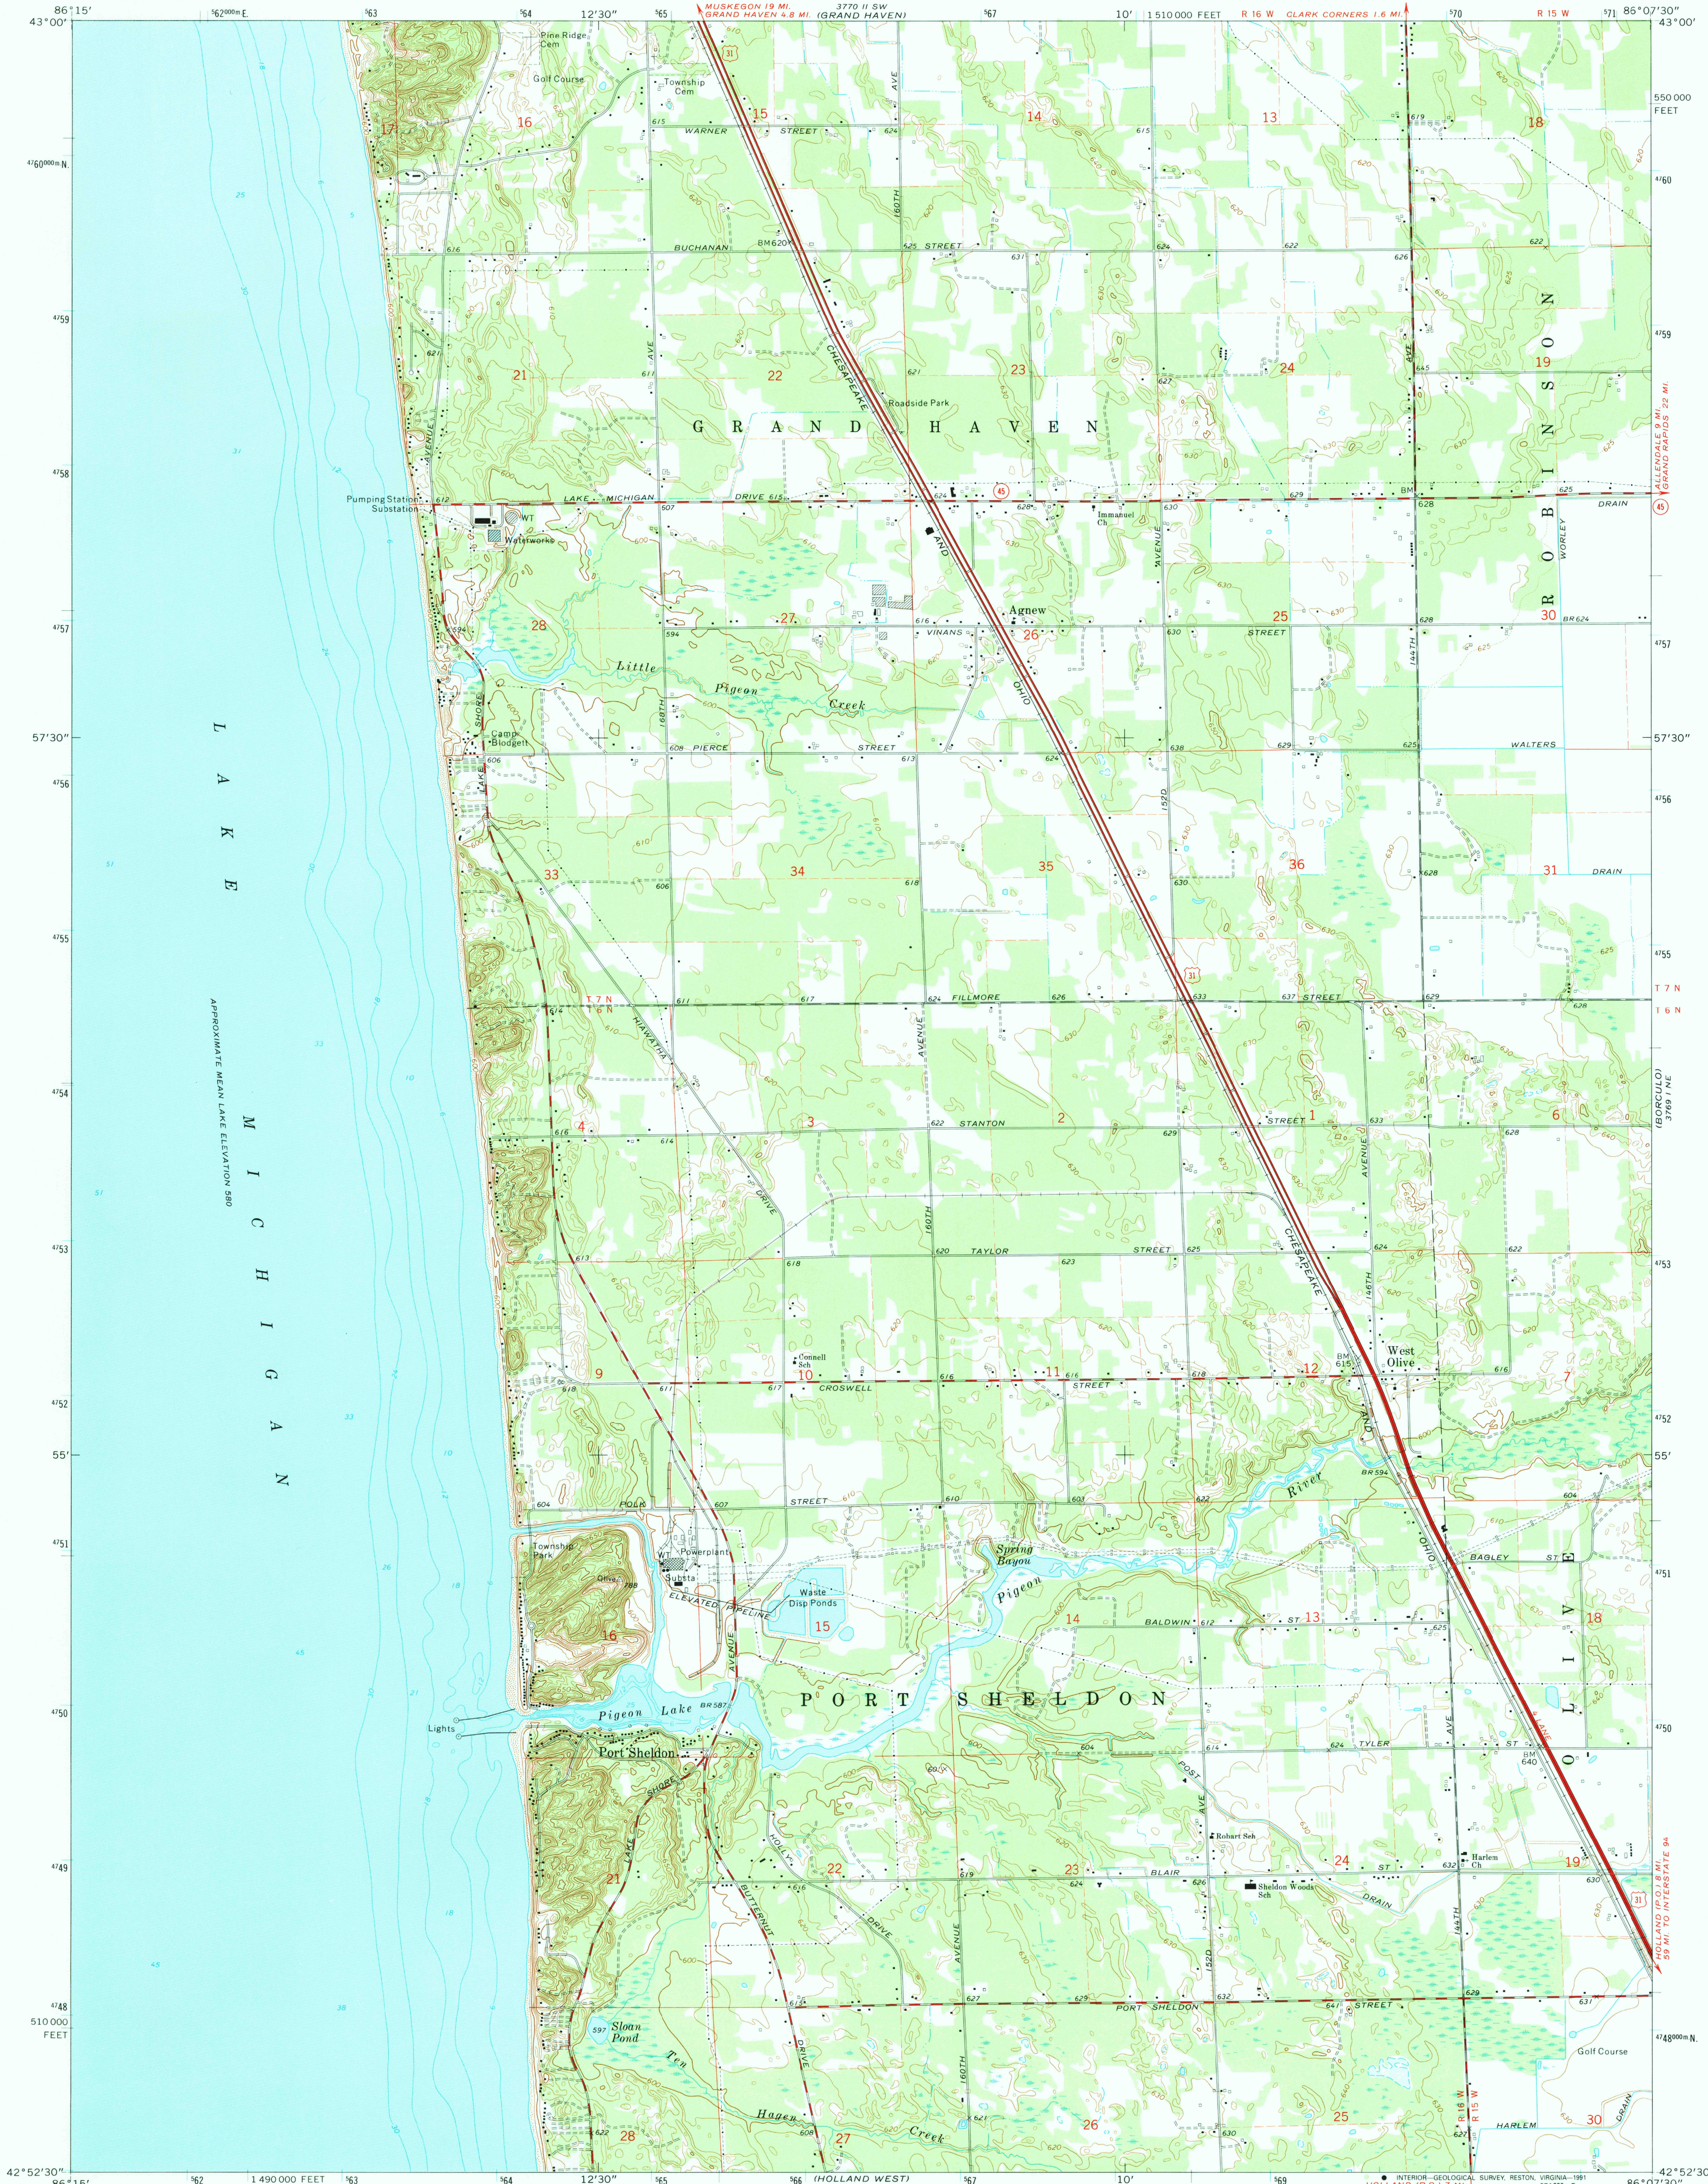

Mapped, edited, and published by the Geological Survey
in cooperation with State of Michigan agencies

Control by USGS and NOS/NOAA


Topography by photogrammetric methods from aerial
photographs taken 1969. Field checked 1972

Selected hydrographic data compiled from U. S. Lake Survey Chart 76 (1973)
This information is not intended for navigational purposes

Projection and 10,000-foot grid ticks: Michigan coordinate
system, south zone (Lambert conformal conic)
1000-metre Universal Transverse Mercator grid ticks,
zone 16, shown in blue. 1927 North American datum

The difference between 1927 North American Datum and North
American Datum of 1983 (NAD 83) for 7.5-minute intersections
is given in USGS Bulletin 1875. The NAD 83 is shown by
dashed corner ticks

Map photoinspected 1980
No major culture or drainage changes observed

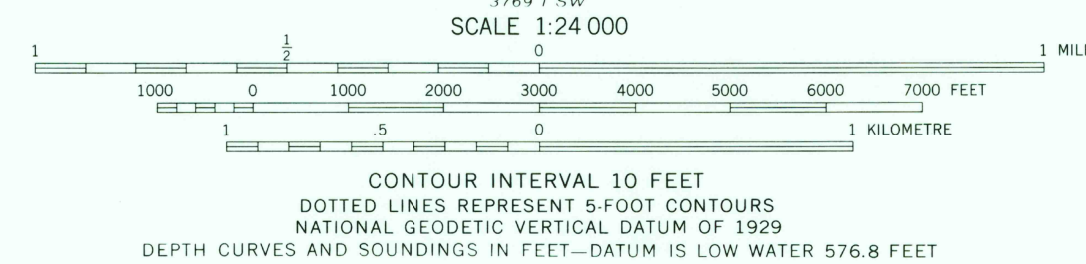

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

MICHIGAN DEPARTMENT OF NATURAL RESOURCES, LANSING, MICHIGAN 48909
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION
Primary highway, hard surface ——— Light-duty road, hard or improved surface
Secondary highway, hard surface ——— Unimproved road ———
Interstate Route ——— U. S. Route ——— State Route ———



PORT SHELDON, MICH.
NW/4 HOLLAND 15' QUADRANGLE
42086-H2-TF-024

1972
PHOTOINSPECTED 1980
DMA 3769 1 NW—SERIES V862

