


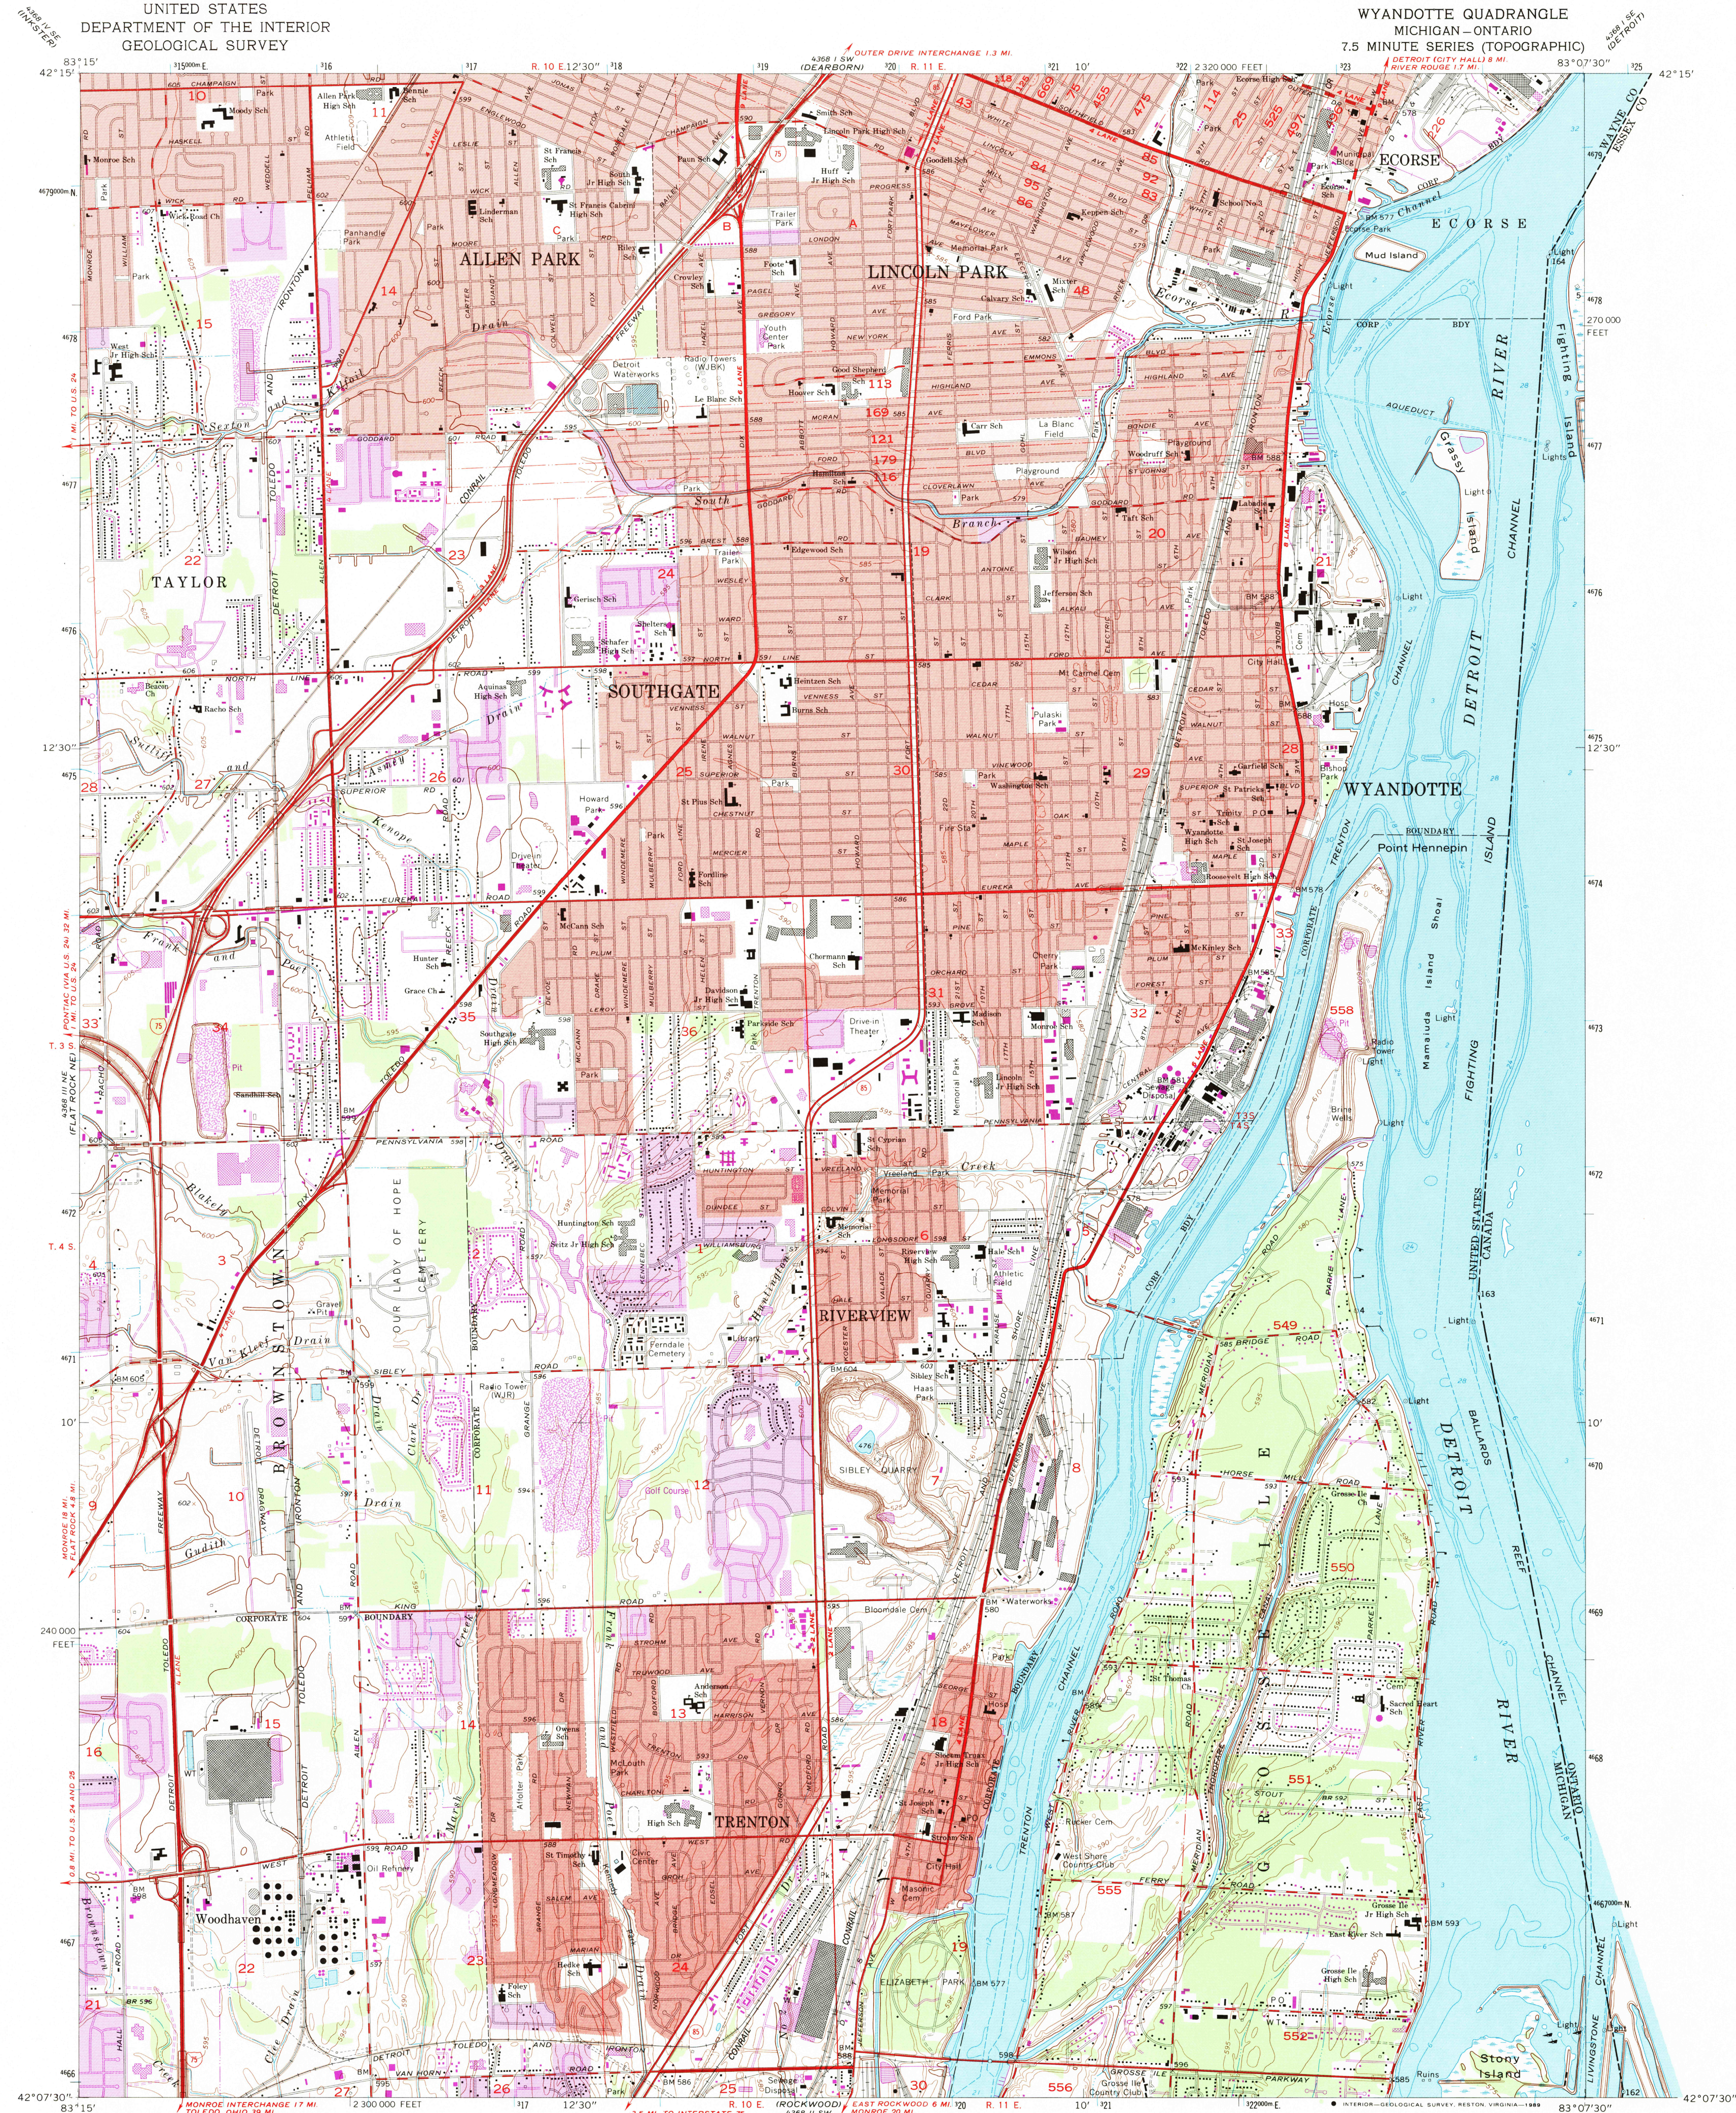

Maped, edited, and published by the Geological Survey
in cooperation with State of Michigan agencies
Control by USGS, USC&GS, USCE, and Wayne County Highway Commission
Planimetry by photogrammetric methods from aerial photographs
Topography by planetable surveys 1940. Revised from aerial
photographs taken 1966. Field checked 1967
Selected hydrographic data compiled from U. S. Lake Survey
Charts 41 and 412 (1966). This information is not intended
for navigational purposes
Polyconic projection. 1927 North American datum
10,000-foot grid based on Michigan coordinate system, south zone
1000-meter Universal Transverse Mercator grid ticks,
zone 17, shown in blue
Red tint indicates areas in which only landmark buildings are shown

UTM GRID AND 1981 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET
To place on the predicted North American Datum 1983
move the projection lines 7 meters west as shown by
dashed corner ticks
THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
AND BY THE GEOLOGICAL SURVEY DIVISION
MICHIGAN DEPARTMENT OF NATURAL RESOURCES, LANSING, MICHIGAN 48909
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
Interstate Route ——— U. S. Route ——— State Route ———
CONTOUR INTERVAL 5 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS RIVER SURFACE AT
FOLLOWING STAGES: LAKE ST. CLAIR 571.7 AND LAKE ERIE 568.6
QUADRANGLE LOCATION
MICHIGAN
WYANDOTTE, MICH.—ONT.
42083-82-TF-024
1967
PHOTOREVISED 1981
DMA 4368 II NW—SERIES V862