



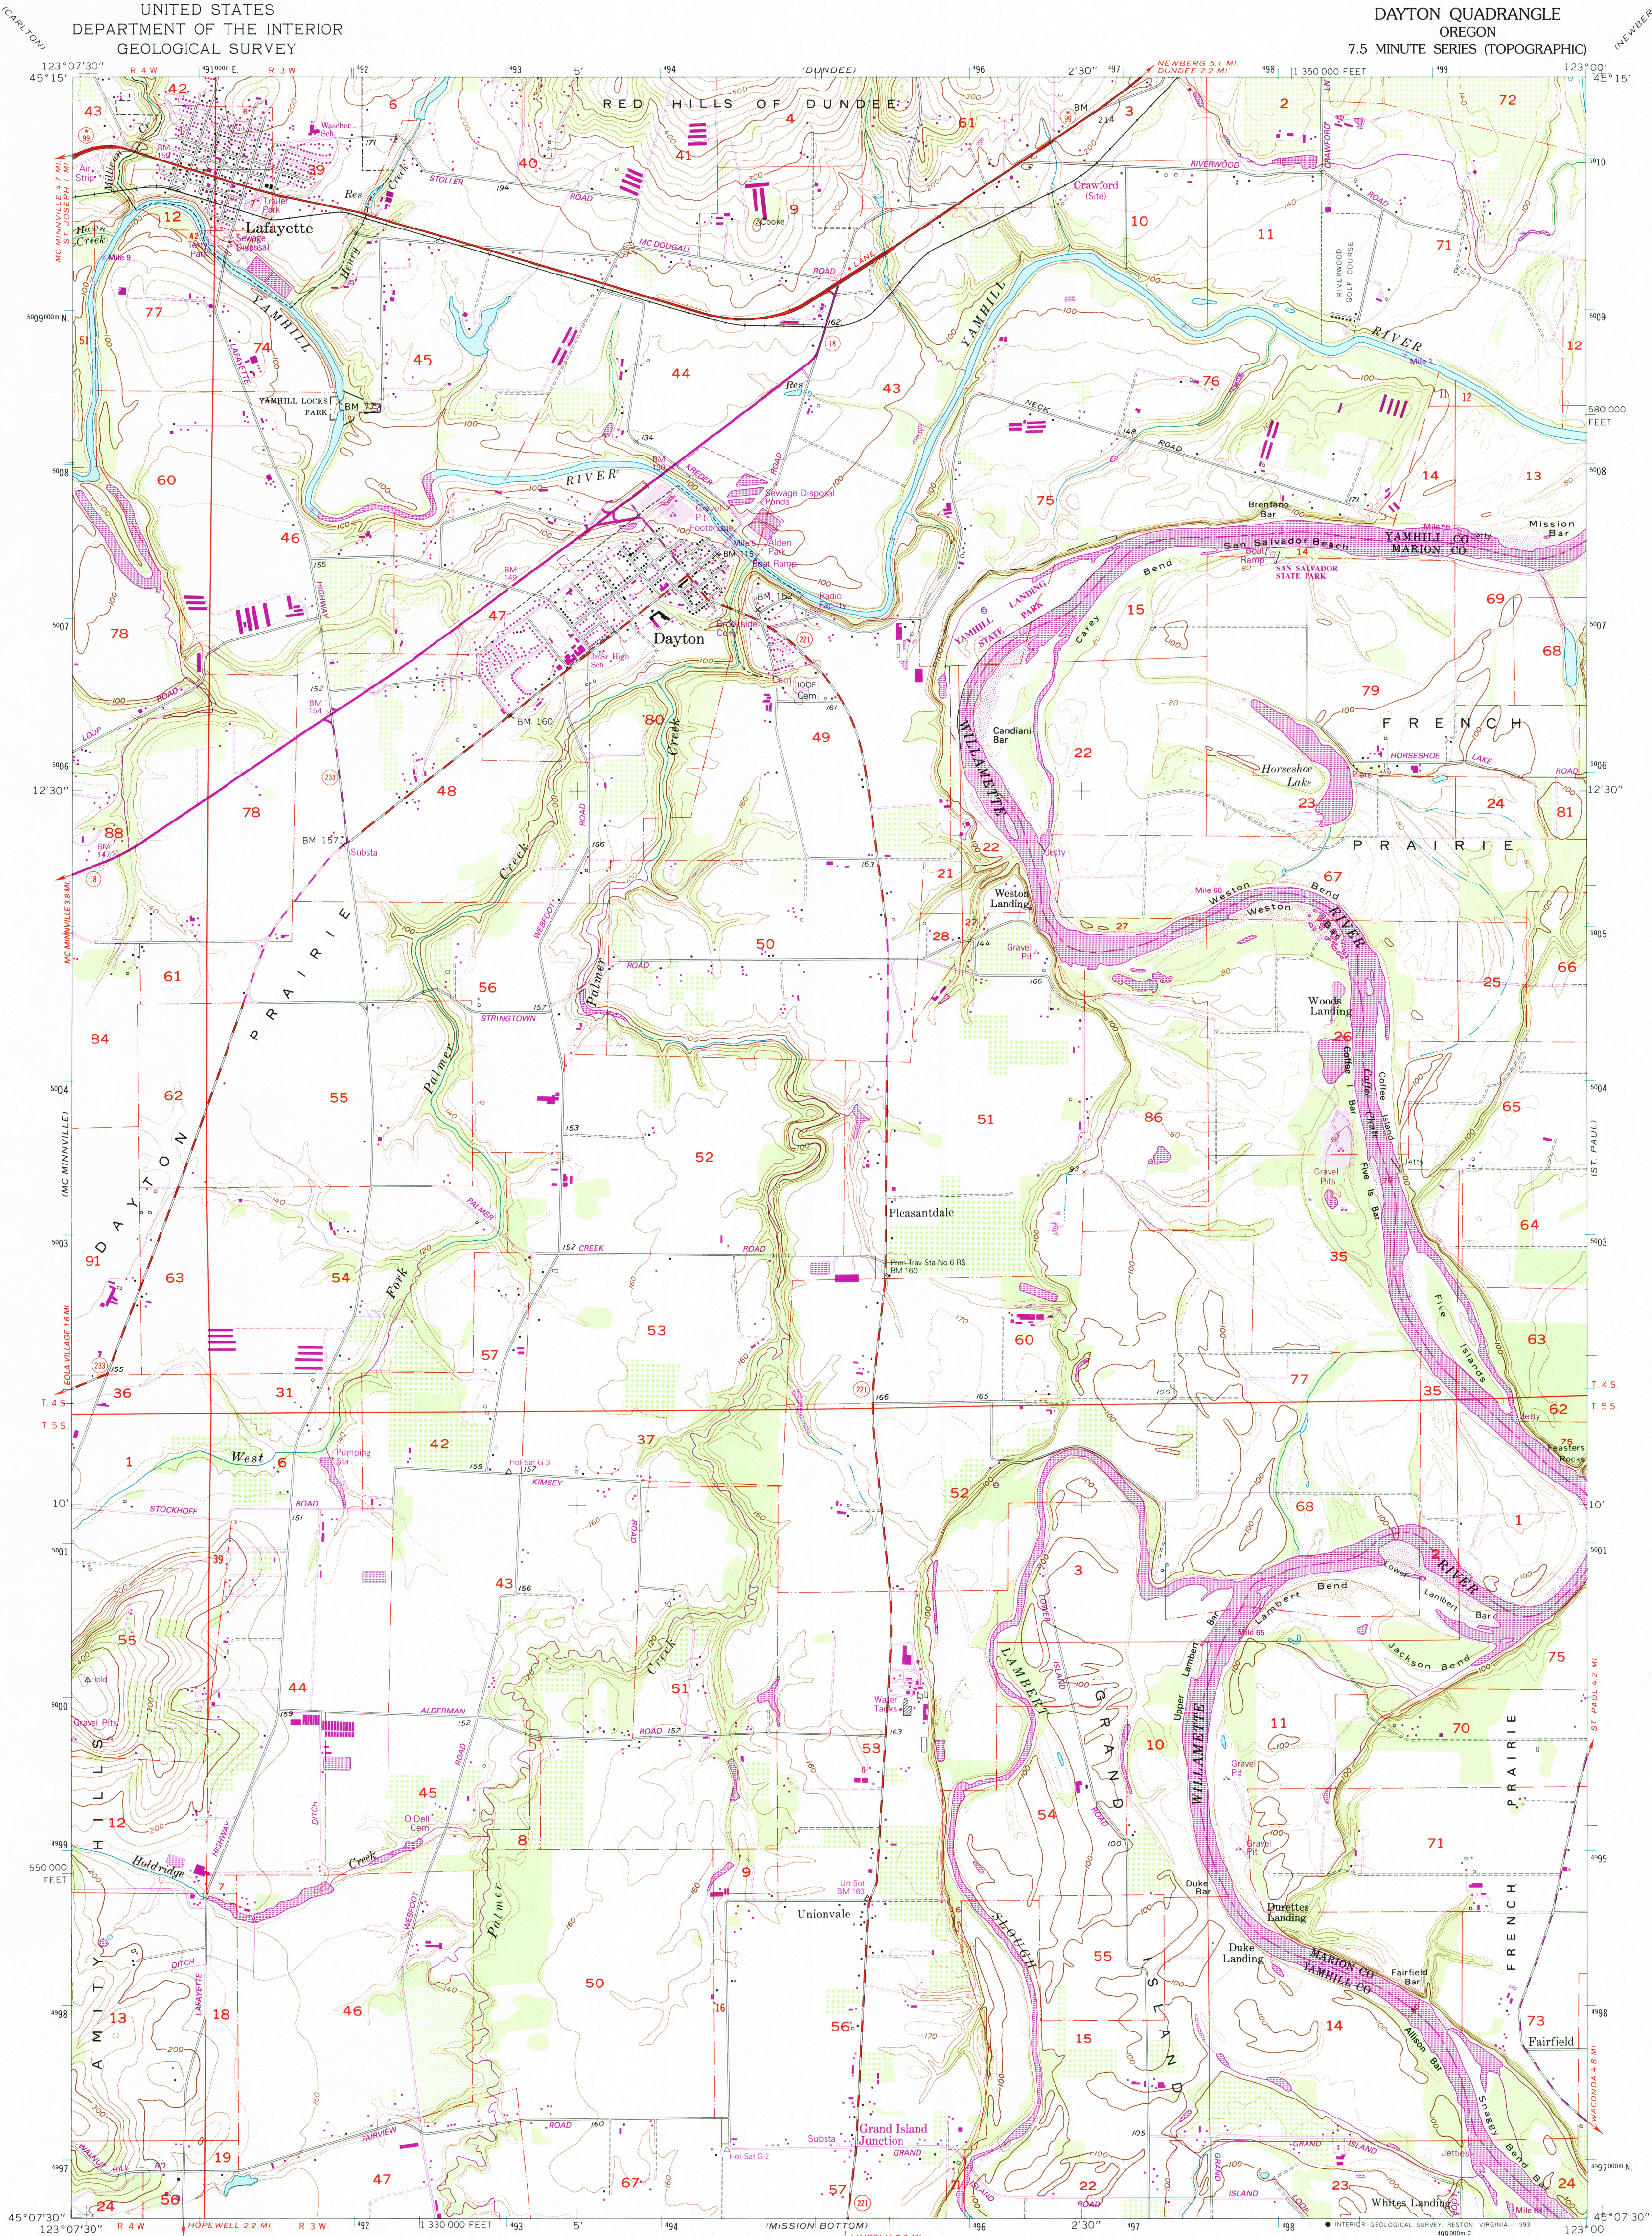

Produced by the United States Geological Survey
Control by USGS, NOS/NOAA, and OSHD
Compiled from aerial photographs taken 1954. Information shown
in purple has been updated from aerial photographs taken 1987 and
field checked. Map edited 1992. Conflicts may exist between
some updated features and previously mapped contours.
North American Datum of 1927 (NAD 27). Projection and
10,000-foot grid ticks. Oregon Coordinate System, north zone
(Lambert Conformal Conic). 1000-meter Universal Transverse
Mercator grid ticks, zone 10, shown in blue.
The difference between NAD 27 and North American Datum of
1983 (NAD 83) for 7.5 minute intersections is given in USGS
Bulletin 1875. The NAD 83 is shown by dashed corner ticks.
There may be private inholdings within the boundaries of the
National or State reservations shown on this map.



SCALE 1:24,000
CONTOUR INTERVAL 20 FEET
DOTTED LINES REPRESENT 10-FOOT CONTOURS
NATIONAL GEODETIC VERTICAL DATUM OF 1929
THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
U.S. Route ——— State Route ———
DAYTON, OREG.
45123-B1-TF-024
1957
REVISED 1992
DMA 1374 11 NE-SERIES V892

