


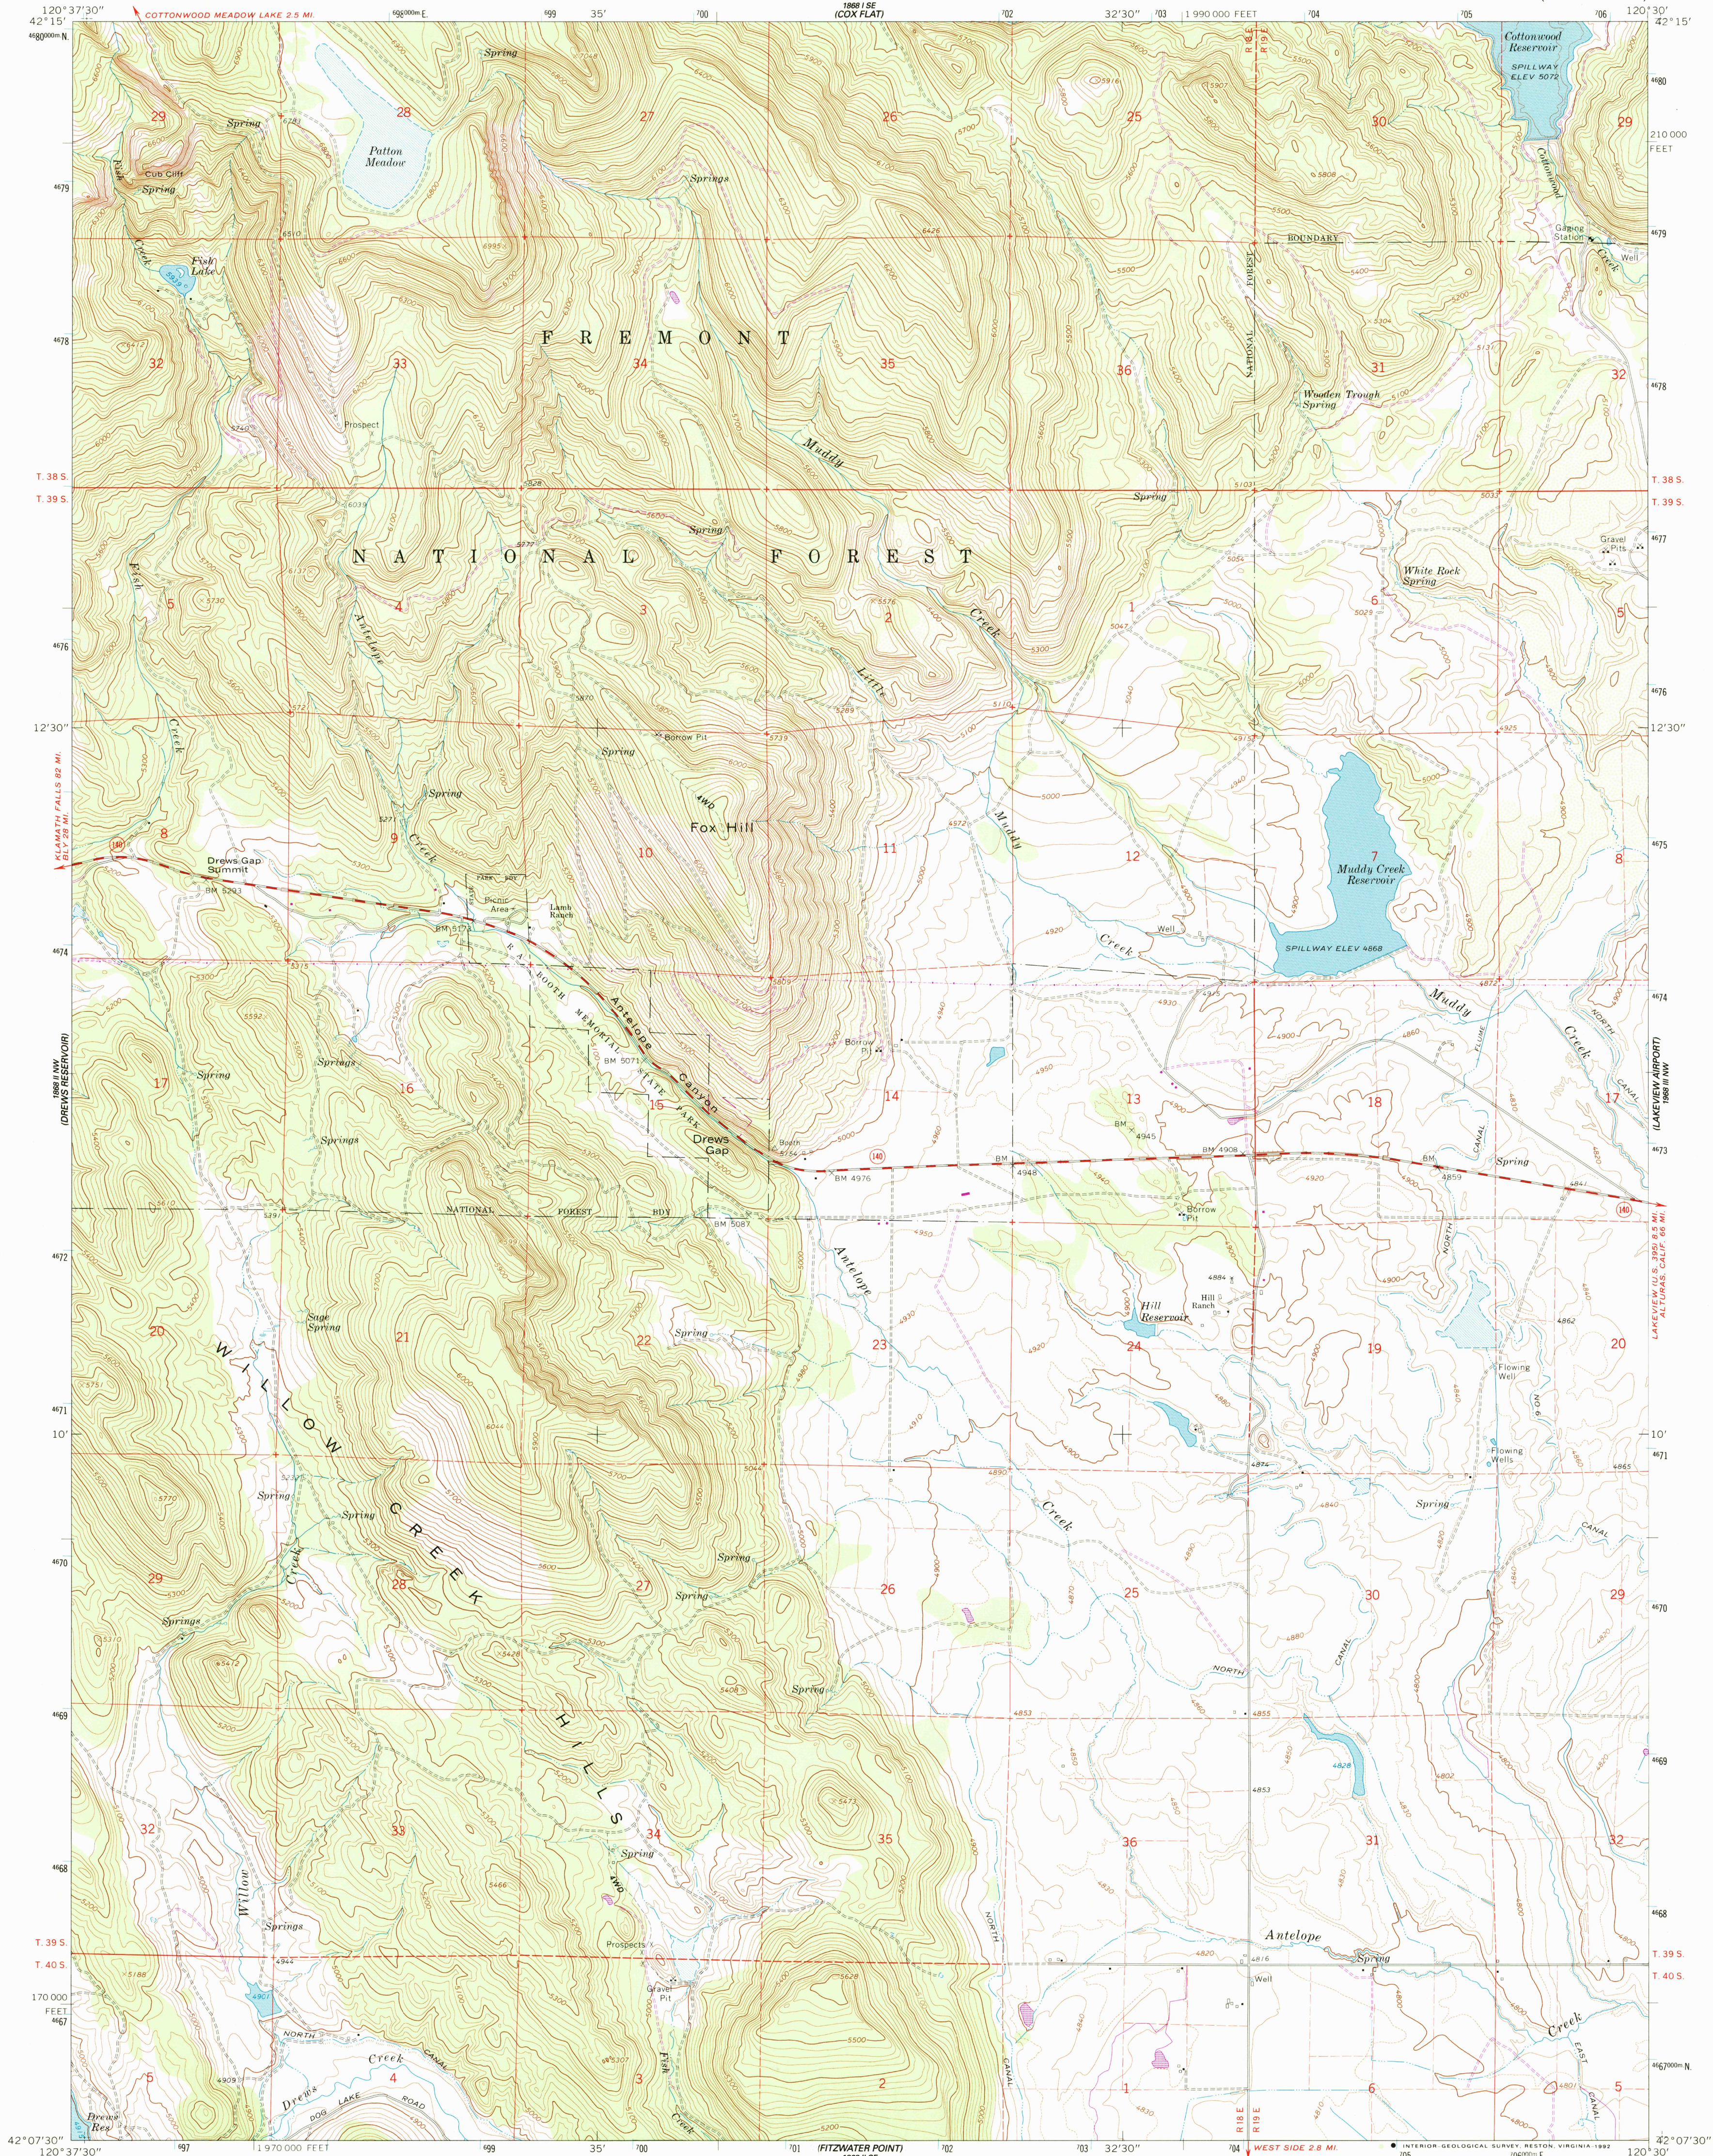

Mapped, edited, and published by the Geological Survey
Control by USGS and NOS/NOAA



Topography by photogrammetric methods from aerial photographs
taken 1960 and 1962. Field checked 1964.

Polycyclic projection. 1927 North American Datum
10,000-foot grid based on Oregon coordinate system,
south zone.
1000-meter Universal Transverse Mercator grid ticks, zone 10,
shown in blue.

The difference between 1927 North American Datum and North
American Datum of 1983 (NAD 83) for 7.5 minute intersections is
given in USGS Bulletin 1875. The NAD 83 is shown by dashed
corner ticks.

Fine red dashed lines indicate selected fence lines

There may be private inholdings within the boundaries of
the National or State reservations shown on this map

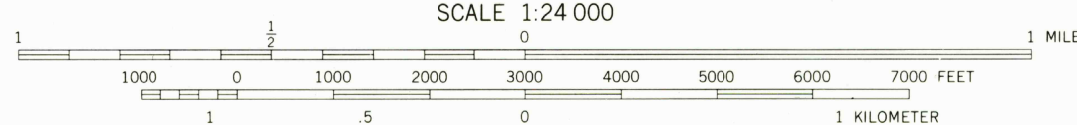

CONTOUR INTERVAL 20 FEET
DOTTED LINES REPRESENT 10-FOOT CONTOURS
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



Revisions shown in purple compiled from aerial photographs
taken 1979 and other source data. This information not
field checked. Map edited 1980

ROAD CLASSIFICATION
Medium-duty ——— Light-duty ———
Unimproved dirt ———
State Route ———

DREWS GAP, OREGON
42120-85-TF-024

1964
PHOTOREVISED 1980
DMA 1868 II NE-SERIES V892

