





Maped by the Army Map Service
Published for civil use by the Geological Survey
Control by USC&GS, USCE, and Pacific Power
and Light Company
Topography from aerial photographs by multiplex methods
Aerial photographs taken 1943. Field check 1953
Coastal hydrography compiled from USC&GS Chart
6151, 1949 (corrected to 1953)
Polyconic projection. 1927 North American datum
10,000-foot grid based on Oregon coordinate system,
north zone
1000-meter Universal Transverse Mercator grid ticks,
zone 10, shown in blue
To place on the predicted North American Datum 1983
move the projection lines 24 meters north and
97 meters east as shown by dashed corner ticks

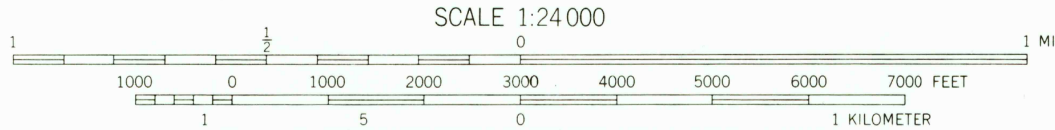

CONTOUR INTERVAL 50 FEET
DASHED LINES REPRESENT HALF-INTERVAL CONTOURS
NATIONAL GEODETIC VERTICAL DATUM OF 1929
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE AVERAGE RANGE OF TIDE IS APPROXIMATELY 8 FEET
THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
Heavy-duty ——— 4 LANE 16 LANE Light-duty ———
Medium-duty ——— 4 LANE 16 LANE Unimproved dirt ———
U. S. Route State Route

WARRENTON, OREG.—WASH.
N 4607.5—W 12352.5/7.5
1953
PHOTOREVISED 1973
DMA 1276 III NW—SERIES V892

RETURN TO:
USGS AND HISTORICAL MAP ARCHIVES

MAY 25 1982

3700