


U. S. G. S.  
FILE COPY  
Inspection and Editing.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

WAR DEPARTMENT  
CORPS OF ENGINEERS, U. S. ARMY  
NOTI 7.4 MI.  
VAUGHN 3.6 MI.


JUNCTION CITY 20 MI.  
ELMIRA 4.8 MI.

OREGON EUGENE 10.4 MI.  
CROW QUADRANGLE  
15-MINUTE SERIES  
Not joined to (Elmira)

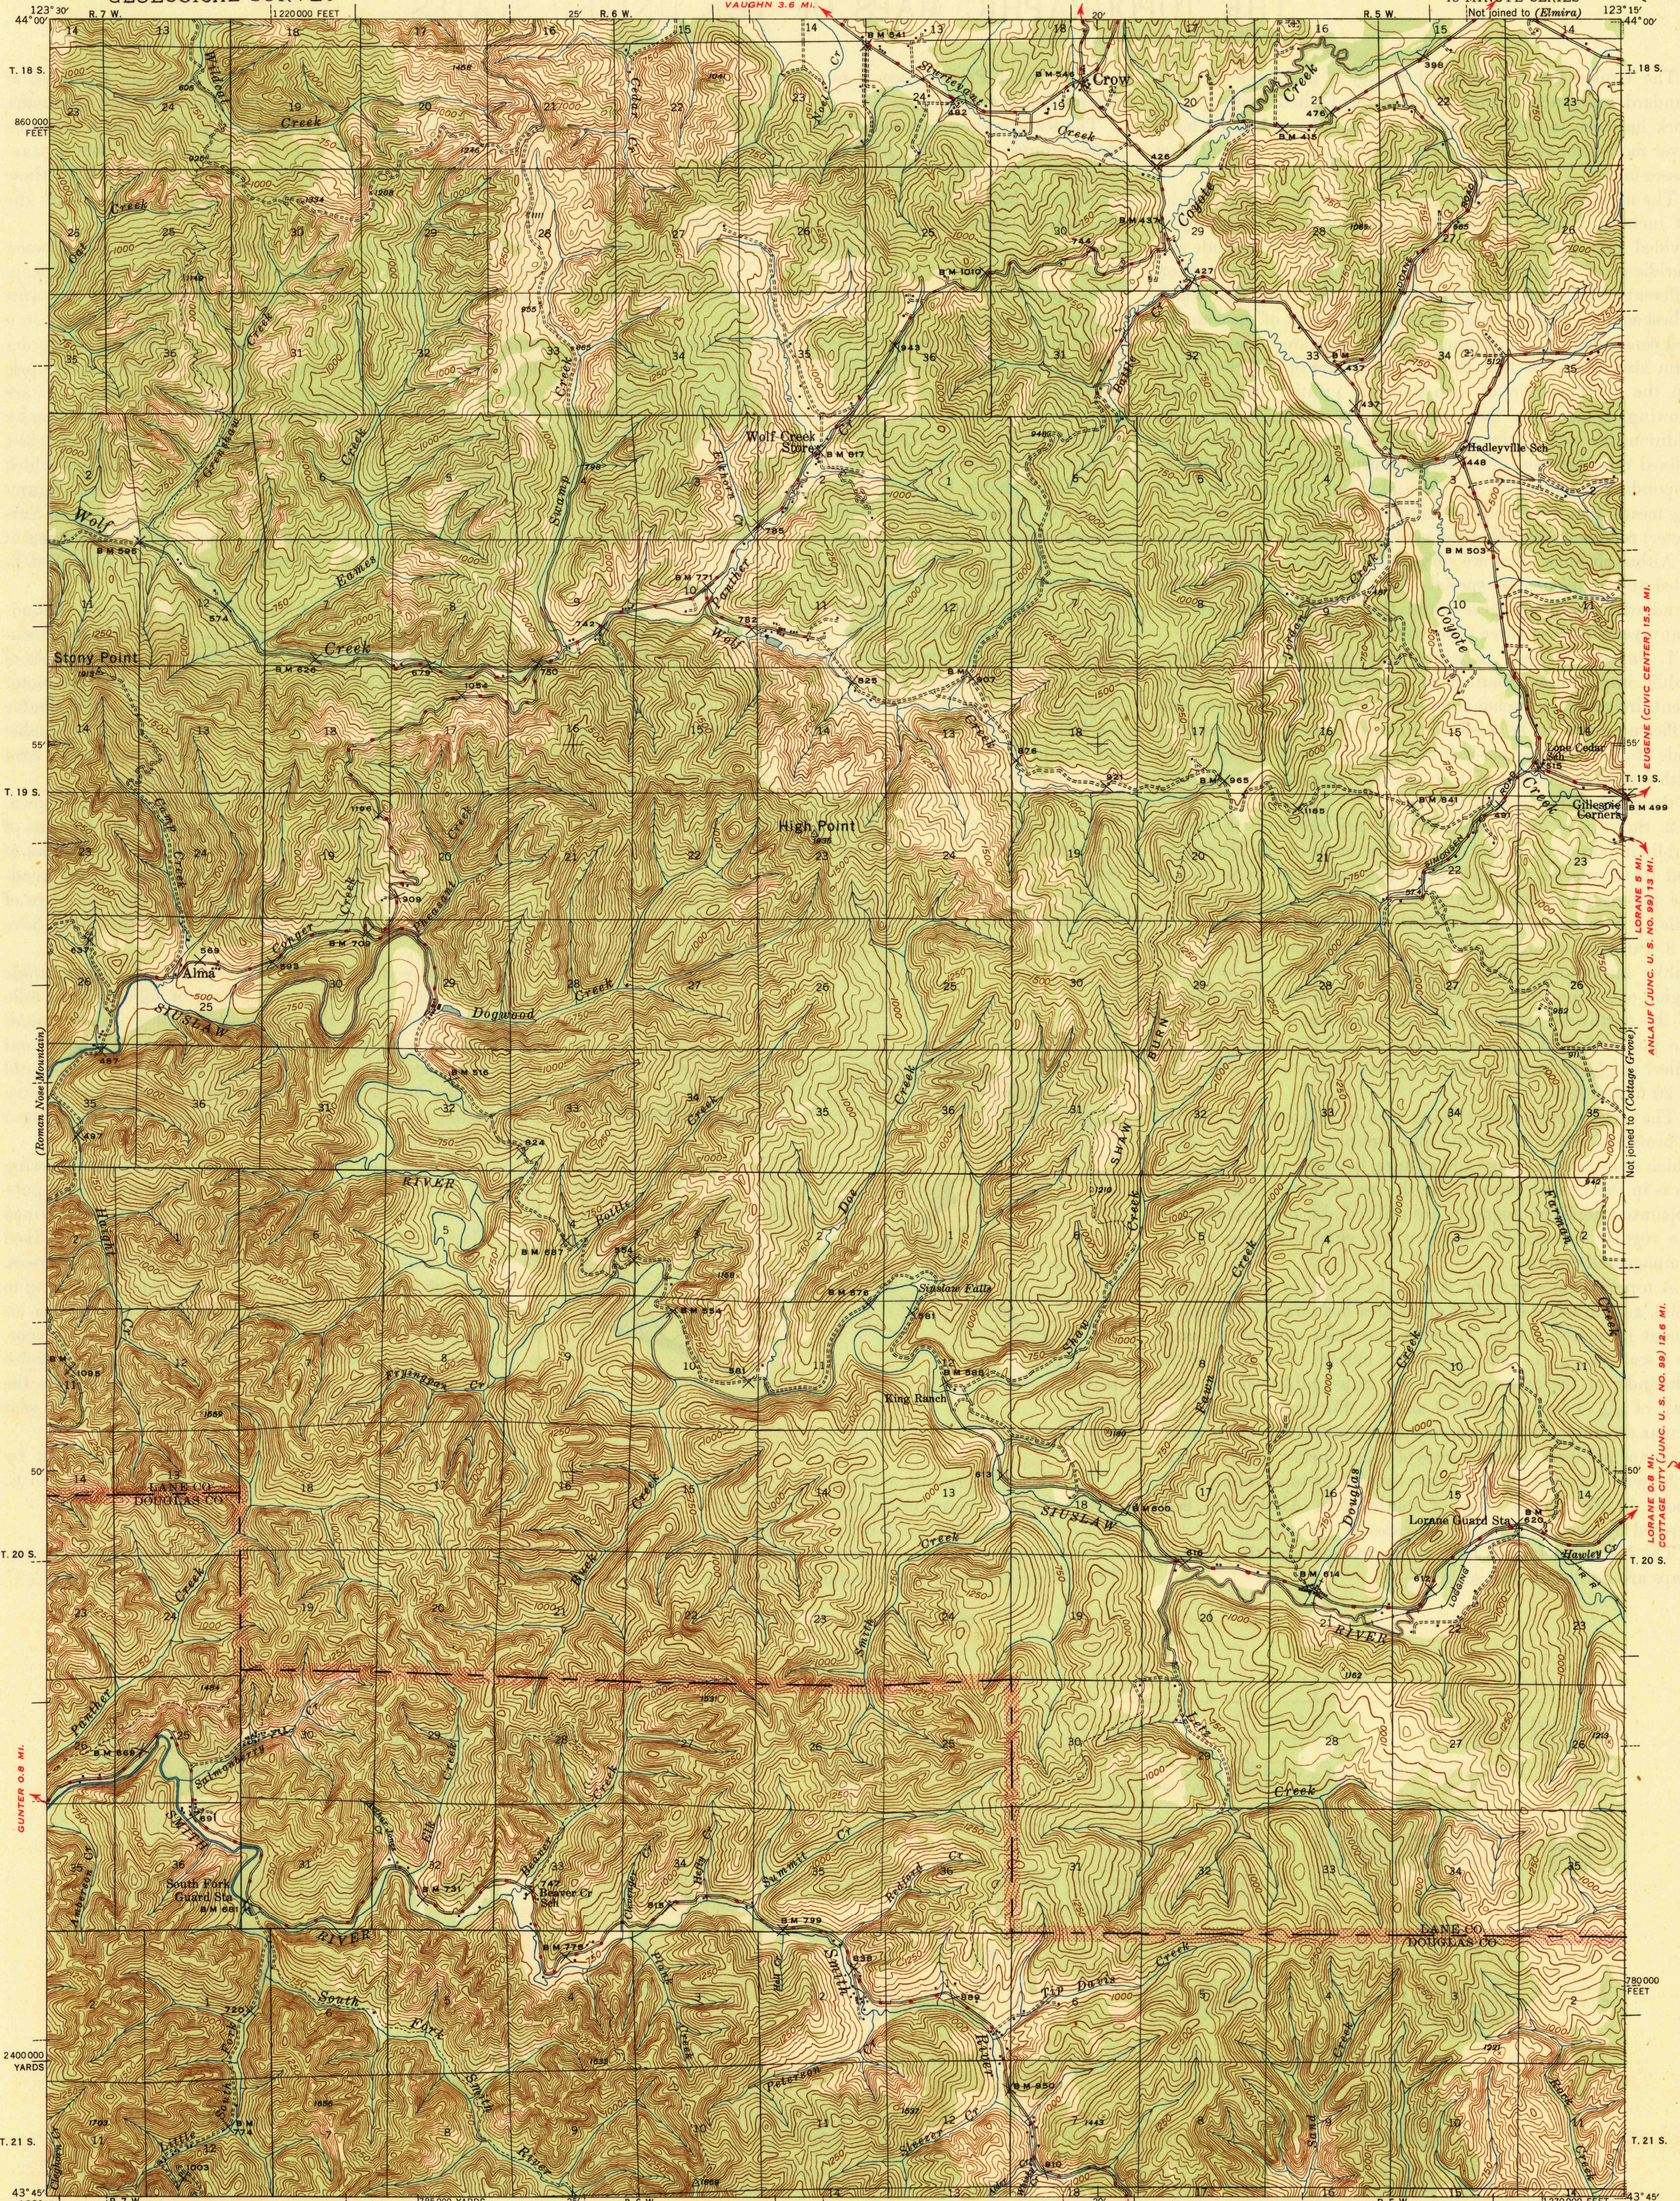

Mapped by the Geological Survey  
1942

TRUE NORTH  
MAGNETIC NORTH  
APPROXIMATE MEAN  
DECLINATION, 1942

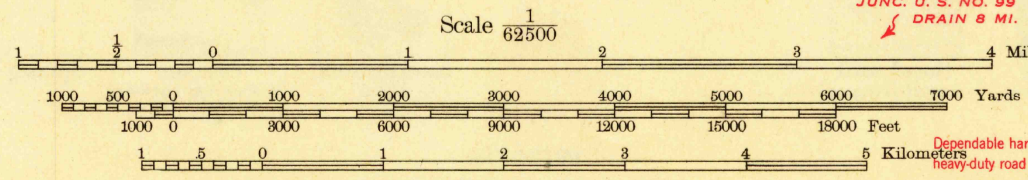

Contour interval 50 feet  
Datum is mean sea level

USGS  
Historical File  
Topographic Division

ROAD CLASSIFICATION  
1945  
Dependable hard-surface  
heavy-duty road  
Secondary hard-surface  
all-weather road  
Dirt road  
Dry weather roads  
Loose-surface graded  
Unsurfaced, graded  
Dirt road  
More than two lanes indicated along road with tick at point of change

Polyconic projection. 1927 North American datum  
5000 yard grid based on U. S. zone system, G  
10000 foot grid based on Oregon (South)  
rectangular coordinate system

U. S. Route 15 CROW, OREG.  
Edition of 1945  
N4345-W12315/15

U. S. G. S.  
FILE COPY  
Inspection and Editing.