

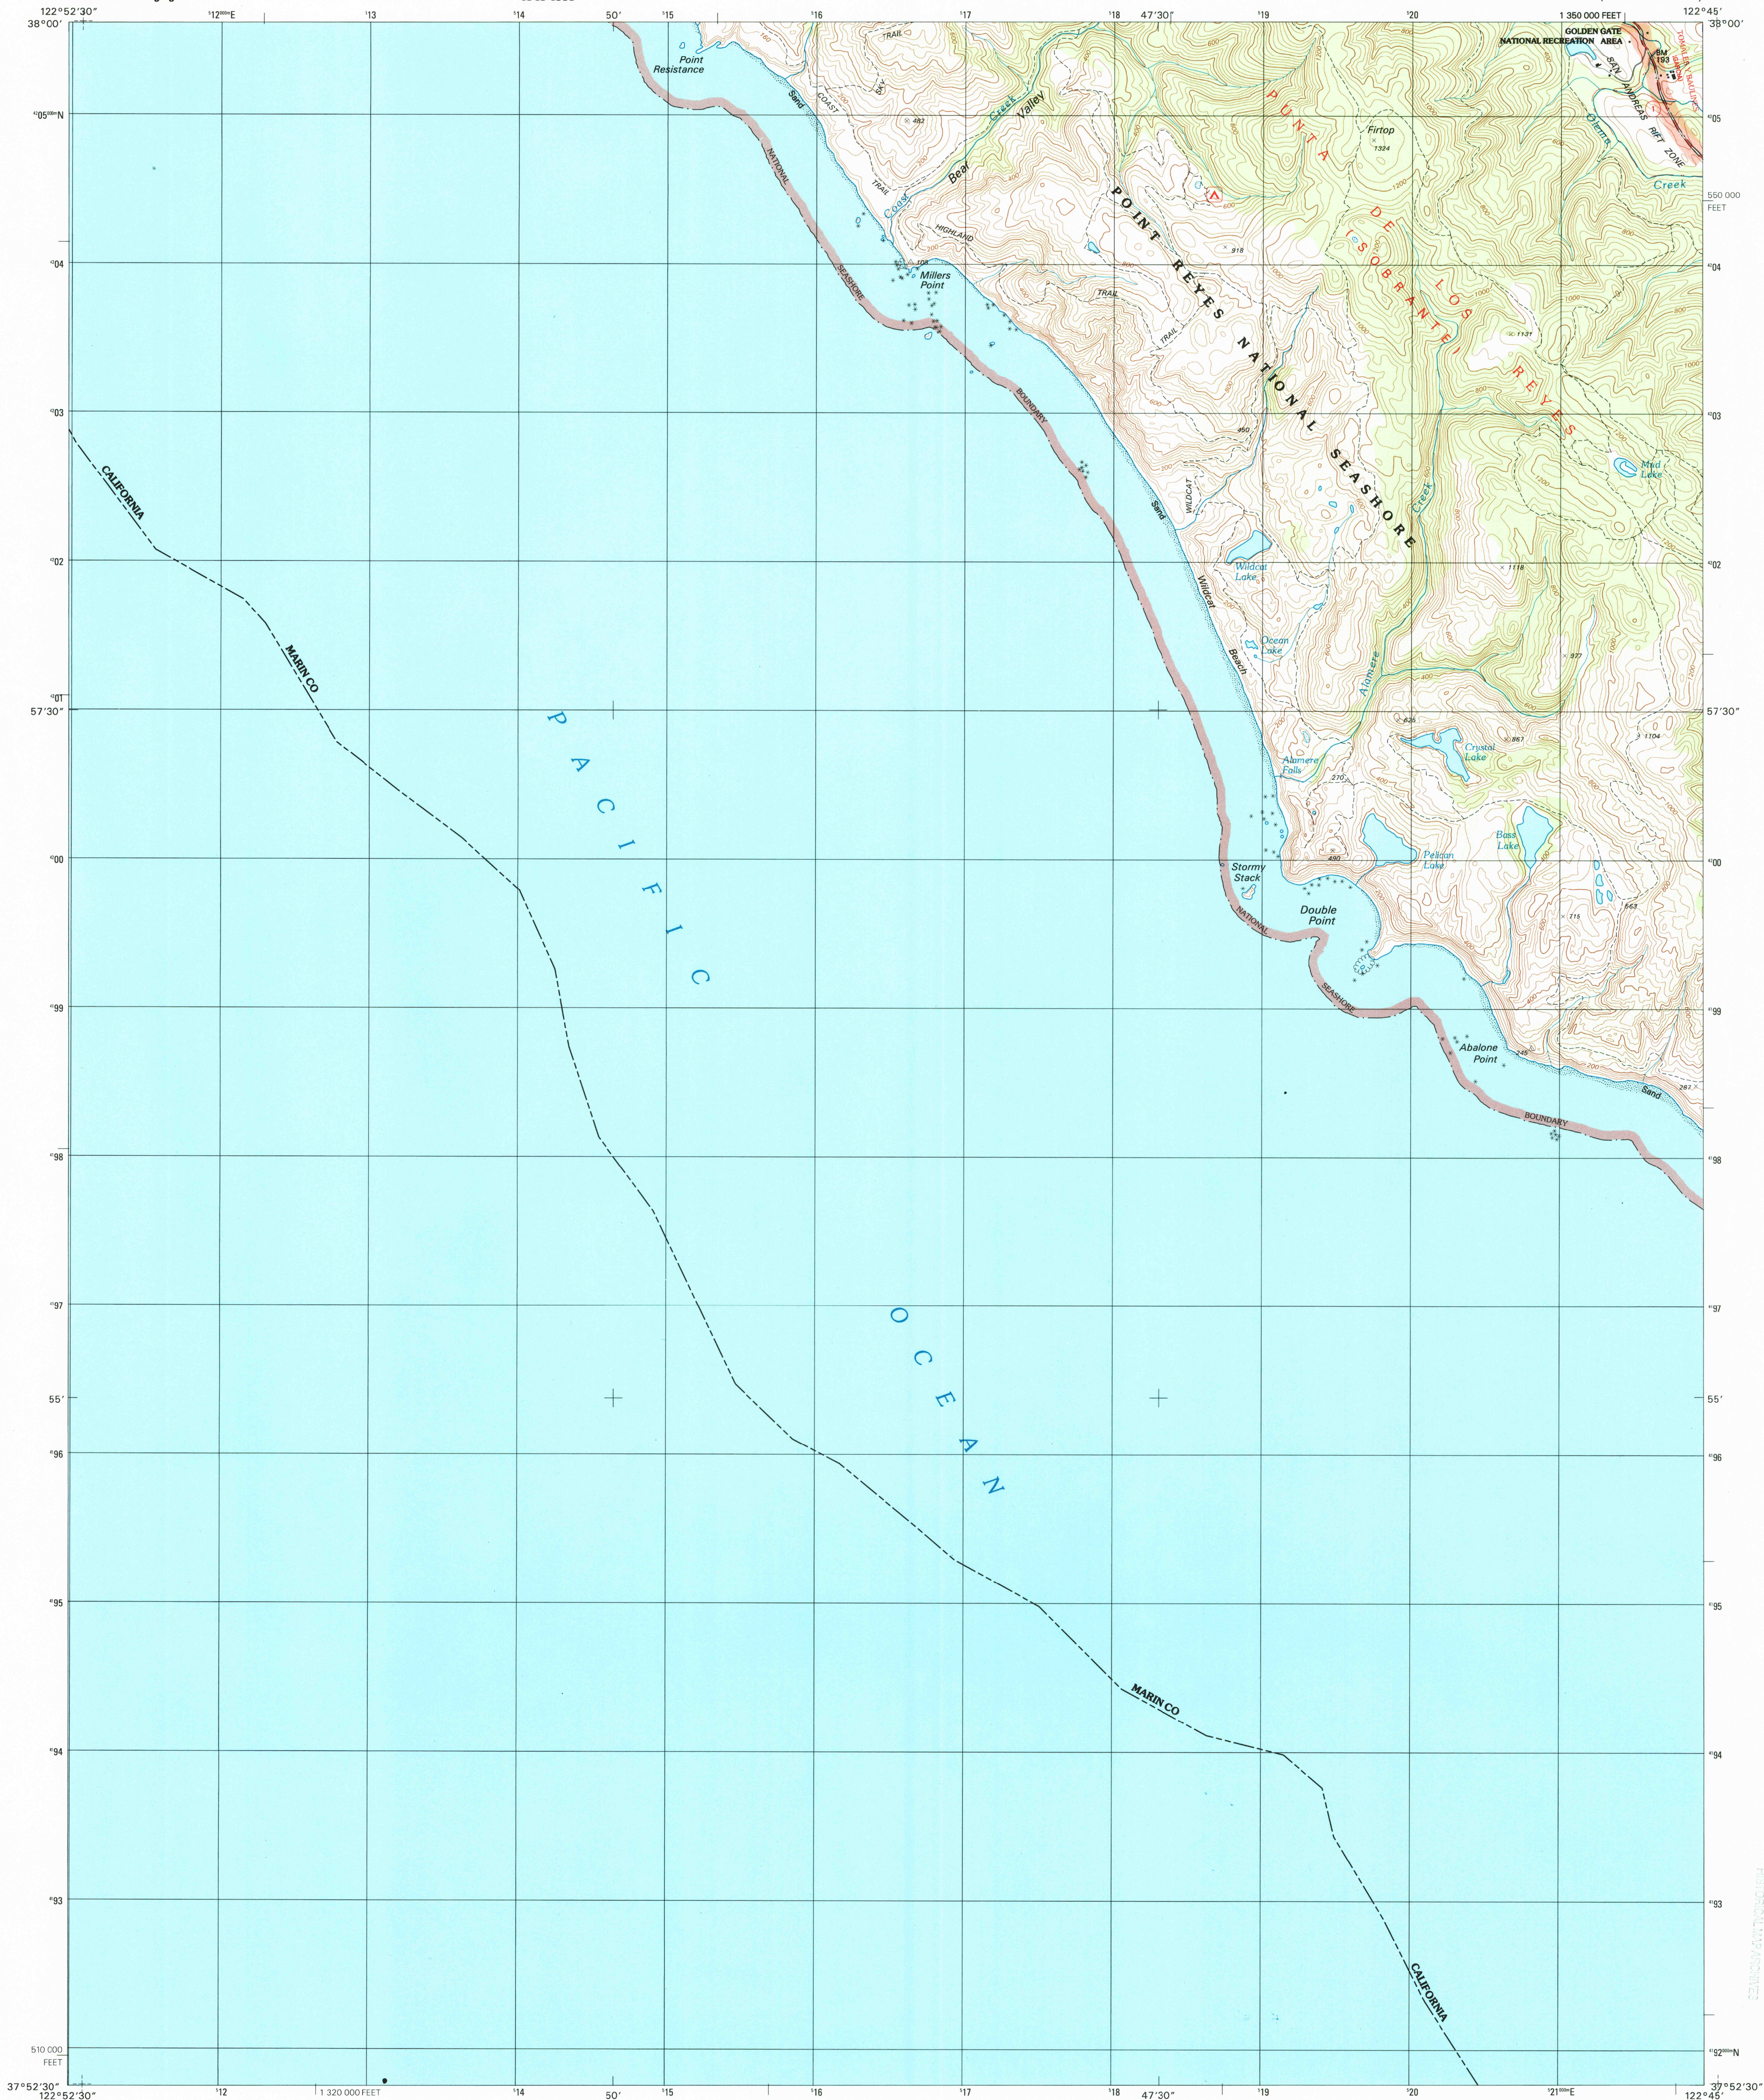


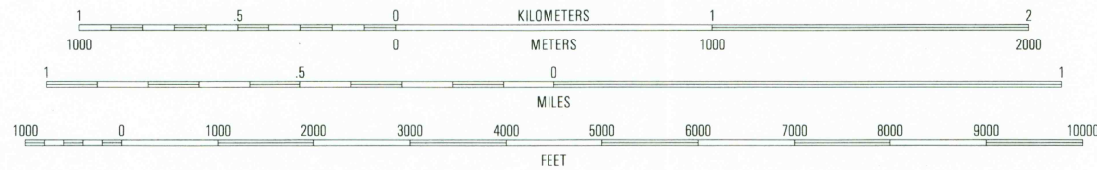

Produced by the United States Geological Survey
Topography compiled 1952. Planimetry derived from imagery taken 1993 and other sources. Photospectroscopy using imagery taken 1994; no major culture or drainage changes observed. PLSS and survey control current as of 1954. Boundaries verified 1999.
North American Datum of 1927 (NAD 27). Projection and 1000-meter grid: Universal Transverse Mercator, zone 10 10 000-foot ticks: California Coordinate System of 1927 (zone 3).
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.
There may be private inholdings within the boundaries of the National or State reservations shown on this map.



CONTOUR INTERVAL 40 FEET
NATIONAL GEODETIC DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



QUADRANGLE LOCATION

1	2	3
4	5	6
7	8	9

ADJOINING 7.5' QUADRANGLE NAMES

ROAD CLASSIFICATION
Primary highway: hard surface
Secondary highway: hard surface
Light-duty road, hard or improved surface
Unimproved road
Interstate Route: [red shield symbol]
U.S. Route: [red circle symbol]
State Route: [red circle symbol]

DOUBLE POINT, CA
1994

NIMA 1459 IV NE-SERIES V895



RECEIVED
DEC 8 1 1999
U.S. GEOLOGICAL SURVEY
HISTORICAL MAP ARCHIVES