


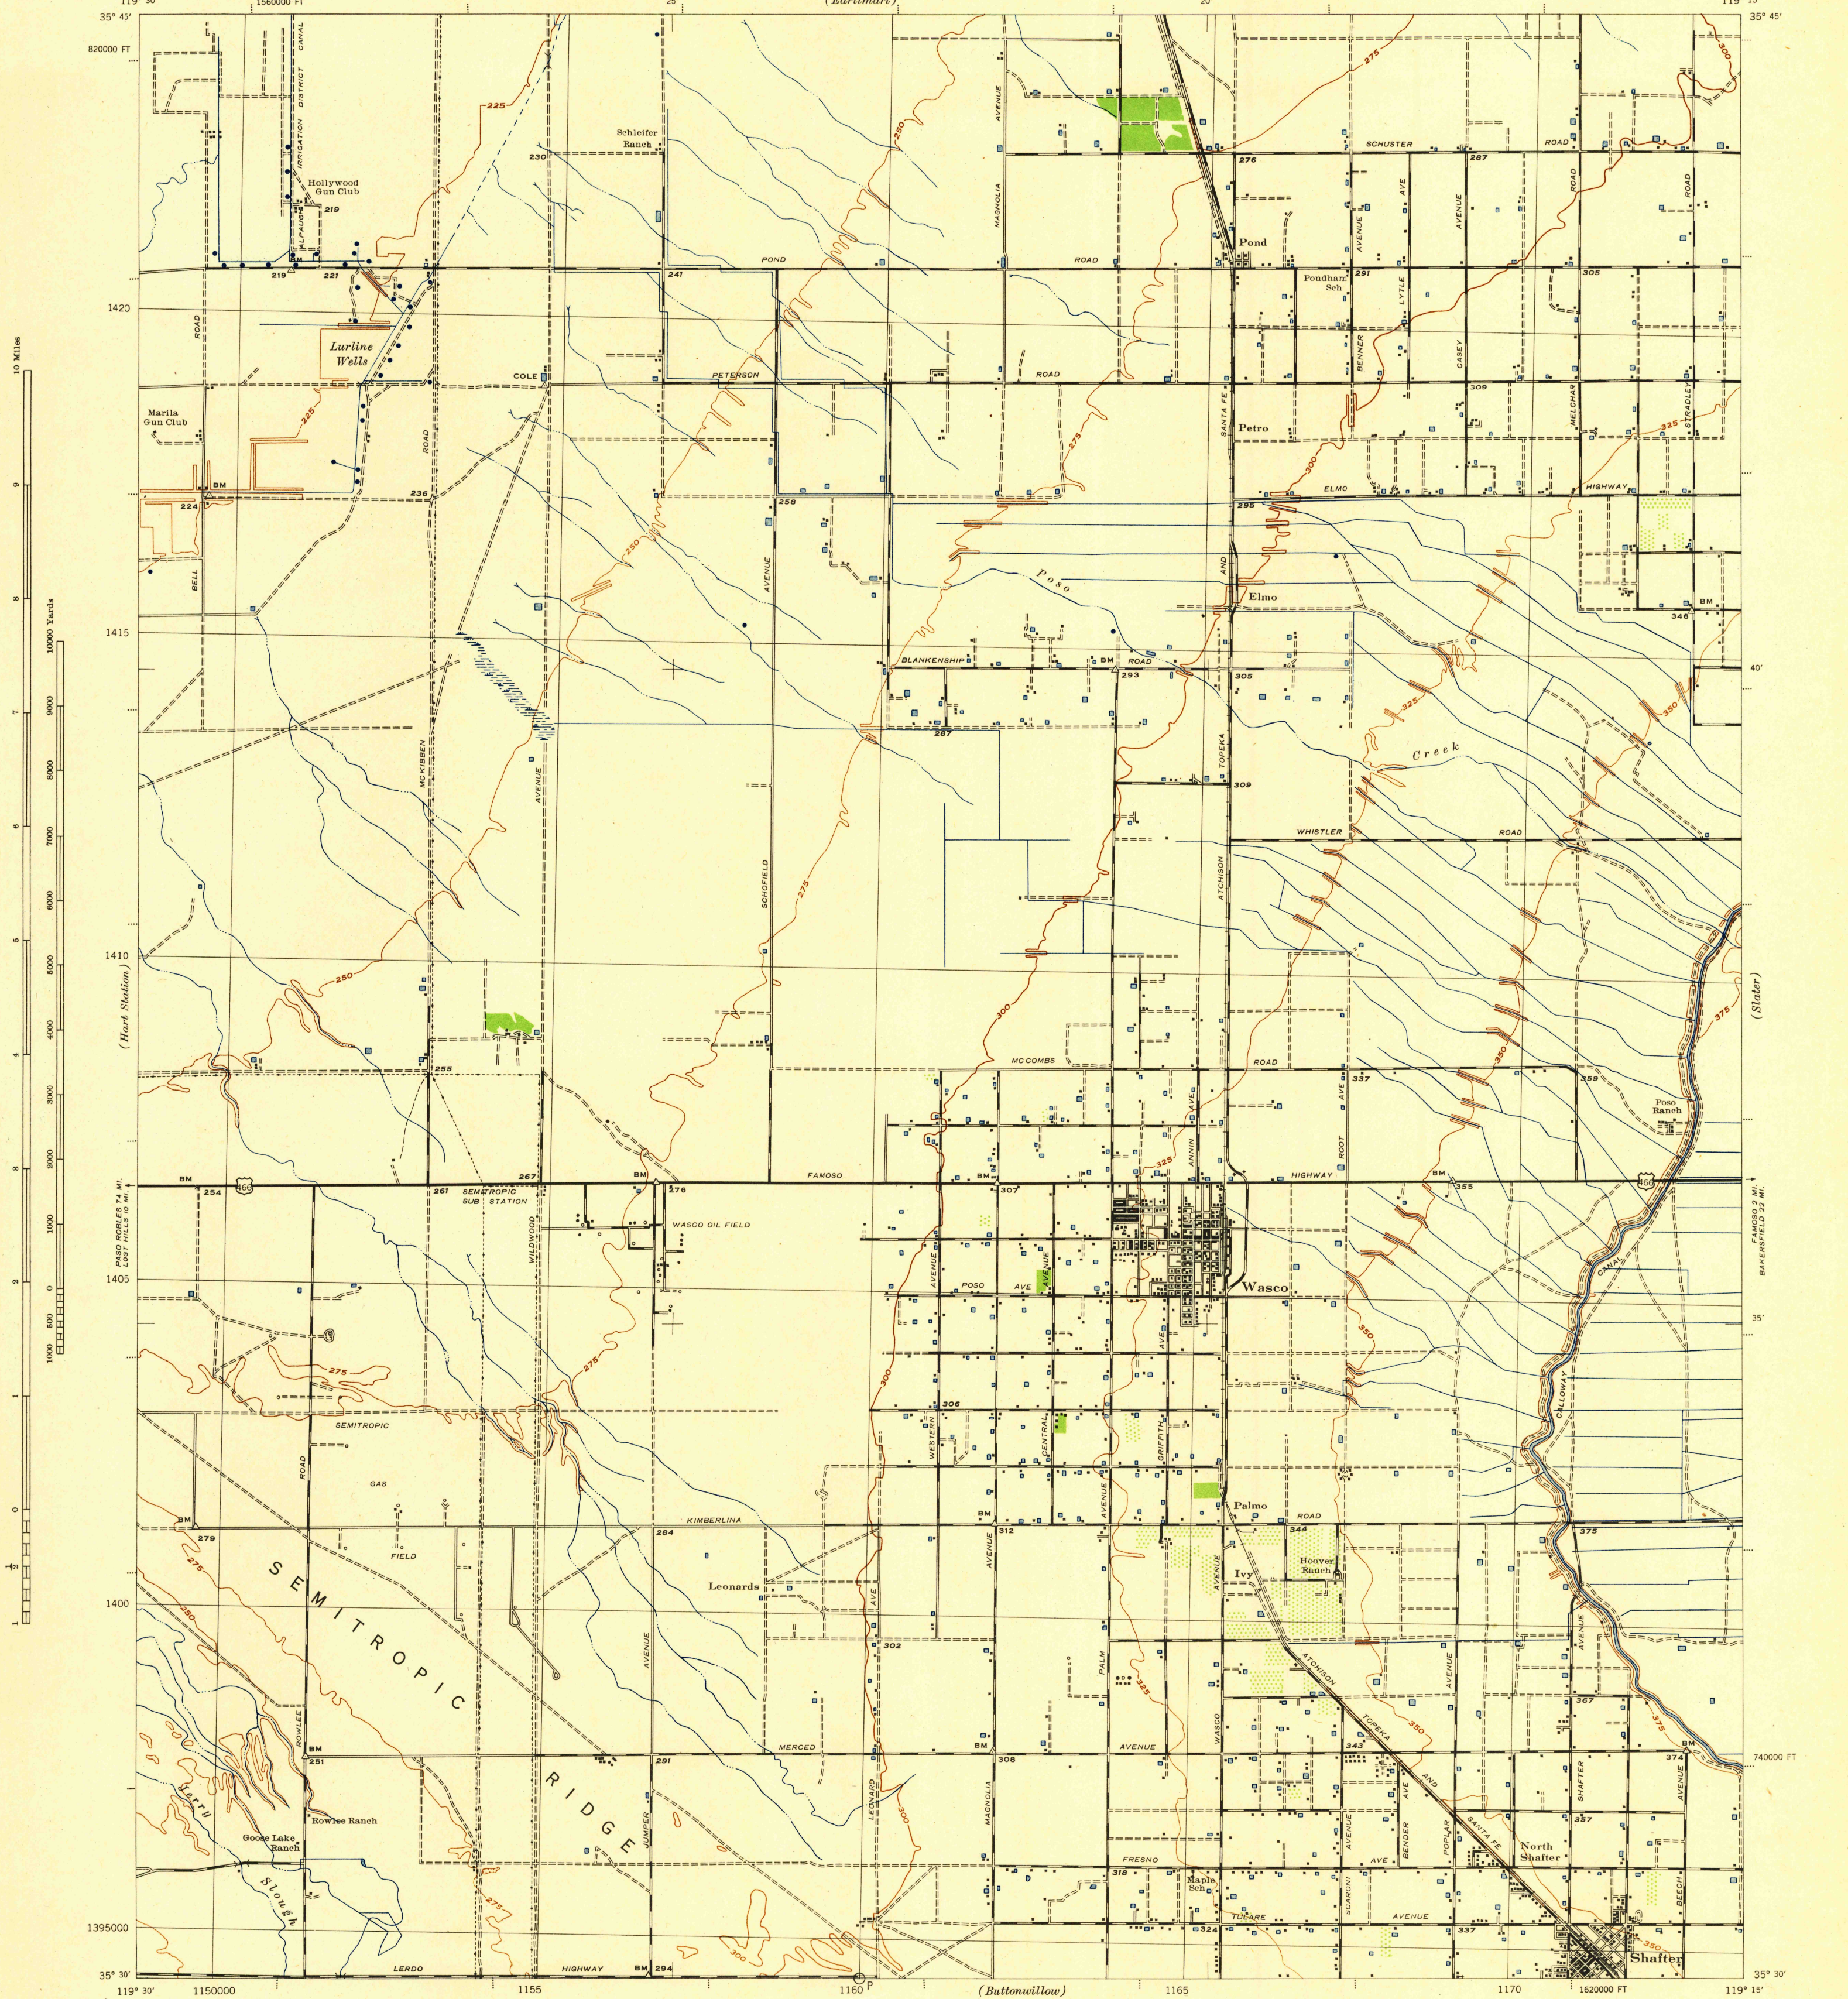

Prepared under the direction of the Chief of Engineers, U. S. Army, 1942.
Control by U. S. Geological Survey, 1927.
Topography by U. S. Geological Survey, 1927.
Planimetric detail revised by 29th Engineers, U. S. Army, 1942.
Photography by Agricultural Adjustment Administration, 1937.
Polyconic Projection, North American 1927 Datum.

ROAD CLASSIFICATIONS
Dependable hard surface, heavy duty road
Secondary, hard surface, all weather road
Loose surface graded, dry weather road
Dirt road
More than two lanes indicated by note with tick at point of change.
Road Data 1942

U. S. Route 146
State Route 1
2 LANE 1 LANE

Scale 1/62500
Contour interval 25 feet
Datum is mean sea level

1 0 1000 2000 3000 4000 5000 6000 Yards

1 0 1 2 3 4 5 Miles

FIVE THOUSAND YARD GRID COMPUTED FROM "GRID SYSTEM FOR PROGRESSIVE MAPS OF THE U. S. ZONE 'G', U. S. C. & G. S. SPECIAL PUBLICATION NO. 59 (THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED).
CALIFORNIA STATE GRID ZONE S IS INDICATED BY DOTTED TICKS OUTSIDE THE NEAT LINE AT 10,000 FOOT INTERVALS.
NOTE: OFFICERS USING THIS MAP WILL MARK HEREON CORRECTIONS AND ADDITIONS WHICH COME TO THEIR ATTENTION AND MAIL DIRECTLY TO THE CHIEF OF ENGINEERS, WASHINGTON, D. C.

APPROXIMATE MEAN DECLINATION 1943
FOR CENTER OF SHEET
ANNUAL MAGNETIC CHANGE 0.2' DECREASE
USE DIAGRAM ONLY TO OBTAIN NUMERICAL VALUES. TO DETERMINE MAGNETIC NORTH LINE, CONNECT THE POINT "P" ON THE SOUTH EDGE OF THE MAP WITH THE VALUE OF THE ANGLE BETWEEN GRID AND MAGNETIC NORTH AS PLOTTED ON THE DEGREE SCALE AT THE NORTH EDGE OF THE MAP.

RESTRICTED
WASCO, CALIF.
N3530-W11915/15

USGS
HISTORICAL FILE
TOPOGRAPHIC DIVISION