


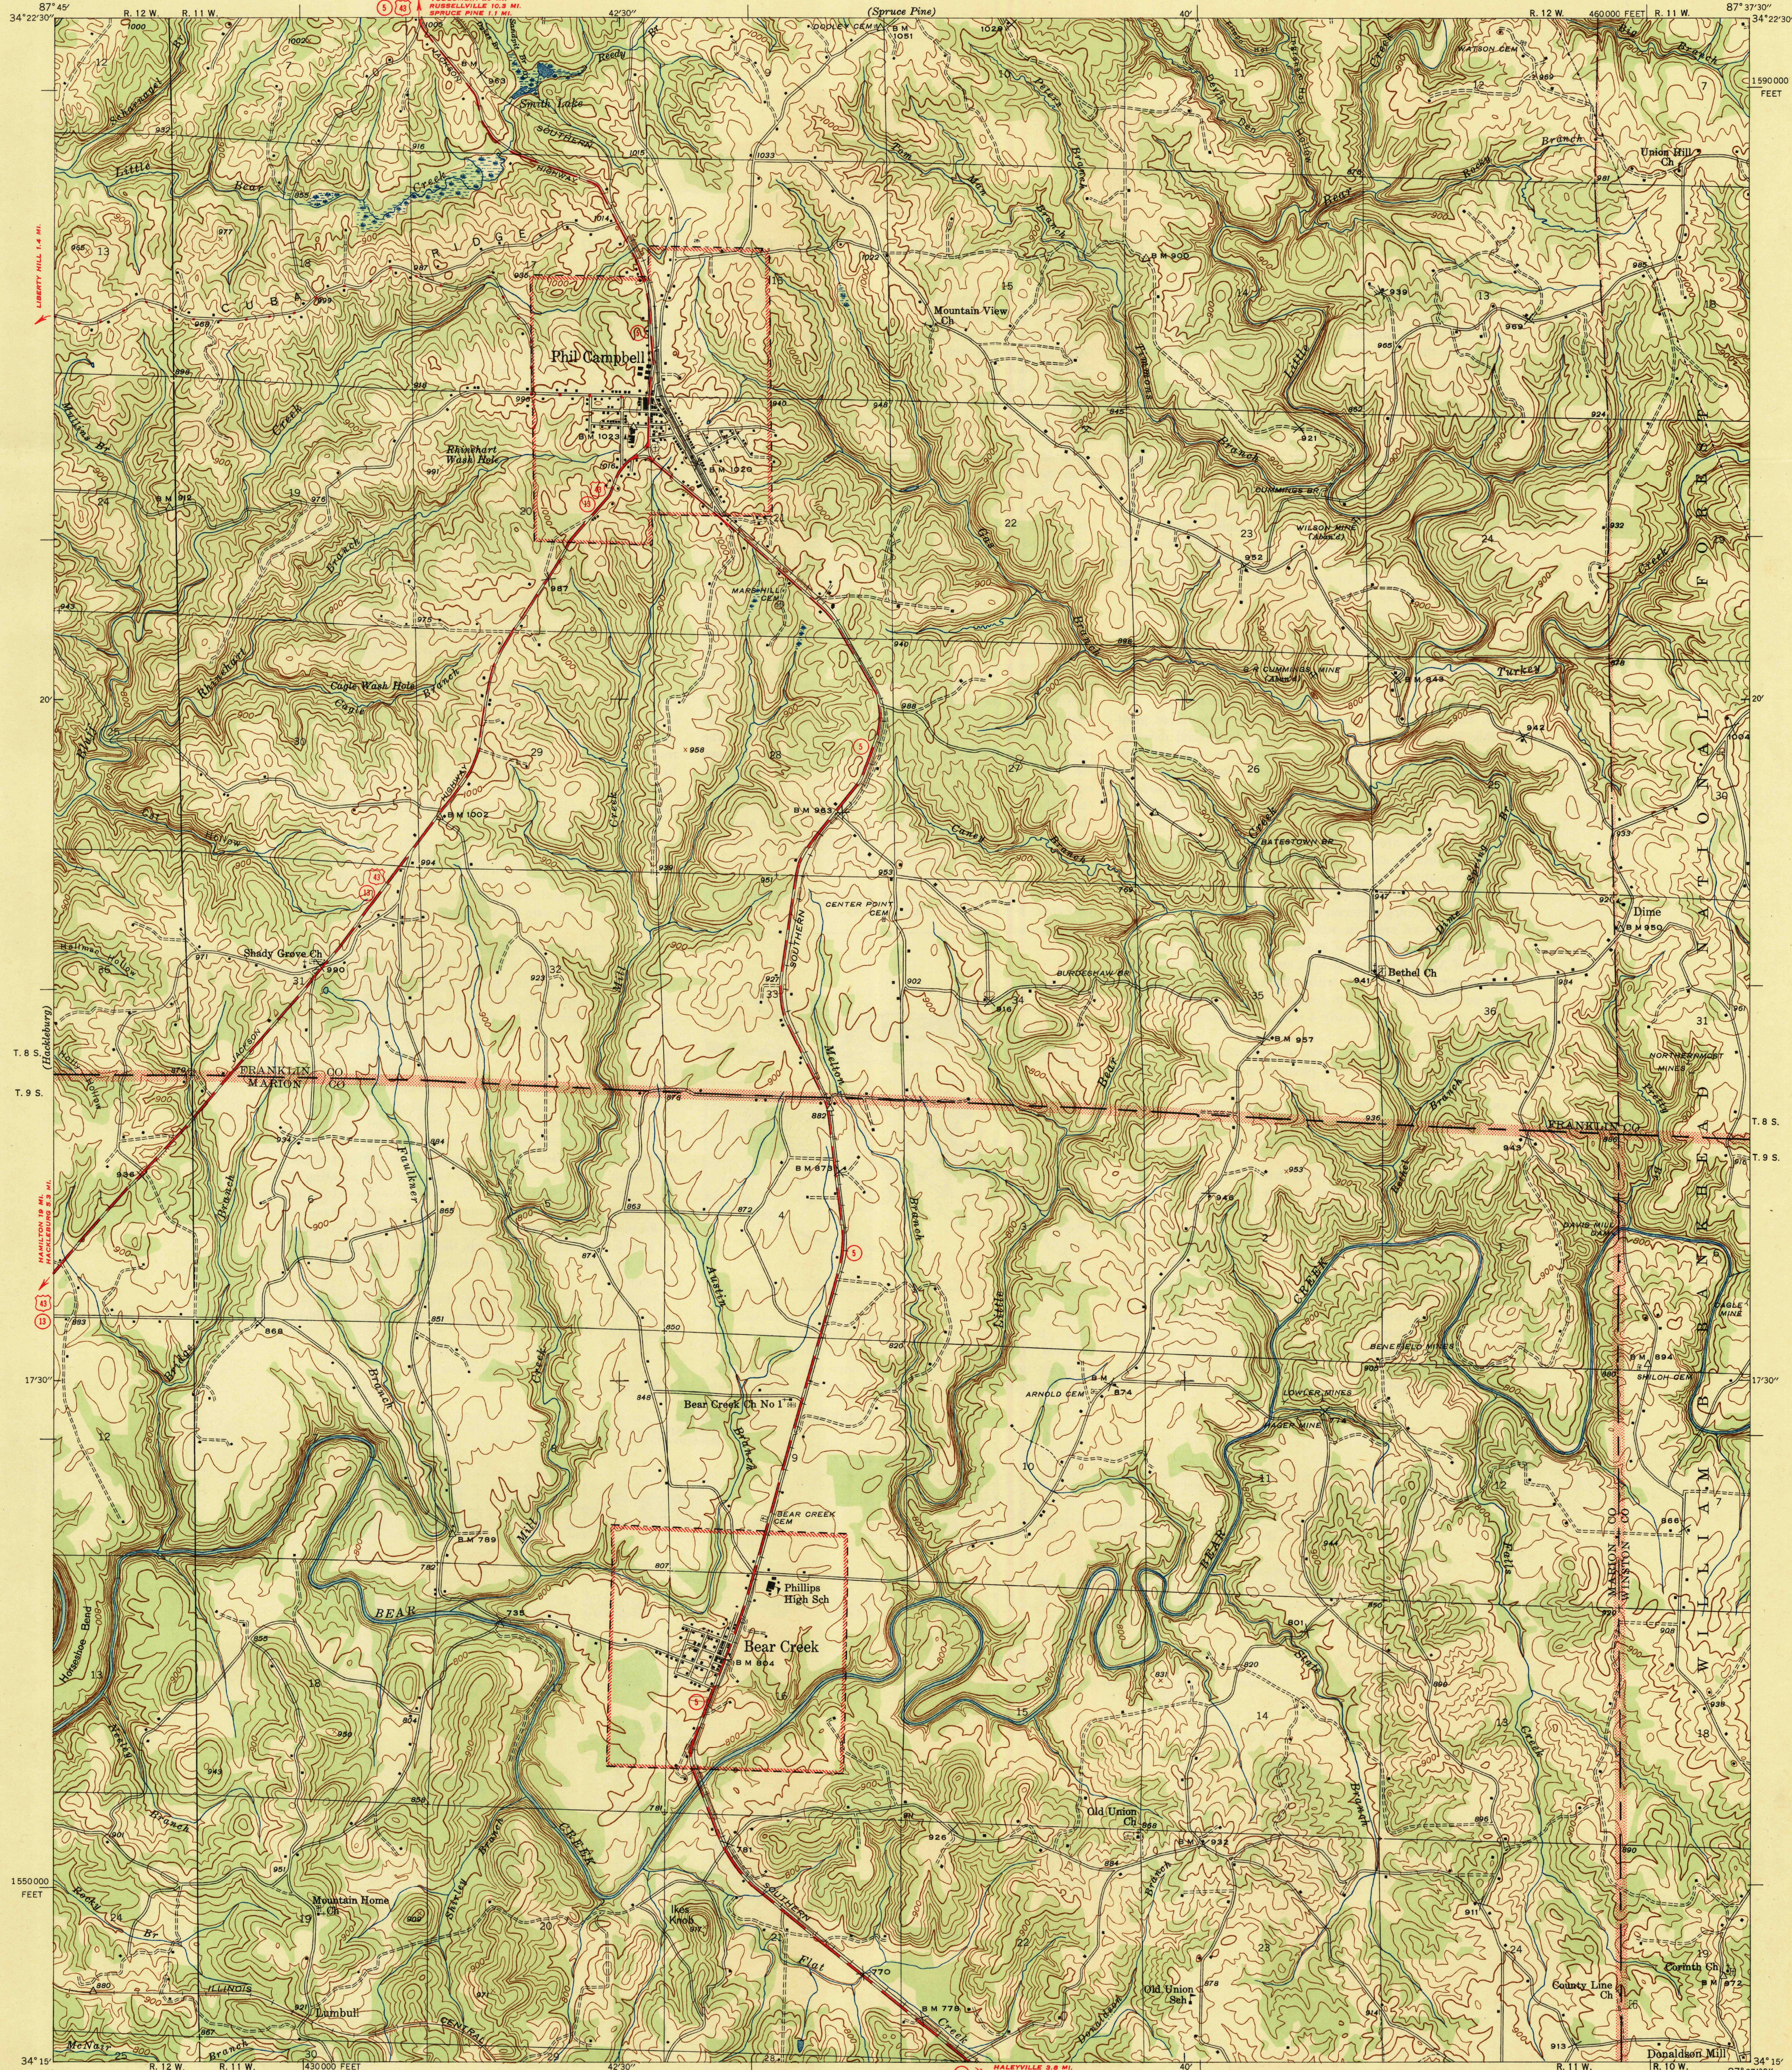

Mapped by the Geological Survey  
1946

ROAD CLASSIFICATION  
Dependable hard surface  
Heavy-duty road  
Secondary hard surface  
All-weather road  
Dirt road  
Dry weather roads  
Unimproved, graded  
Unimproved, gravel  
Dirt road  
U.S. Route  
State Route  
More than two lanes indicated along road with tick at point of change

TRUE NORTH  
MAGNETIC NORTH  
APPROXIMATE MEAN  
DECLINATION, 1946

Scale 1:24,000  
0 500 1000 1500 2000 2500 3000 3500 4000 4500 5000 5500 6000 6500 7000 7500 8000 8500 9000 9500 10000  
0 1000 2000 3000 4000 5000 6000 7000 8000 9000 10000  
0 1 2 3 4 5 6 7 8 9 10  
0 1 2 3 4 5 6 7 8 9 10  
Contour interval 20 feet  
Datum is mean sea level

U.S.G.S.  
FILE COPY  
Transcription and Editing

USGS  
Historical File  
Topographic Division

Polyconic projection, 1927 North American datum  
10000 foot grid based on Alabama (West)  
rectangular coordinate system

PHIL CAMPBELL, ALA.  
Edition of 1947

HISTORICAL  
JUL 17 1947

N 3415-W8737.5/7.5  
2190