



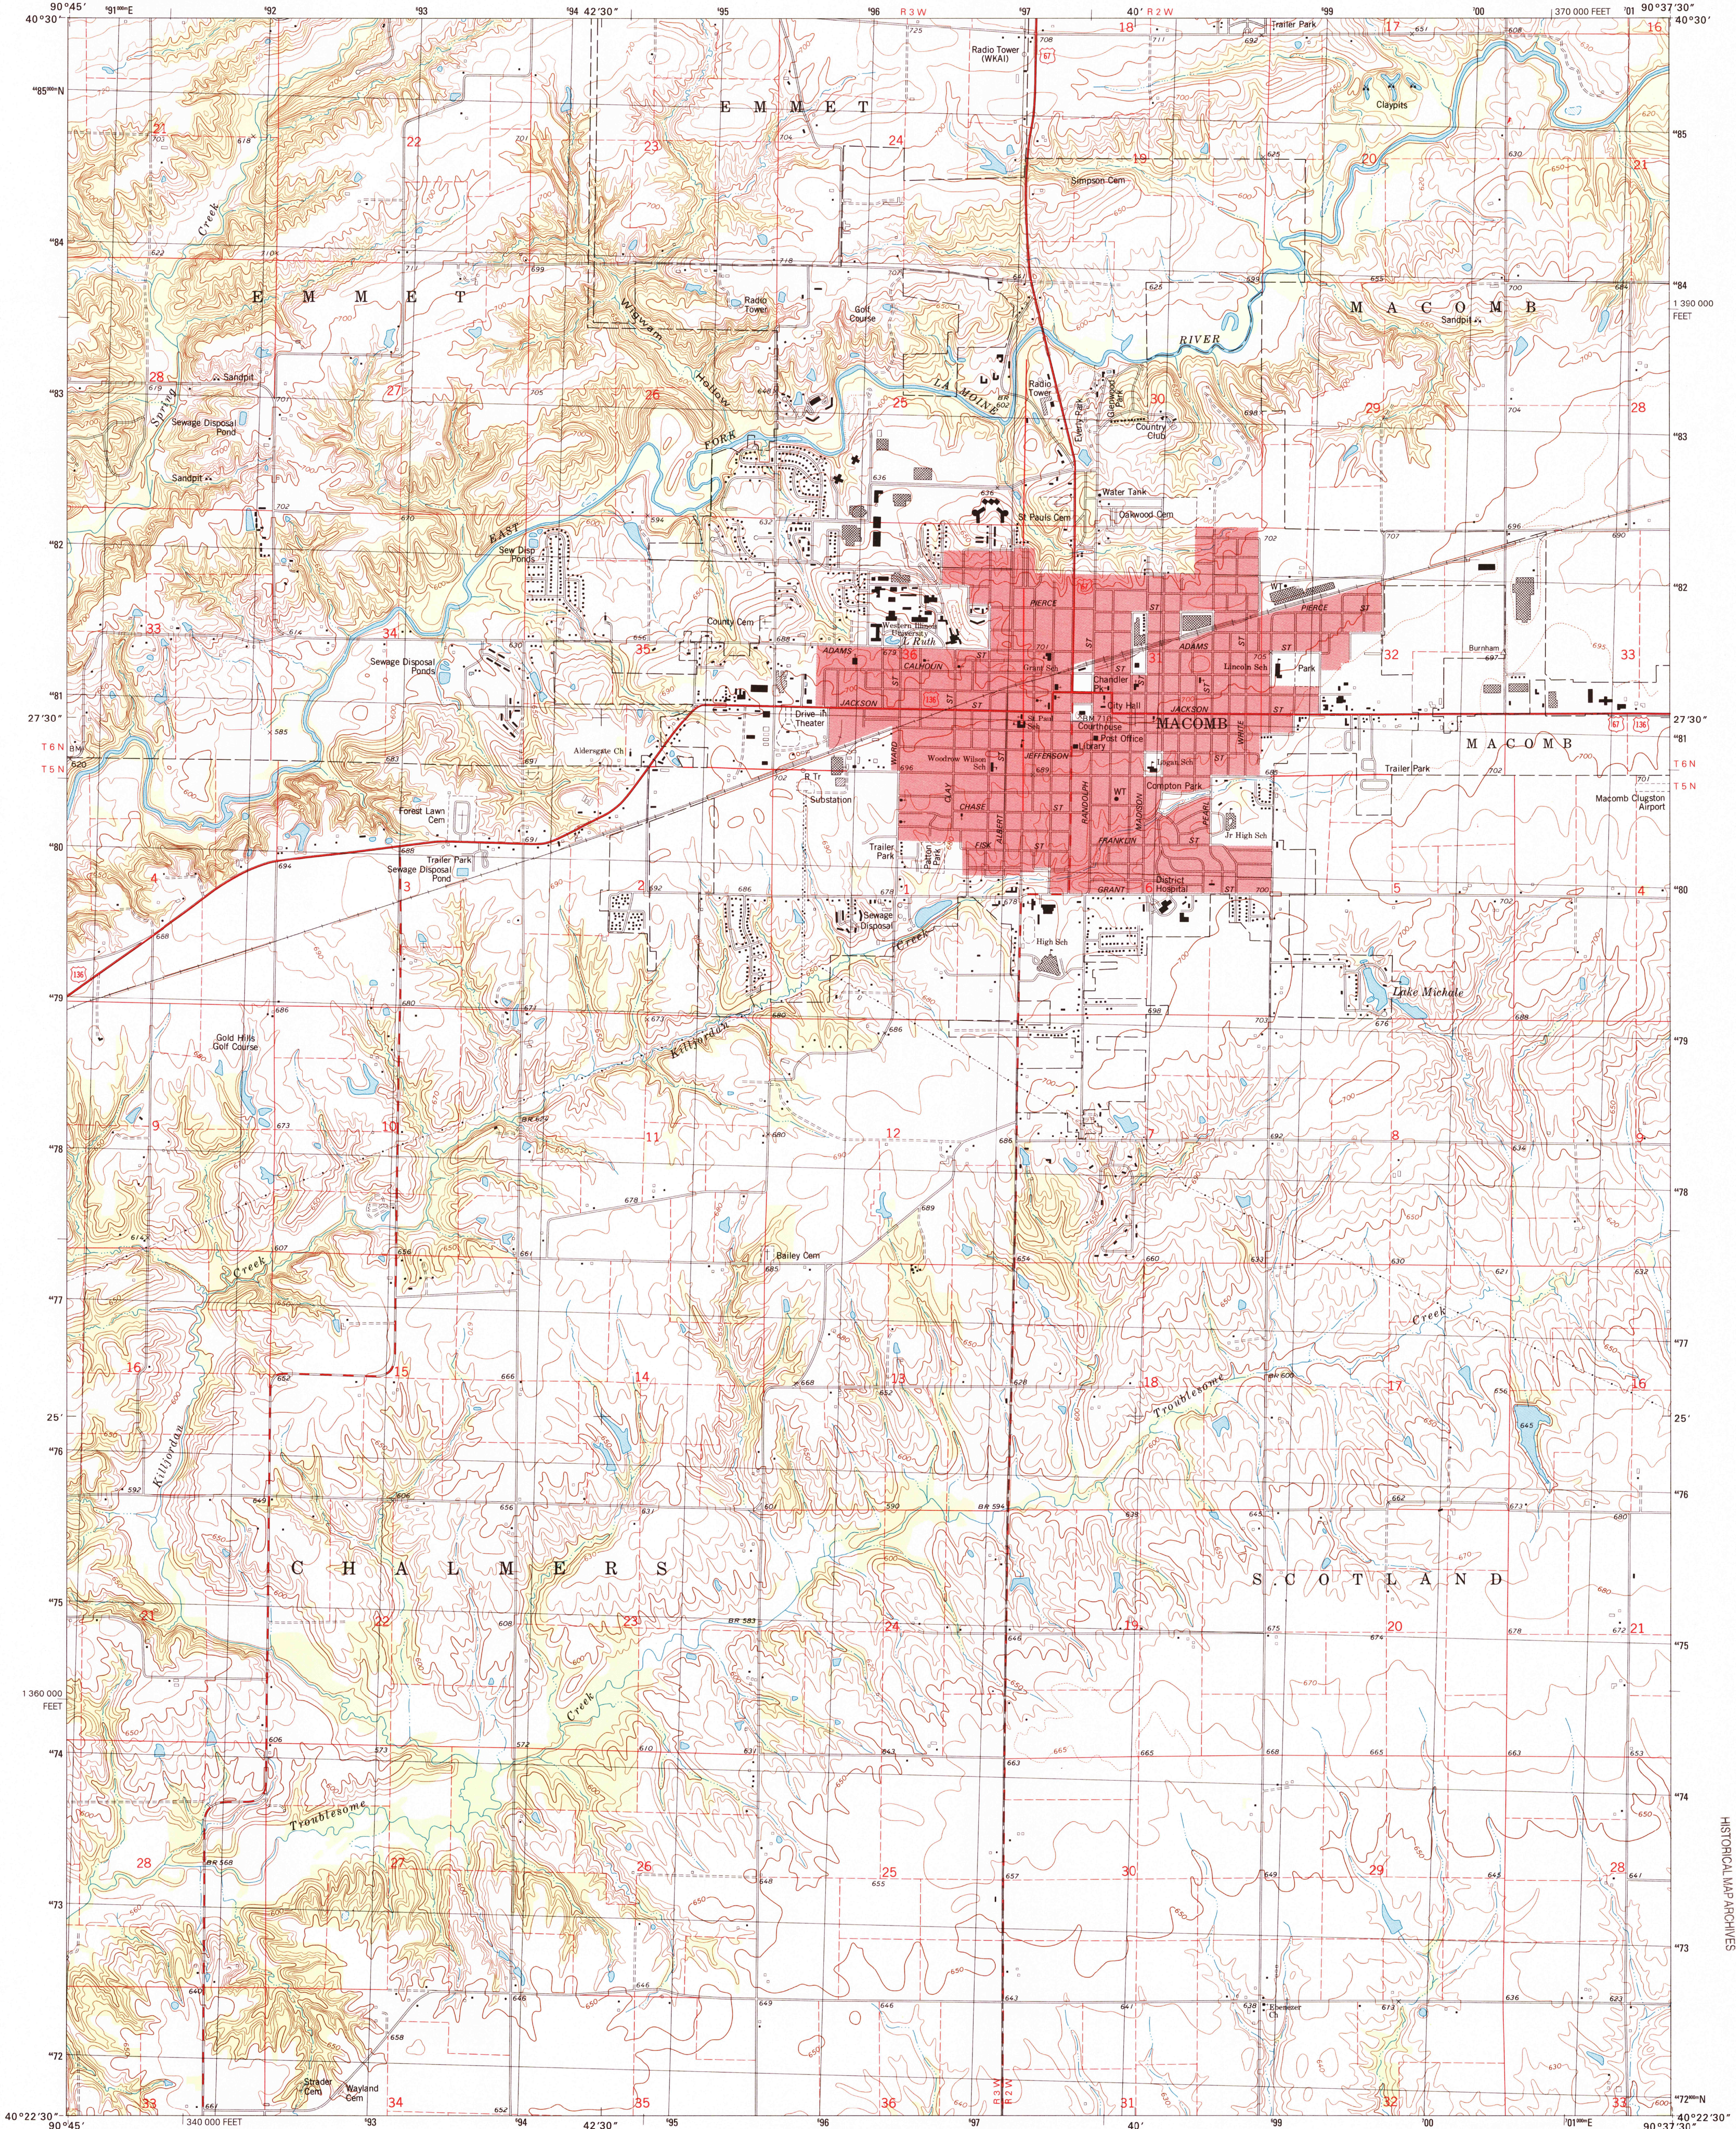

Produced by the United States Geological Survey
Derived from imagery taken 1973 and other sources. Photocopied using imagery taken 1997; no major culture or drainage changes observed. PLSS and survey control current as of 1974. Boundaries, other than corporate, revised 1998.
North American Datum of 1927 (NAD 27). Projection and 10 000-foot ticks: Illinois coordinate system, west zone (transverse Mercator).
1000-meter Universal Transverse Mercator grid, zone 15.
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.

UTM GRID AND 1999 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET
1°30' 27 MILS
1/8" 9 MILS

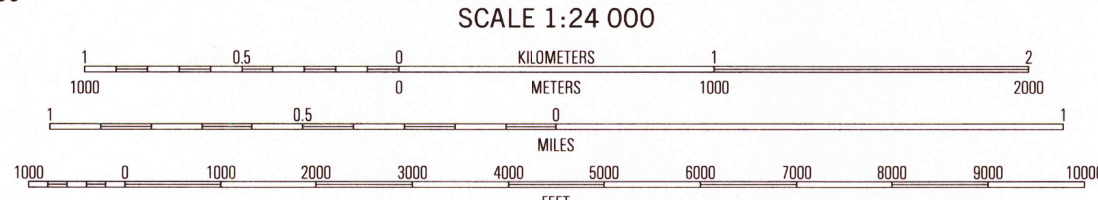

CONTOUR INTERVAL 10 FEET
DOTTED LINES REPRESENT 5 FOOT CONTOURS
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225
AND ILLINOIS GEOLOGICAL SURVEY, CHAMPAIGN, ILLINOIS 61820
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



QUADRANGLE LOCATION

1	2	3
4	5	6
7	8	

ADJOINING 7.5' QUADRANGLE NAMES

ROAD CLASSIFICATION

- Primary highway, hard surface
- Secondary highway, hard surface
- Unimproved road
- Light-duty road, hard or improved surface
- Interstate Route
- U.S. Route
- State Route

MACOMB, IL
1997

NIMA 2864 I NW-SERIES V863

RECEIVED
MAR 31 1999
USGS NMD
HISTORICAL MAP ARCHIVES

