

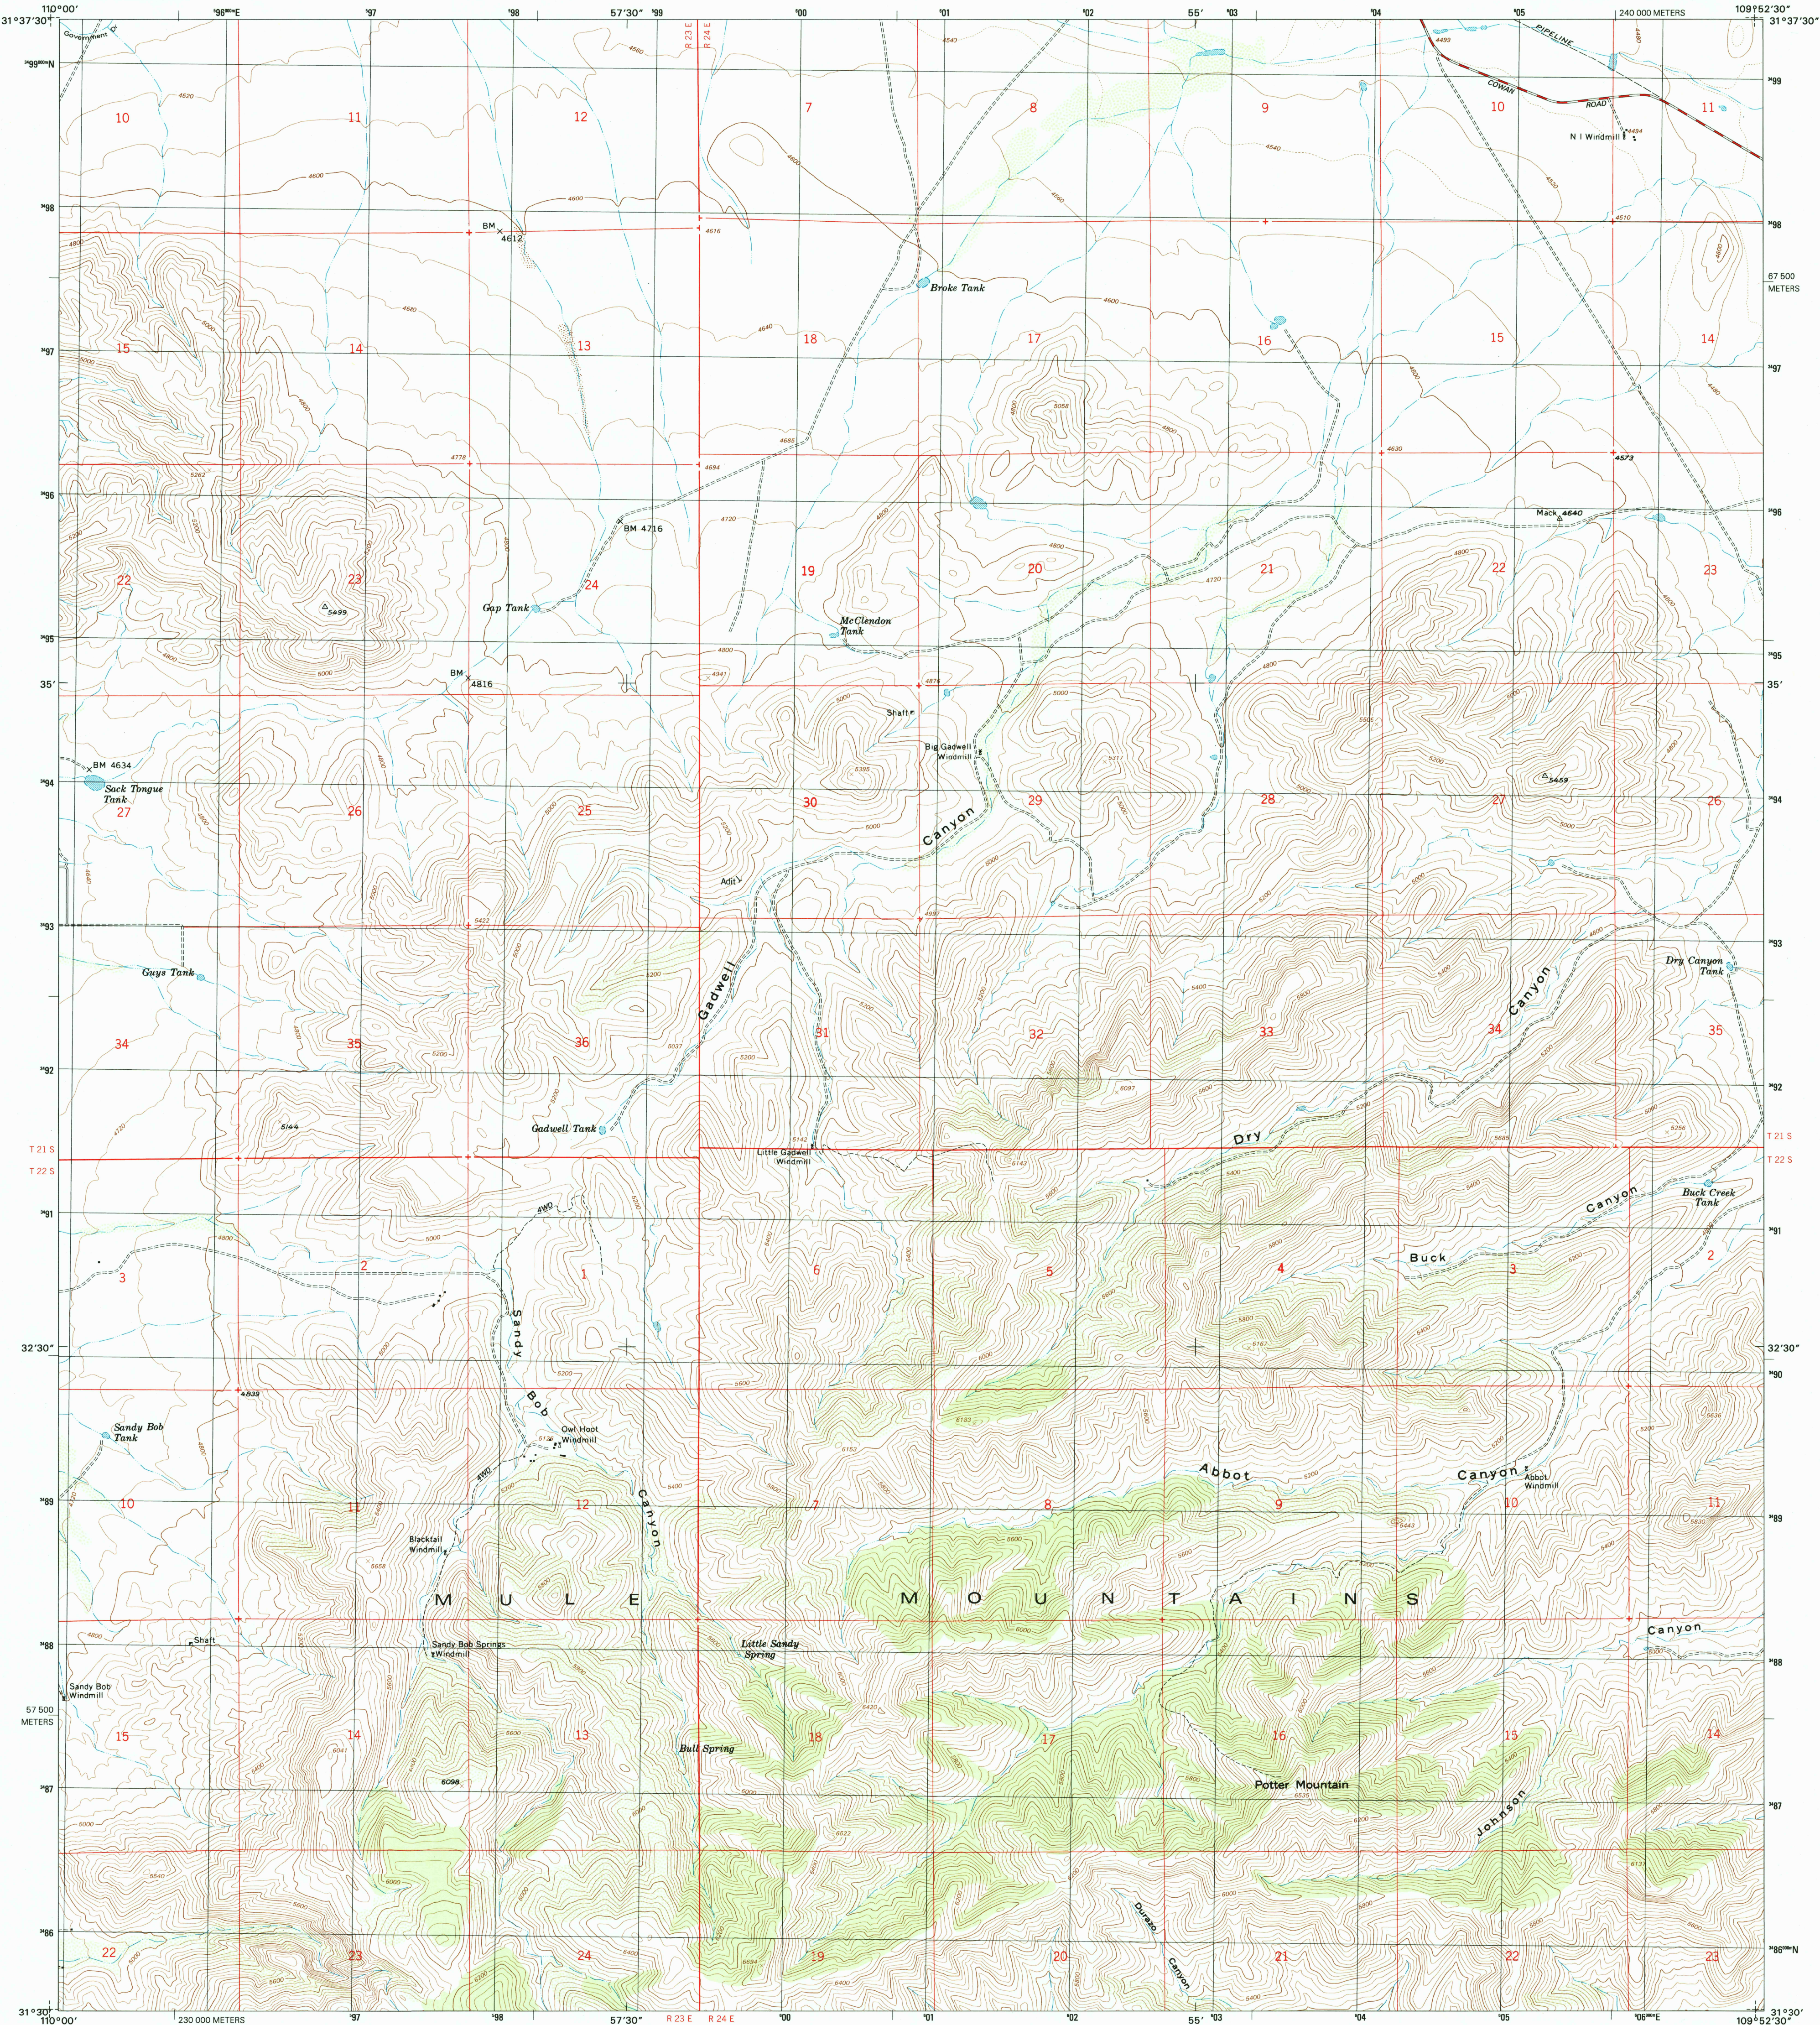


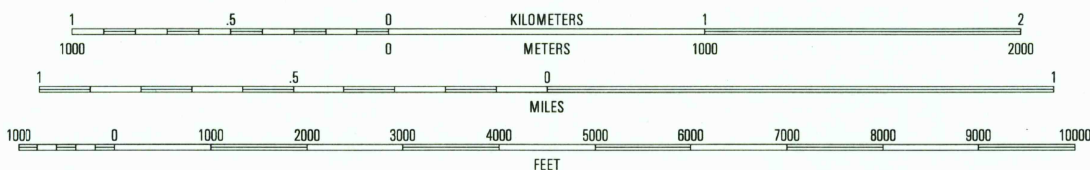

Produced by the United States Geological Survey
Topography compiled 1956. Planimetry derived from imagery taken 1996 and other sources. Public Land Survey System and survey control current as of 1958. Boundaries current as of 2000. North American Datum of 1983 (NAD 83). Projection and 1000-meter grid: Universal Transverse Mercator, zone 12. 2500-meter ticks: Arizona Coordinate System of 1983 (east zone).
North American Datum of 1927 (NAD 27) is shown by dashed corner ticks. The values of the shift between NAD 83 and NAD 27 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.



CONTOUR INTERVAL 40 FEET
SUPPLEMENTARY CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
(TO CONVERT ELEVATIONS TO THE NORTH AMERICAN VERTICAL DATUM OF 1988, ADD 3 FEET)
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
Primary highway: hard surface (dashed line), improved surface (solid line), hard surface (dotted line)
Light-duty road, hard or improved surface (solid line)
Unimproved road (dashed line)
Interstate Route (thick red line with shield), U.S. Route (red line with shield), State Route (red line with circle)

RECEIVED
APR 3 0 2002

HISTORICAL MAP ARCHIVES

POTTER MOUNTAIN, AZ
1996

1	2	3	1 Tombstone
			2 Hay Mountain
			3 Owl Mountain
4		5	4 Tombstone SE
			5 Gleason SE
			6 Herford
6	7	8	7 Blabee NE
			8 Blabee NE

ADJOINING 7.5' QUADRANGLE NAMES

NIMA 4047 III SW-SERIES V898

