


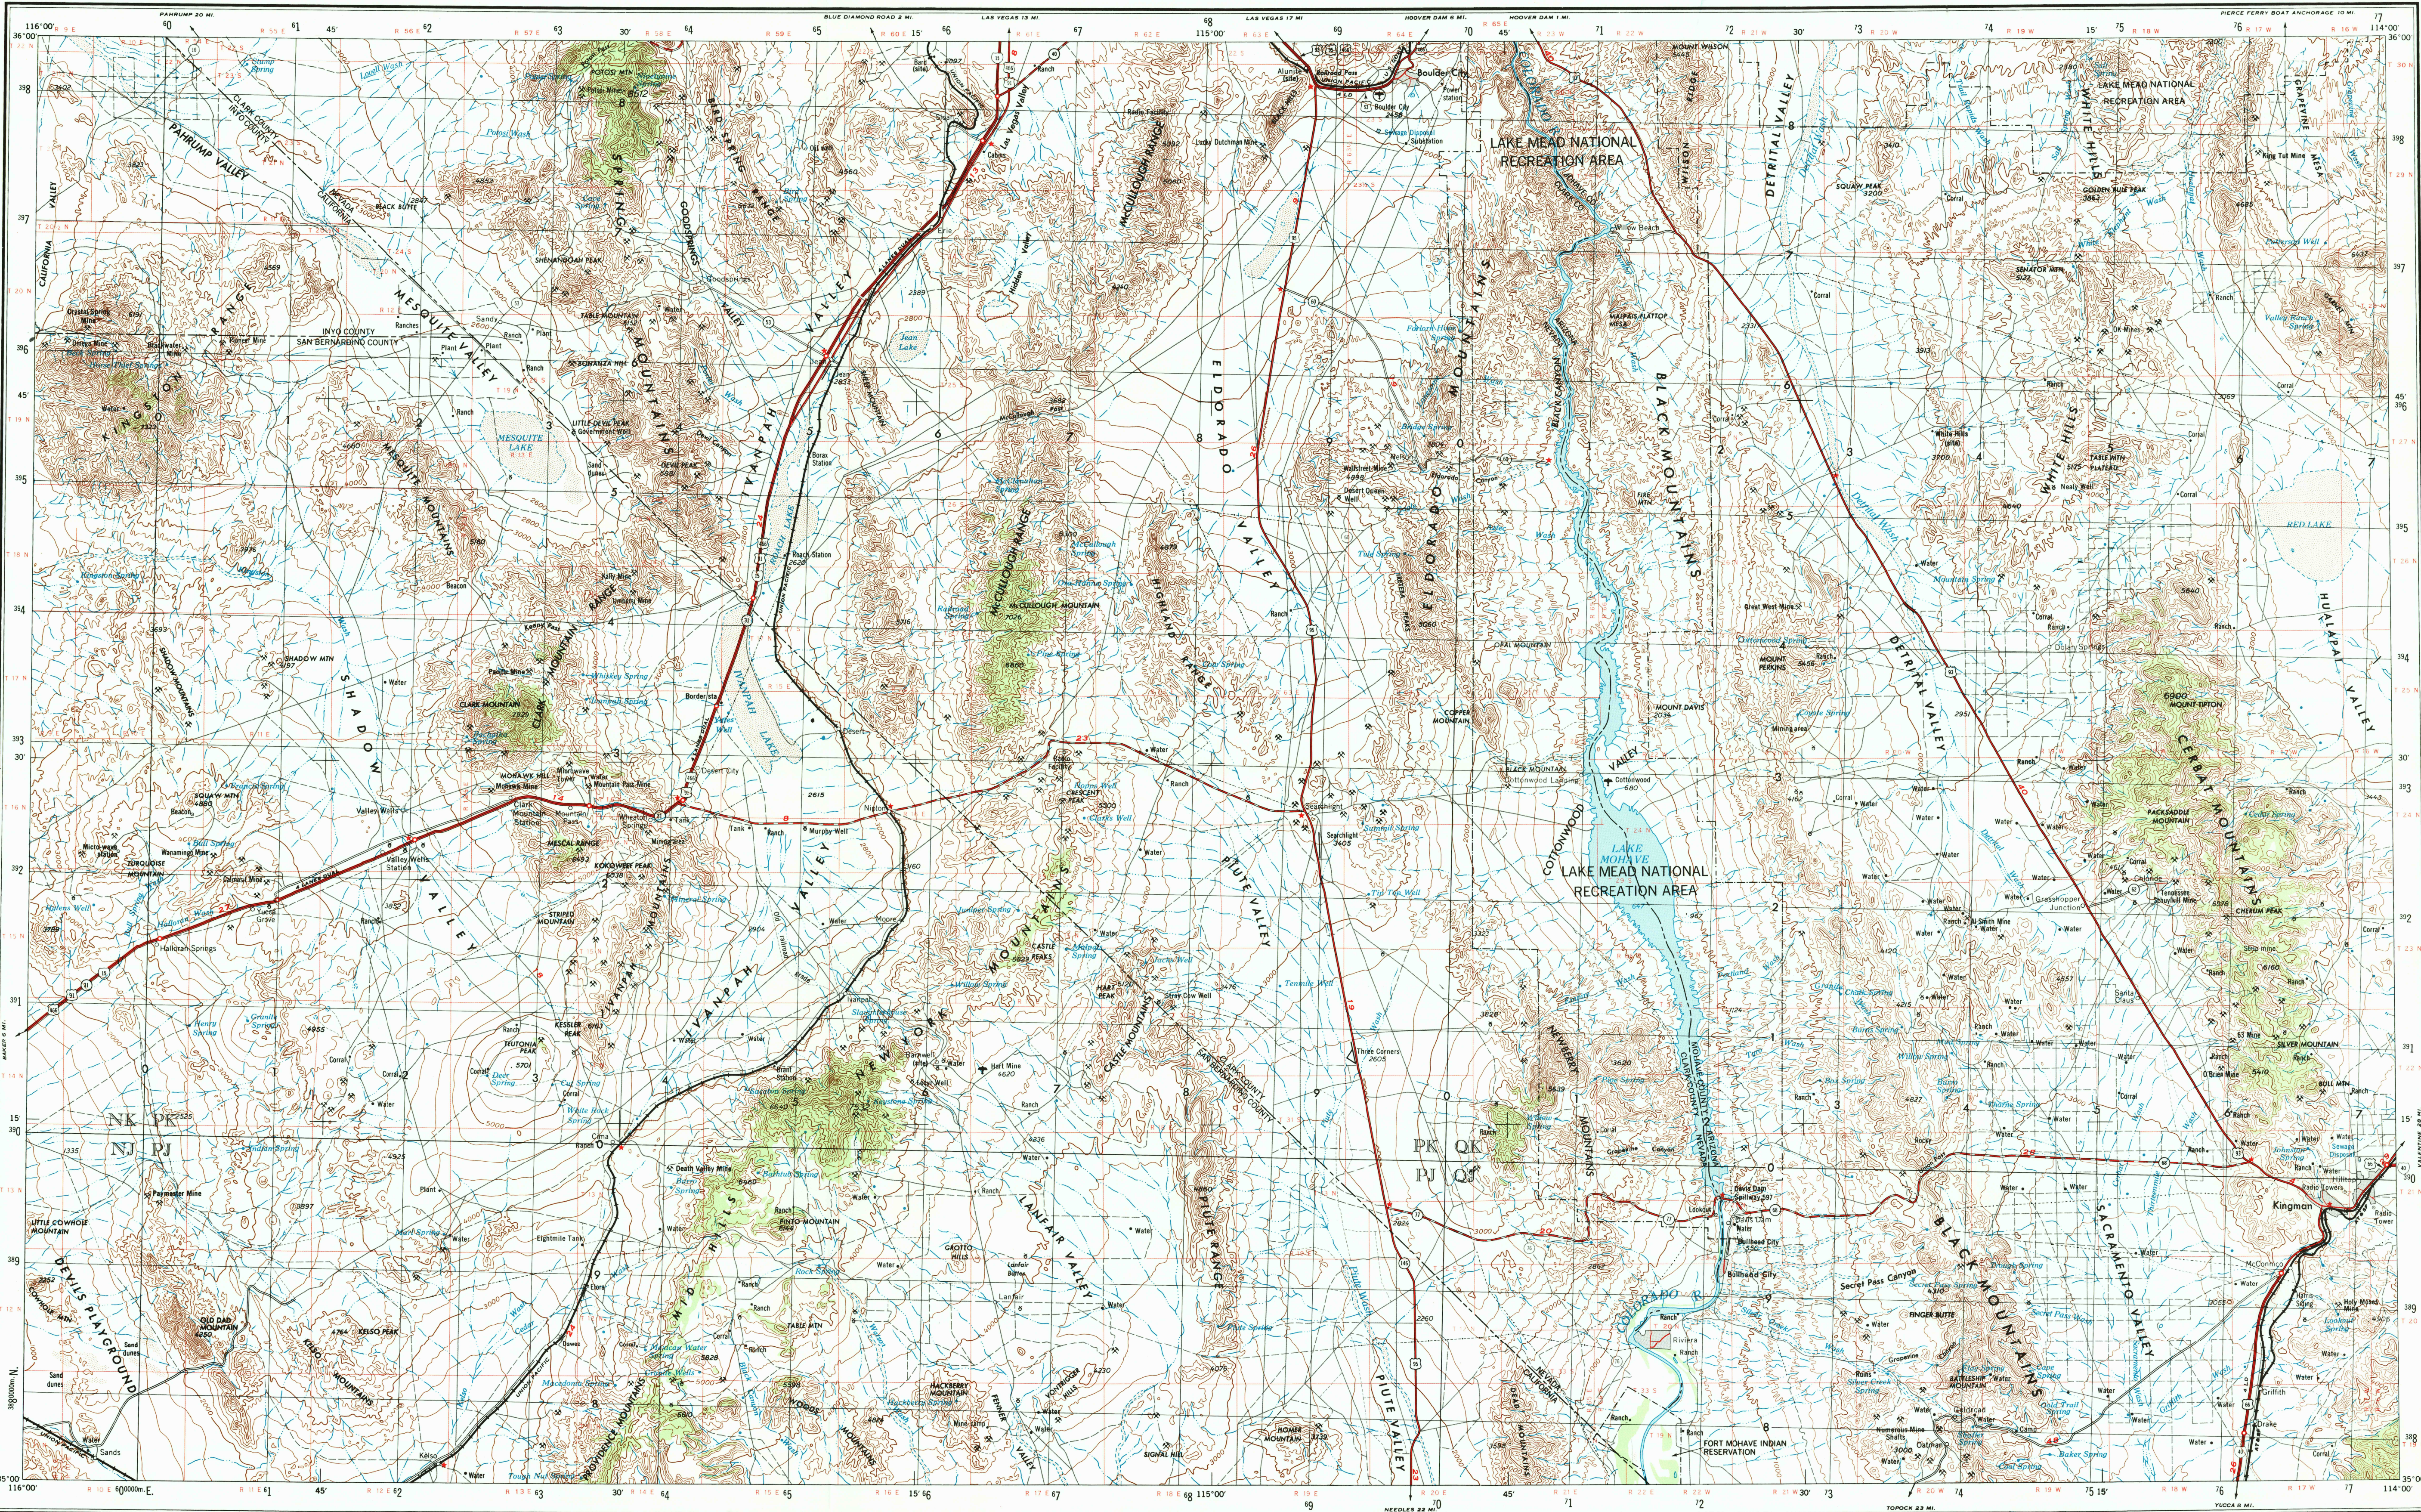

V502, EDITION 5
Prepared by the U.S. Army Topographic Command (CGSX), Washington, D.C. Compiled in 1956 by photogrammetric methods and from United States quadrangles, 1:62,500, 1950. Planimetry revised from aerial photographs taken 1954. Photographs field annotated 1954. Revised by the U.S. Geological Survey 1969.
Location of aerodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

RAILROADS

Standard gauge
Narrow gauge
Intermodal
State
County
Park or reservation

ROADS

Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, hard or improved surface
Fair or dry weather, unimproved surface
Trail
Interchange

Route markers: Interstate, U.S., State

Landmarks: School, Church, Other

Water features: Lake, Reservoir, Pond, Stream, Marsh or swamp, Intermittent or dry stream, Power line

Other features: Landing area, Seaplane airport, Dry lake, Woods-brushwood

Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles

0 5 10 15 20 25 30 Kilometers

0 5 10 15 20 25 30 Nautical Miles

CONTOUR INTERVAL 200 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 11

1985 MAGNETIC DECLINATION FROM TRUE NORTH FOR THIS SHEET VARIES FROM 1°30' (180 MILS) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 1°00' (170 MILS) EASTERLY FOR THE CENTER OF THE EAST EDGE

USGS NHD HISTORICAL MAP

AUG 10 1987

REC'D FILE COPY

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR WASHINGTON, D.C. 20542

LOCATION DIAGRAM

GRID ZONE DESIGNATION: 11S

100,000 M. SQUARE IDENTIFICATION

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

GRID ZONE DESIGNATION: 11S

100,000 M. SQUARE IDENTIFICATION: NK PK QK

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS:

1. Read letters identifying 100,000 meter square in which the point lies.

2. Look for vertical grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the face itself.

3. Estimate tenths from grid line to point.

4. Look for horizontal grid line below point and read LARGE figure labeling the line either in the left or right margin, or on the face itself.

5. Estimate tenths from grid line to point.

SAMPLE REFERENCE:

If reporting beyond 10° in any direction, prefix Grid Zone Designation, ex: 3800000

11S180000

KINGMAN, ARIZONA; NEVADA; CALIFORNIA

1954

REVISED 1969