


UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

NEBRASKA
(SEWARD COUNTY)
SEWARD QUADRANGLE


U.S.G.S.
FILE COPY
Inspection and Editing

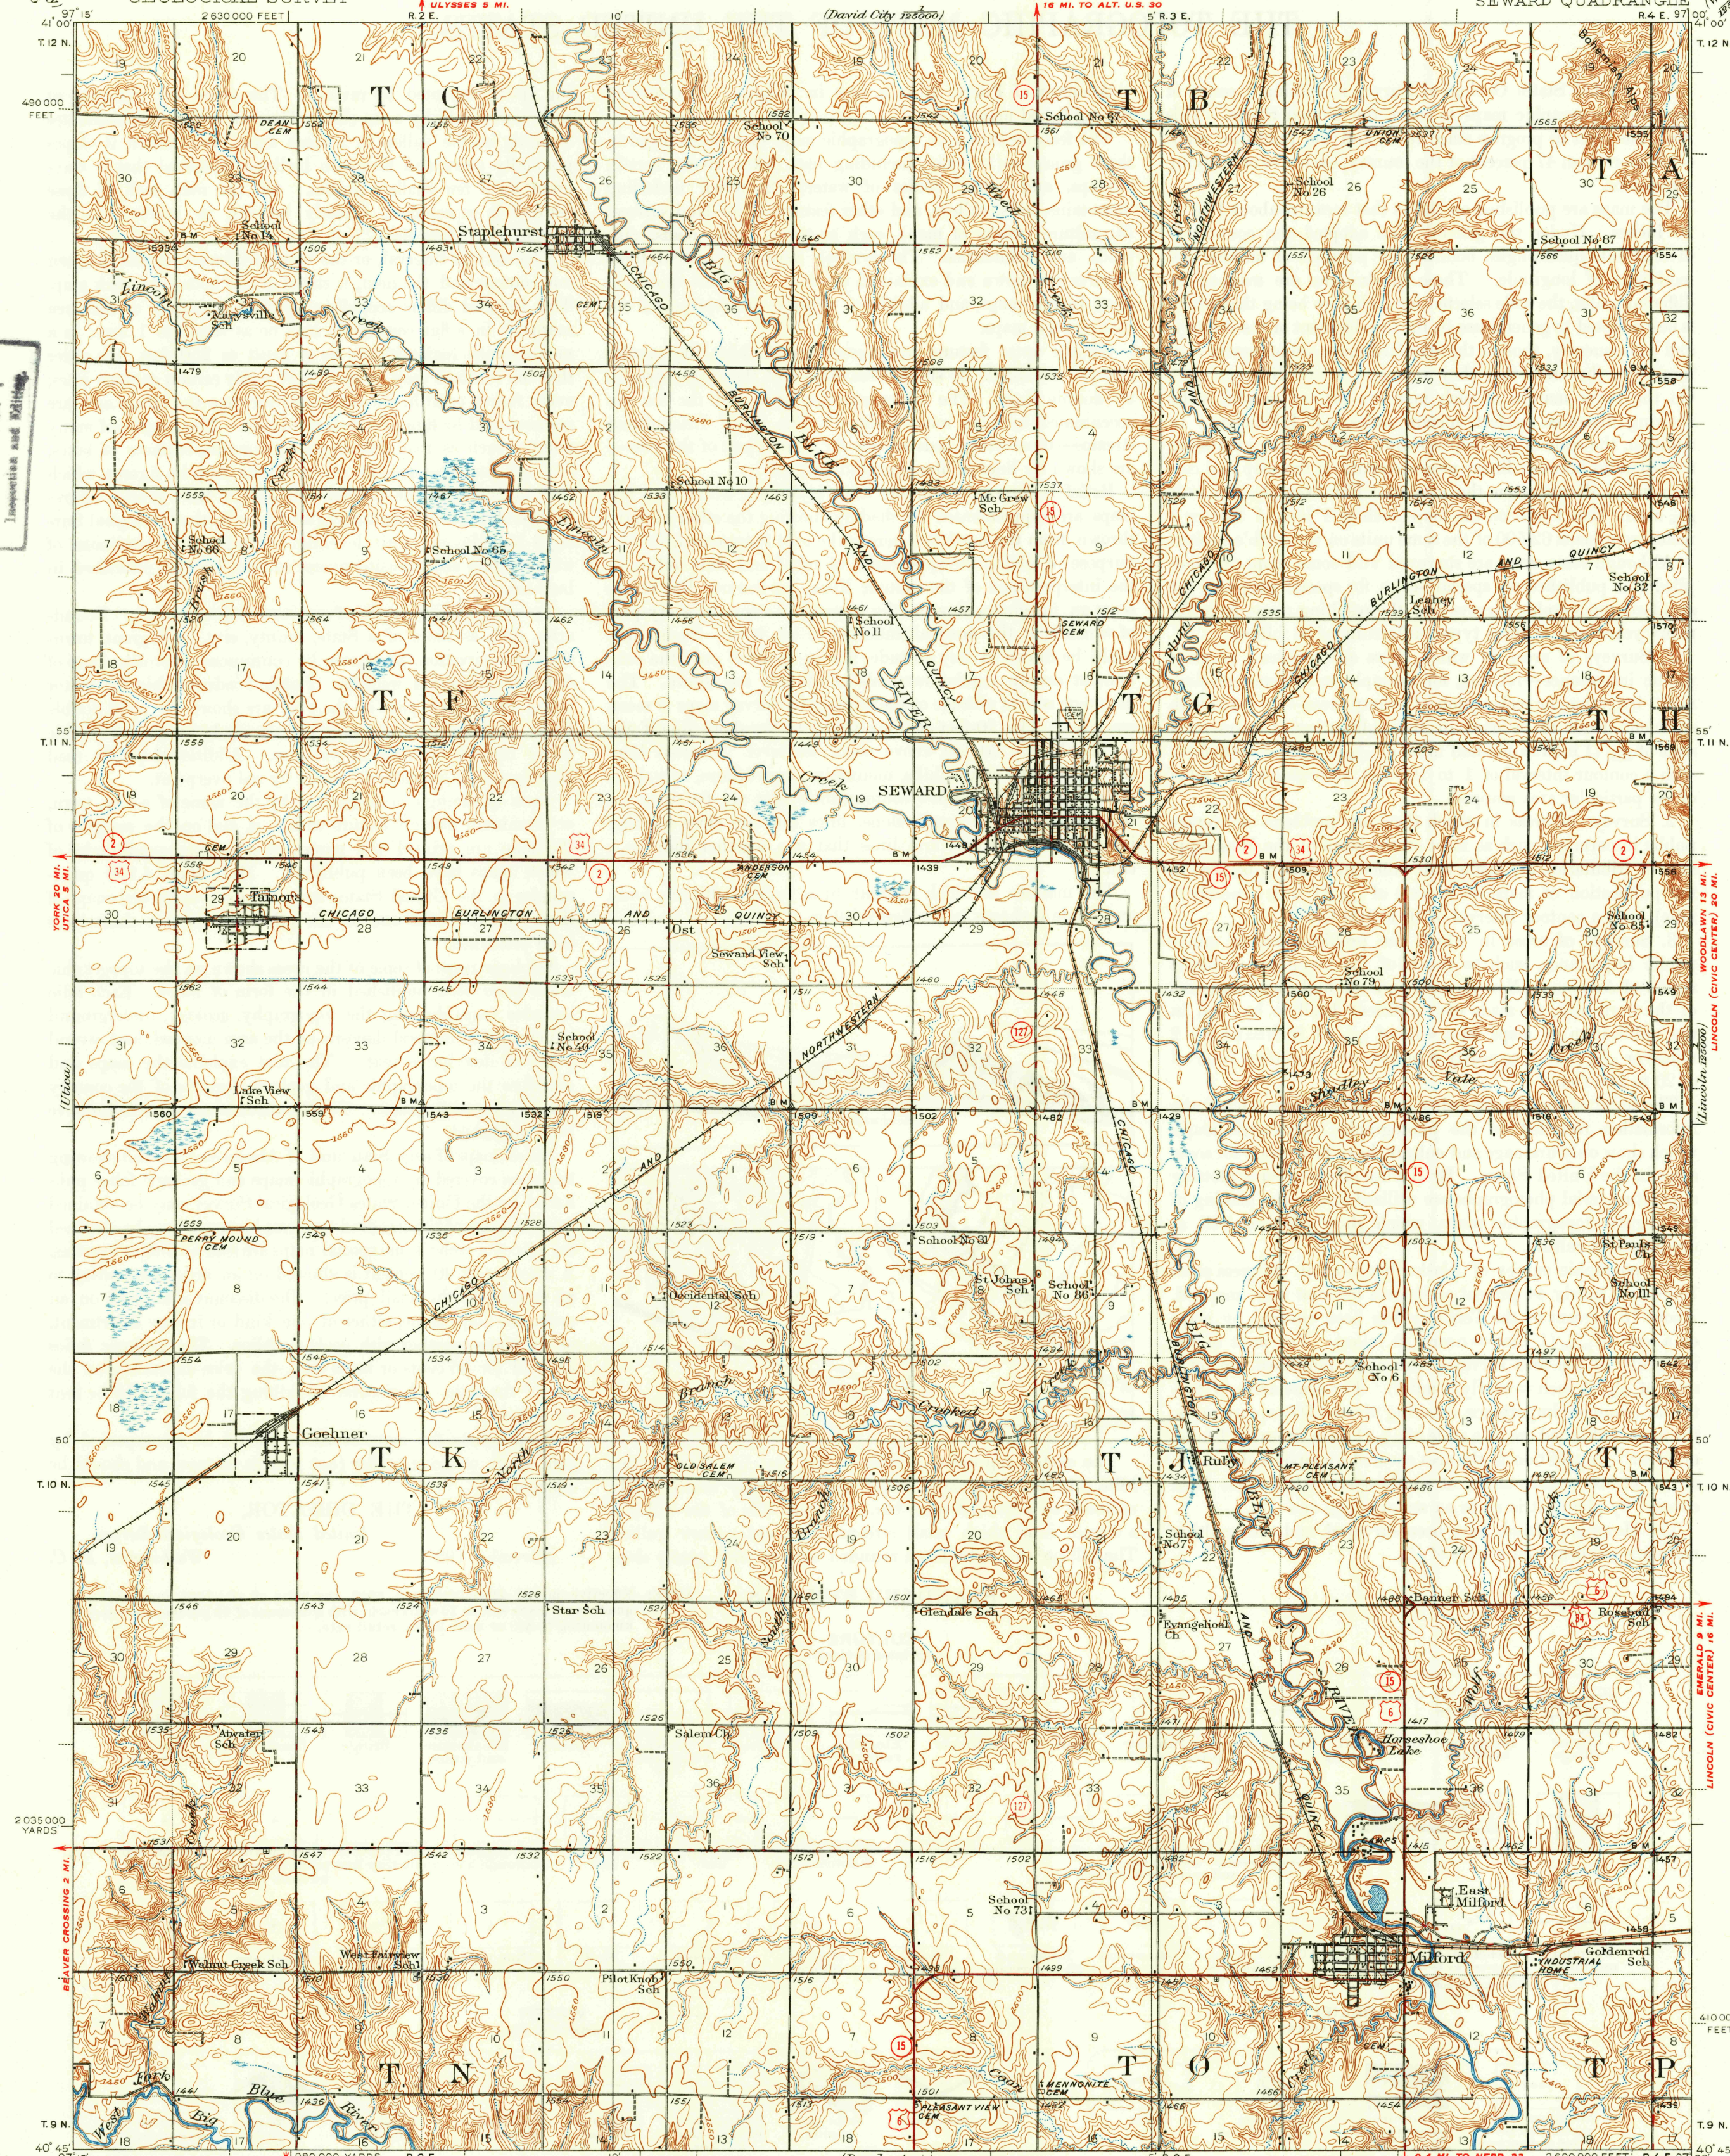

Topography by T.V. Cummins, H.E. McGlasson,
G.L. Whitaker and R.M. Still
Surveyed in 1934

ROAD CLASSIFICATION
HARD-SURFACE ALL WEATHER ROADS DRY WEATHER ROADS
Heavy-duty ——— 4 LANE 16 FEET Improved dirt ———
Medium-duty ——— 4 LANE 16 FEET Unimproved dirt ———
Loose-surface, graded, or narrow hard-surface ———
U. S. Route State Route

APPROXIMATE MEAN
DECLINATION, 1934

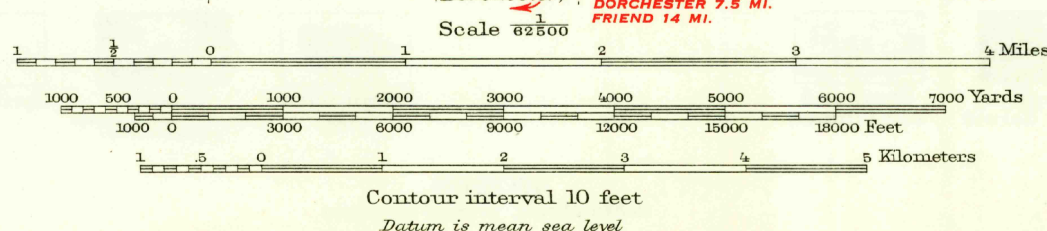

DAVID CITY 21 MI.
16 MI. TO ALT. U.S. 30
5 R. 3 E.
2690 000 FEET R. 4 E. 97 00
POLYCONIC PROJECTION, 1927 NORTH AMERICAN DATUM
5000 YARD GRID BASED ON U.S. ZONE SYSTEM D
10000 FOOT GRID BASED ON NEBRASKA (SOUTH)
RECTANGULAR COORDINATE SYSTEM

U.S.G.S.
FILE COPY
Inspection and Editing

SEWARD, NEBR.
Edition of 1939
reprinted 1950
N4045-W9700/15