

To convert feet to meter
multiply by .3048

To convert meters to feet
multiply by 3.2808

1. Dryland
2. Wetlands (May be partially submerged at mean high tide)
3. Exposed at mean low tide



Produced by the United States Geological Survey
National Ocean Survey
Control by the USGS and NOS/NOAA

Orthophotomap prepared from aerial photograph taken January 18, 1976. Compiled by photogrammetric methods from aerial photographs taken January 1975 and planetable surveys 1981. Field checked 1976. Map edited 1982

Map shows topographic features as of January 1976

Bathymetry compiled by the National Ocean Survey from tide-coordinated hydrographic surveys

This information is not intended for navigational purposes

Mean low water (dotted) line and mean high water (solid) line compiled by the National Ocean Survey from aerial photographs

Shoreline (shoreline of mean low water) shown as of 1976 by photogrammetry


Projection and 10,000-foot grid ticks: Florida coordinate system, north zone (Lambert conformal conic)

1:000-meter United States Transverse Mercator grid, zone 16

1927 North American Datum

To place on the predicted North American Datum 1983 move the projection lines 19 meters south and the grid ticks 19 meters north

There may be private inholdings within the boundaries of the National or State reservations shown on this map

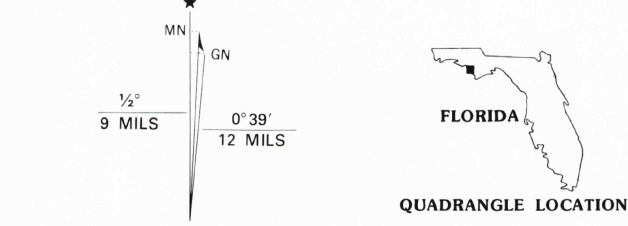


Survey Number	Survey Date	Survey Scale	Survey Line Spacing (Naut. Miles)
H-5782	1935	1:10,000	02--07
H-5783	1935	1:10,000	01--06
H-6894	1947	1:20,000	02--10
H-7173	1947	1:10,000	01--15
H-7631	1947	1:40,000	15--20
H-7633	1947	1:40,000	05--76
H-9735	1977-78	1:20,000	05--12

SCALE 1:24 000

The scale bar is divided into four units: Kilometers (0 to 5), Meters (0 to 2000), Miles (0 to 1), and Feet (0 to 10000). The Kilometers scale has markings at 0, 1, 2, 3, 4, and 5. The Meters scale has markings at 0, 500, 1000, 1500, and 2000. The Miles scale has markings at 0, 1, and 2. The Feet scale has markings every 1000 units from 0 to 10000.

CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
DASHED SUPPLEMENTARY CONTOURS ARE APPROXIMATE
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY
0.5 METER CONTOURS - DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.4 METER

BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC
ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
AND NATIONAL OCEAN SURVEY, ROCKVILLE, MARYLAND 20852
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

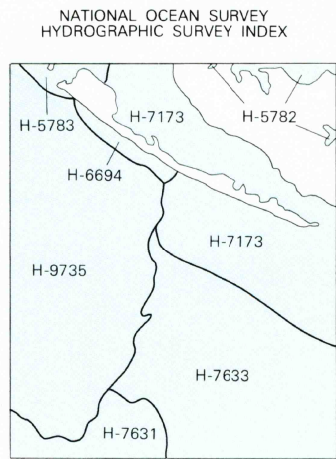

ROAD CLASSIFICATION

Primary highway, hard surface _____ Secondary highway, hard surface _____	Light-duty road, hard or improved surface _____ Unimproved road _____
--	---

Trails _____


 Interstate Route


 U. S. Route


 State Route


 County Route

CONTOURS AND ELEVATIONS IN METERS

BEACON BEACH, FLA.
30085-A6-TB-024
1982
DMA 3844 II SW-SERIES V8470

30°00'
30"
(CROOKED ISLAND)
3043 / NE
APR 10 1984