



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

STATE OF FLORIDA

CROOKED ISLAND QUADRANGLE
FLORIDA—BAY CO.
7.5 MINUTE SERIES
(TOPOGRAPHIC—BATHYMETRIC)

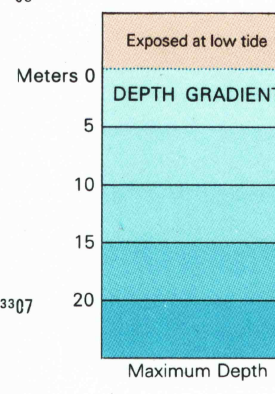


Produced by the United States Geological Survey
Derived from imagery taken 1975 and other sources. Photoinspected
using imagery taken 1994; no major culture or drainage changes
observed. PLSS and survey control current as of 1978
Boundaries verified 1998
North American Datum of 1927 (NAD 27). Projection and
10 000-foot ticks: Florida coordinate system, north zone
(Lambert conformal conic)
1000-meter Universal Transverse Mercator grid, zone 16
North American Datum of 1983 (NAD 83) is shown by dashed
corner ticks. The values of the shift between NAD 27 and NAD 83
for 7.5-minute intersections are obtainable from National Geodetic
Survey NADCON software
Bathymetry compiled by National Ocean Service from
tide-coordinated hydrographic surveys
This information is not intended for navigational purposes
Mean low water (dotted) line and mean high water (solid) line
compiled by NOS from tide-coordinated aerial photographs
There may be private inholdings within the boundaries of
the National or State reservations shown on this map

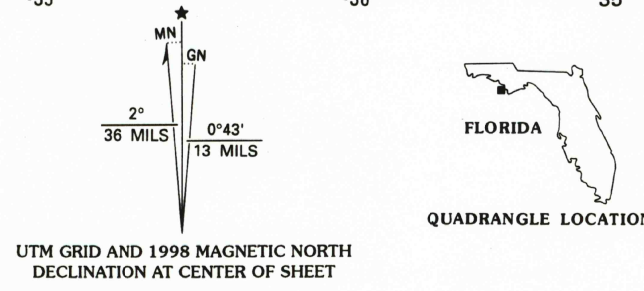


UTM GRID AND 1998 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

Survey Number	Survey Date	Survey Scale	Survey Line spacing (Naut. Miles)
H-1265a	1975	1:20,000	10-30
H-1373b	1977	1:40,000	50-1.1
H-1374b	1977	1:20,000	03-80
H-1511b	1982	1:40,000	10-80
H-7631	1947	1:40,000	15-20
H-7633	1947	1:40,000	05-26
H-9734	1977	1:20,000	03-11

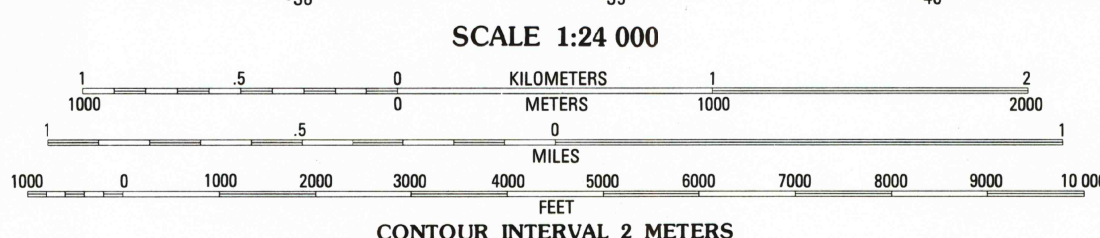

SCALE 1:24 000
CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM METERS TO FEET, MULTIPLY BY 3.2808
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY
0.5 METER CONTOURS—DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.4 METER

BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC
ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225
AND NATIONAL OCEAN SERVICE, ROCKVILLE, MARYLAND 20852
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

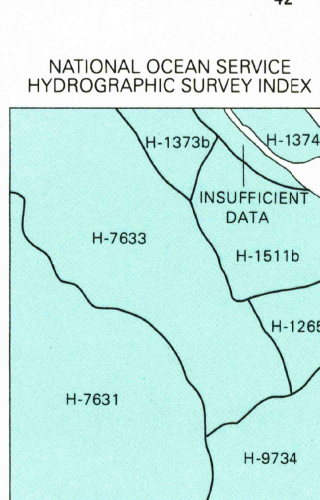

ROAD CLASSIFICATION
Primary highway, hard surface
Secondary highway, hard surface
Light-duty road, hard or improved surface
Unimproved road
Interstate Route
U.S. Route
State Route
County Route
RECEIVED
AUG 31 1998
USGS NMD
HISTORICAL MAP ARCHIVES
CROOKED ISLAND, FLA.
1994
NIMA 3843 1 NE—SERIES V8470