


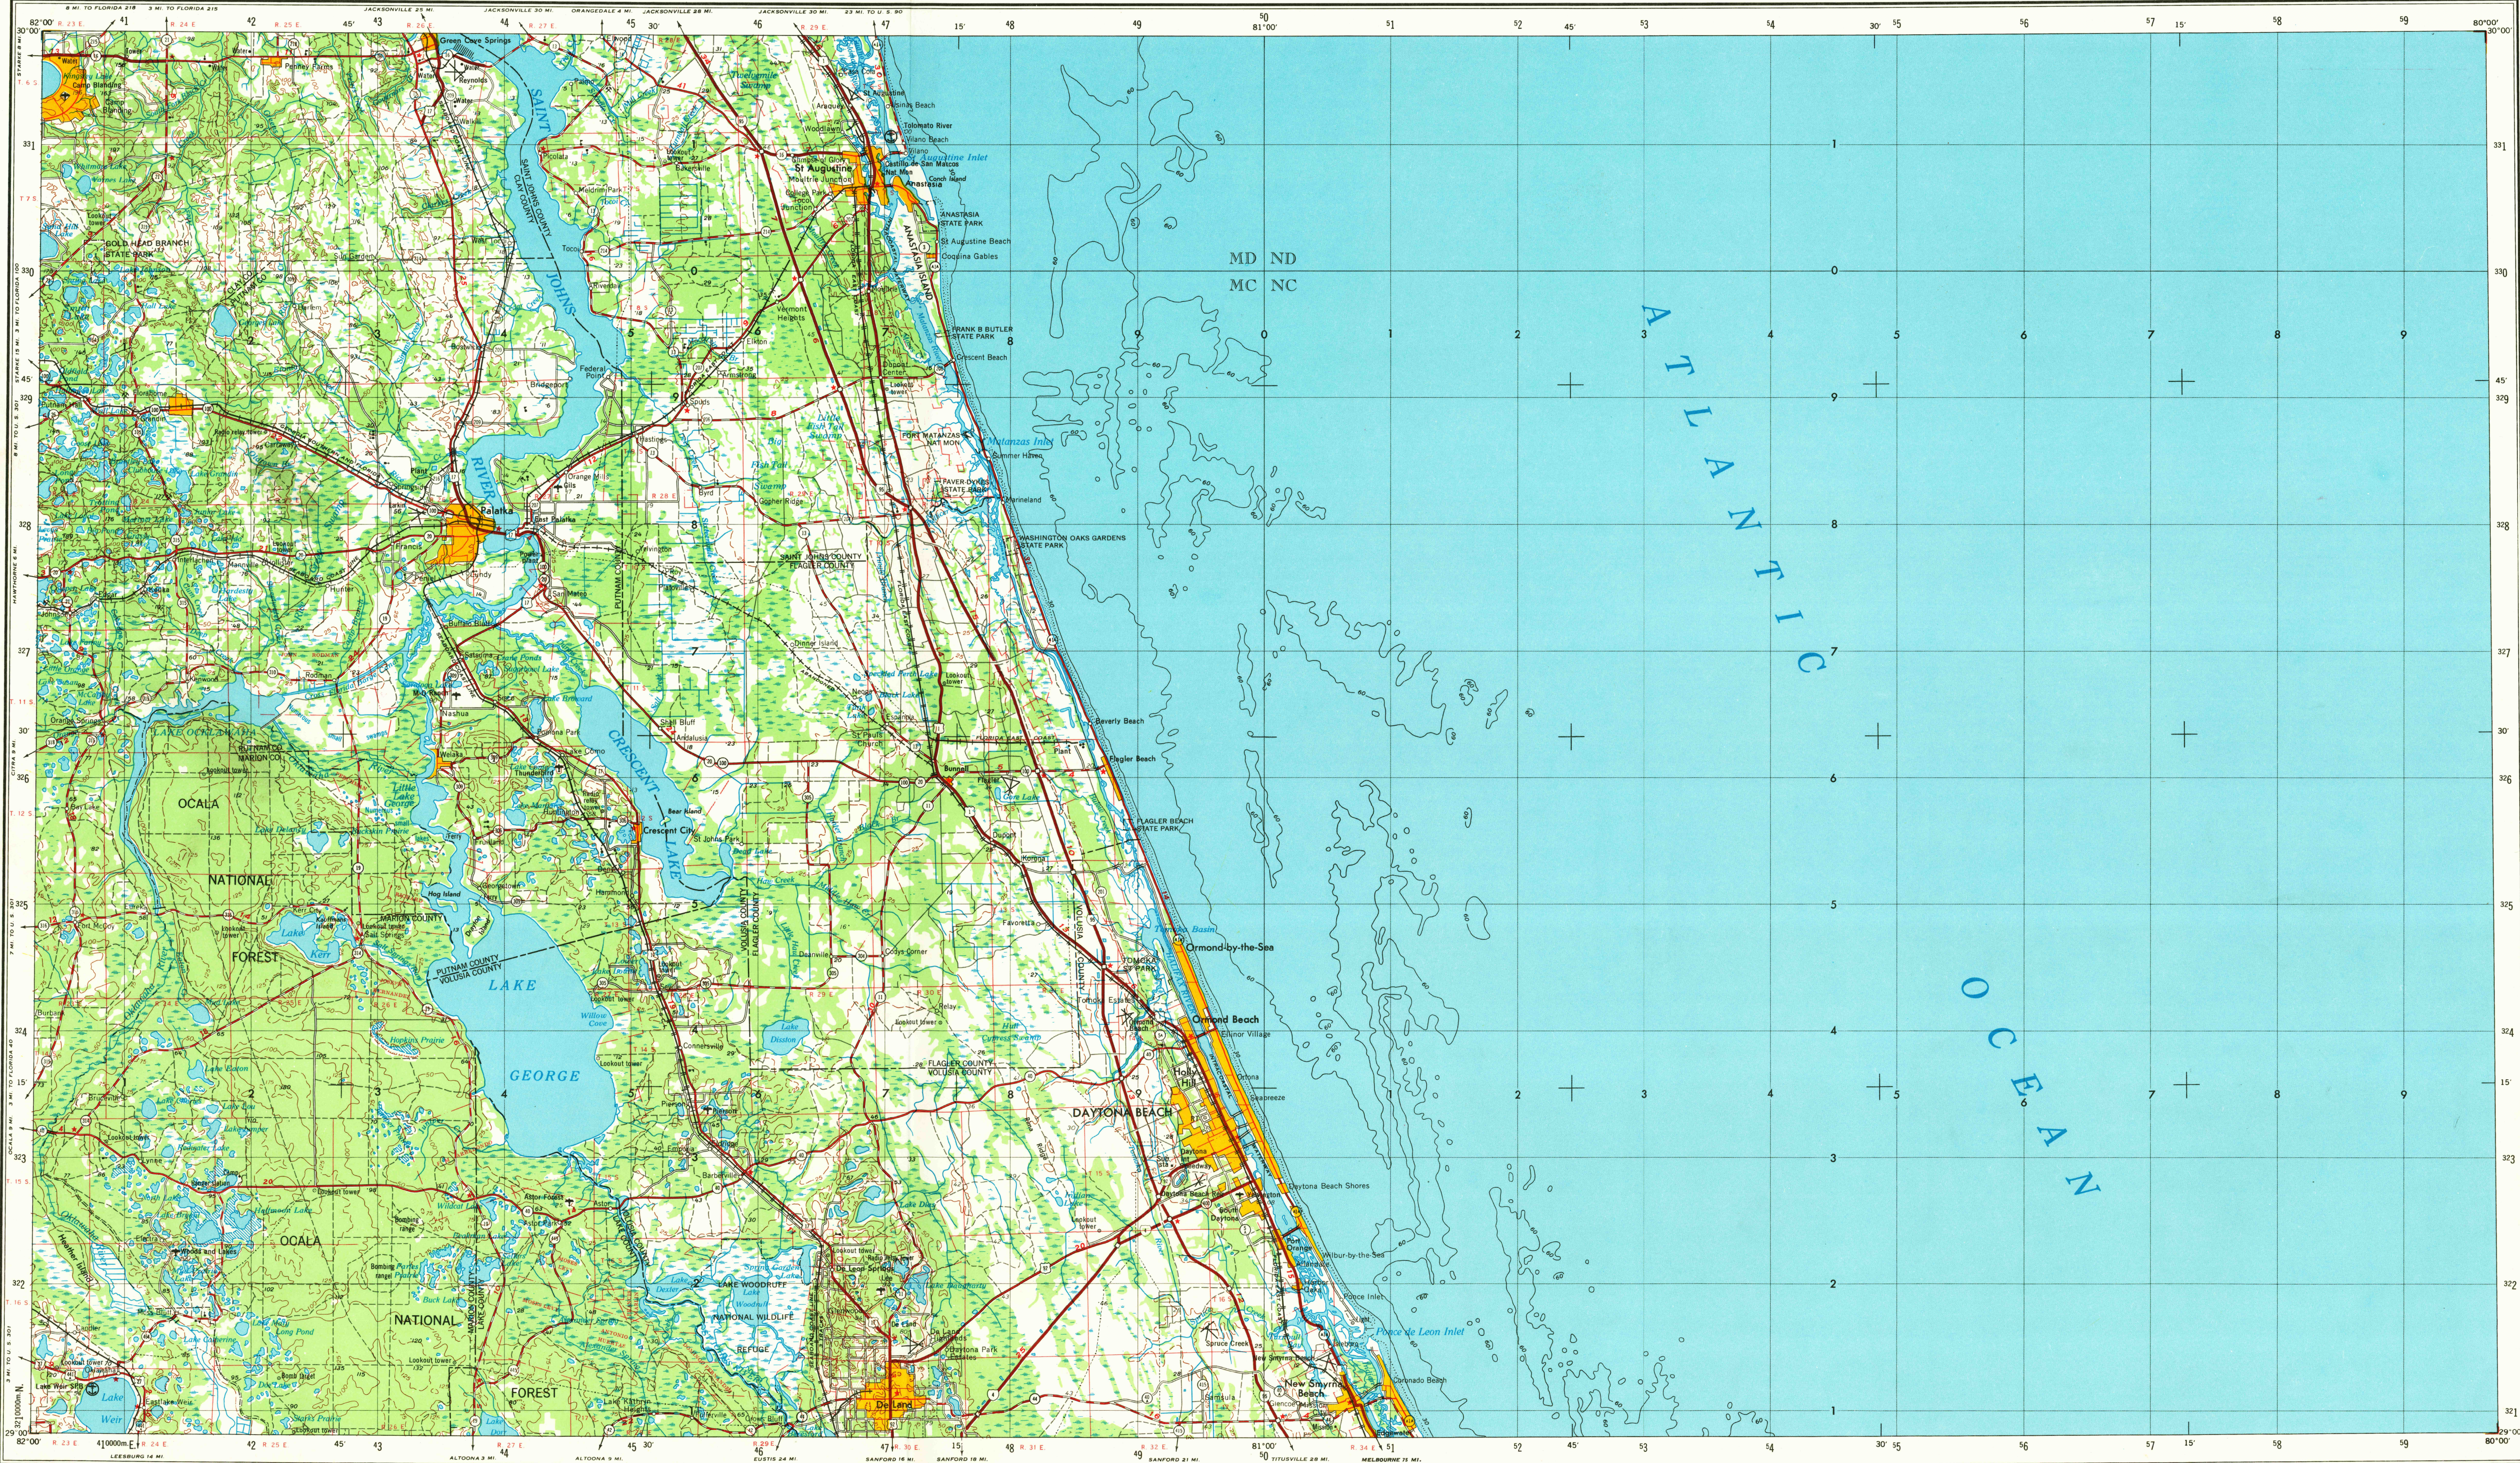

V501, EDITION 3

Prepared by the U.S. Army Topographic Command (AECGN), Washington, D.C. Compiled in 1955 by photogrammetric methods and from United States quadrangles, 1:62,500 and 1:50,000, 1912-47; USGS charts, 1953. Planimeter revised in part from aerial photographs taken 1950. Photographs field annotated 1954. Revised in 1972 by the U.S. Geological Survey from aerial photographs taken 1972.

Selected hydrographic data compiled from USCGS charts. This information is not intended for navigational purposes.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

RAILROADS

Single track
Double or multiple track
Standard gauge
Narrow gauge
Landing area

BOUNDARIES

International
State
County
Park or reservation
Spot elevation in feet

ROADS

Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, hard or improved surface
Fair or dry weather, unimproved surface
Fair or dry weather, unimproved surface
Interchange

ROUTE MARKERS

Interstate, U.S., State
Landmarks: School, Church, Other
Limit of danger: Reef
Rocks: Awash
Foreshore flat
Intermittent or dry stream
Marsh or swamp

Other features:

Landplane airport
Depth curve in feet
Seaplane airport
Orchard
Power line; Mine
Woods: brushwood

Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles

0 5 10 15 20 25 30 Kilometers

0 5 10 15 20 25 30 Nautical Miles


CONTOUR INTERVAL 50 FEET
WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID. ZONE 17

17° 0' MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 17° 0' MILES FOR THE CENTER OF THE WEST EDGE TO 2° 0' MILES WESTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092

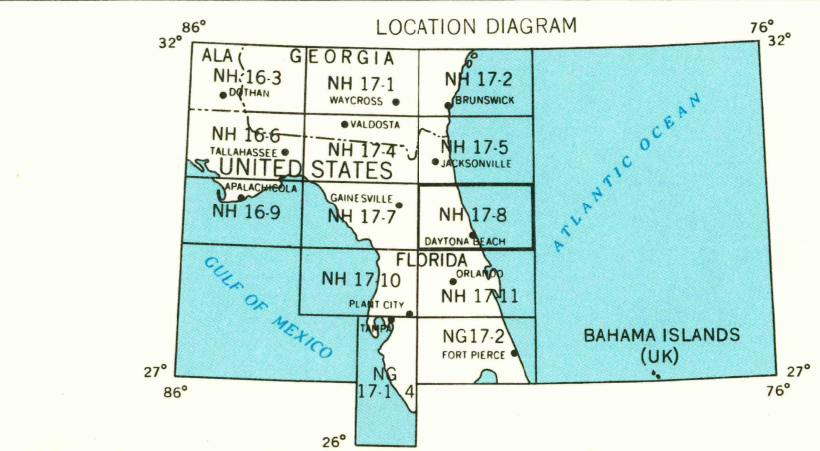

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION: 17N

10,000 M. SQUARE IDENTIFICATION

MD	ND
MC	NC

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

EXAMPLE POINT: HUNTINGTON

1. Read letters identifying 100,000 meter square in which the point lies. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.

2. Estimate tenths from grid line to point. Estimate tenths from grid line to point on the line itself.

3. Locate first HORIZONTAL grid line below point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.

4. Estimate tenths from grid line to point.

5. If reading beyond 10' in any direction, prefix Grid Zone Designation, as: 17NMC4537

USGS
Historical File
Topographic Division

DAYTONA BEACH, FLORIDA
REVISED 1972

STOCK NO V501XNH178**03

MAR 28 1974
9000
50 plan