

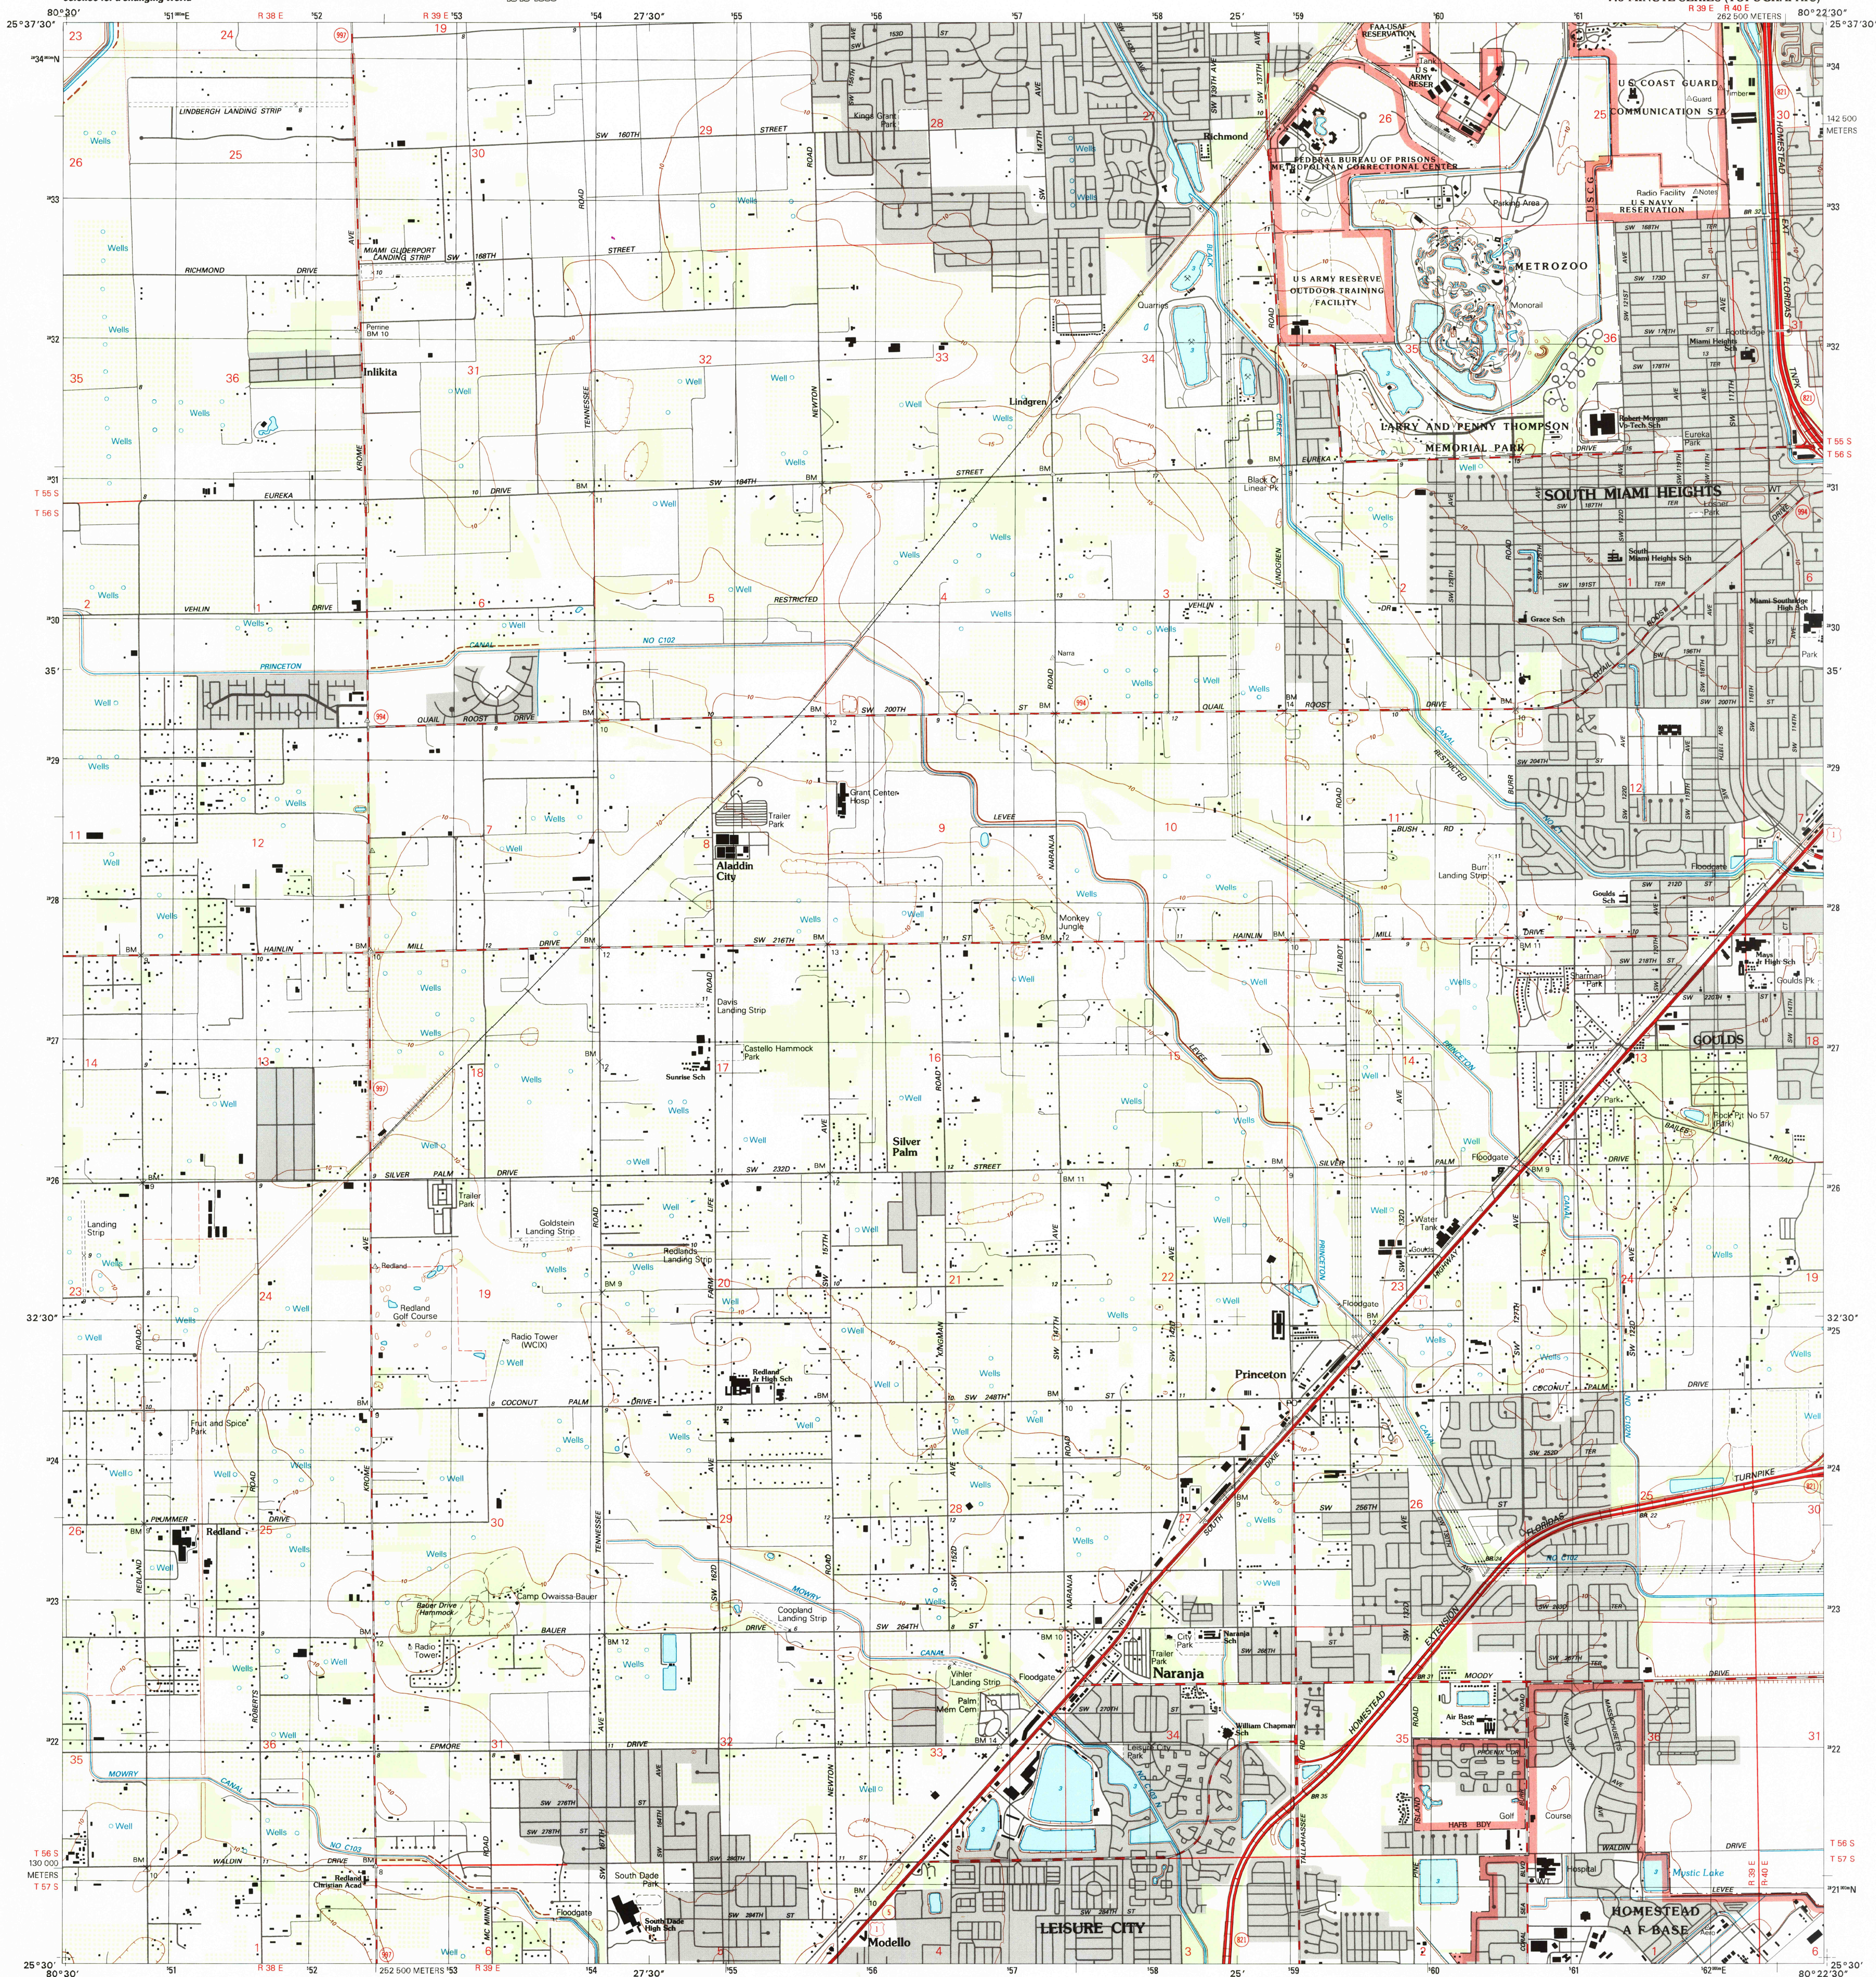


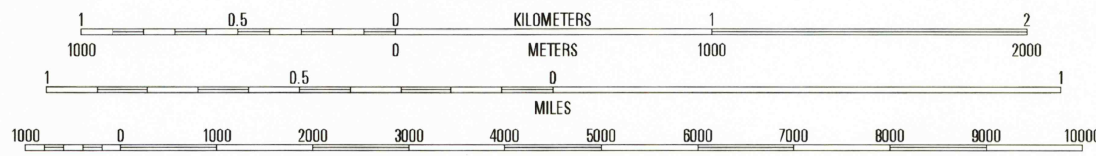

Produced by the United States Geological Survey
Topography compiled 1936. Planimetry derived from imagery taken 1994 and other sources. Public Land Survey System and survey control current as of 1987.
North American Datum of 1983 (NAD 83). Projection and 1 000-meter grid: Universal Transverse Mercator, zone 17 2 500-meter ticks: Florida Coordinate System of 1983 (east zone)
North American Datum of 1927 (NAD 27) is shown by dashed corner ticks. The values of the shift between NAD 83 and NAD 27 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.
There may be private inholdings within the boundaries of the National or State reservations shown on this map.
Dotted land lines established by Dade County.
Landmark buildings verified 1987.



CONTOUR INTERVAL 5 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



QUADRANGLE LOCATION

1	2	3
4	5	6
7	8	

ROAD CLASSIFICATION

Primary highway
hard surface
Light-duty road, hard or improved surface
Secondary highway
hard surface
Unimproved road

Interstate Route
U.S. Route
State Route

RECEIVED
SEP 30 1999

USGS NMD
HISTORICAL MAP ARCHIVES
GOULDS, FL
1994

NIMA 4935 13 SW-SERIES V847

